Joseph Lstiburek, Ph.D., P.Eng, ASHRAE Fellow

Building Science

Adventures In Building Science

www.buildingscience.com

Environmental Separation

Definition of a Building

A Building is an Environmental Separator

- Control heat flow
- Control airflow
- Control water vapor flow
- Control rain
- Control ground water
- Control light and solar radiation
- Control noise and vibrations
- Control contaminants, environmental hazards and odors
- Control insects, rodents and vermin
- Control fire
- Provide strength and rigidity
- Be durable
- Be aesthetically pleasing
- Be economical

Some Physics….

Arrhenius Equation

For Every 10 Degree K Rise

Reaction Rate Doubles

$$k = A e^{-E_a/(RT)}$$

Damage Functions

Water

Heat

Ultra-violet Radiation

2nd Law of Thermodynamics

Heat Flow Is From Warm To Cold

Moisture Flow Is From Warm To Cold

Moisture Flow Is From More To Less

Air Flow Is From A Higher Pressure to a Lower Pressure

Gravity Acts Down

Moisture Flow Is From Warm To Cold

Moisture Flow Is From More To Less

Moisture Flow Is From Warm To Cold

Moisture Flow Is From More To Less

Thermal Gradient – Thermal Diffusion

Concentration Gradient – Molecular Diffusion

Moisture Flow Is From Warm To Cold

Moisture Flow Is From More To Less

Thermal Gradient – Thermal Diffusion

Concentration Gradient – Molecular Diffusion

Vapor Diffusion

Thermodynamic Potential

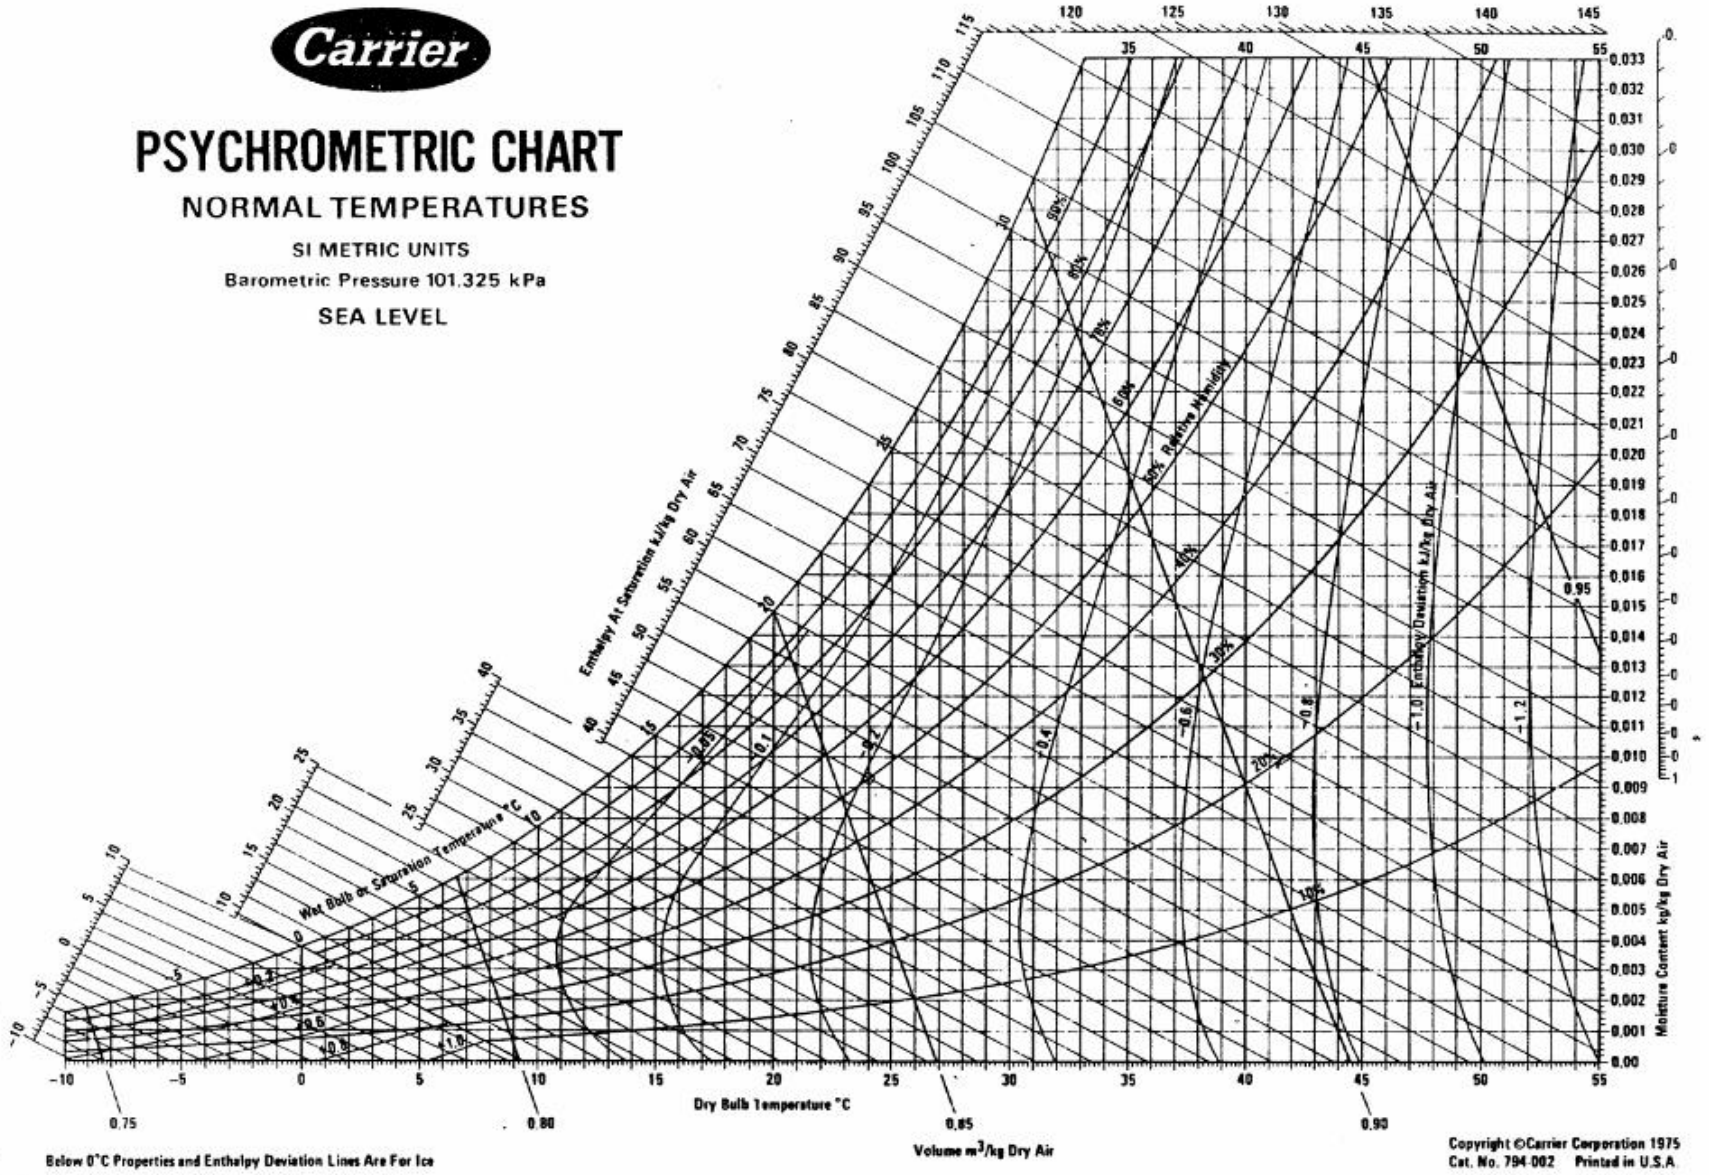
Carrier
PSYCHROMETRIC CHART
NORMAL TEMPERATURES
SI METRIC UNITS
Barometric Pressure 101.325 kPa
SEA LEVEL
Dry Bulb Temperature °C
Wet Bulb or Saturation Temperature °C
Enthalpy At Saturation kJ/kg Dry Air
Moisture Content kg/kg Dry Air
Volume m³/kg Dry Air
Below 0°C Properties and Enthalpy Deviation Lines Are For Ice
Copyright ©Carrier Corporation 1975
Cat. No. 794-002 Printed in U.S.A.

The Effect of Climate


Subarctic/Arctic
Very Cold
Marine
Cold
Mixed-Humid
Mixed-Dry
Hot-Humid
Hot-Dry

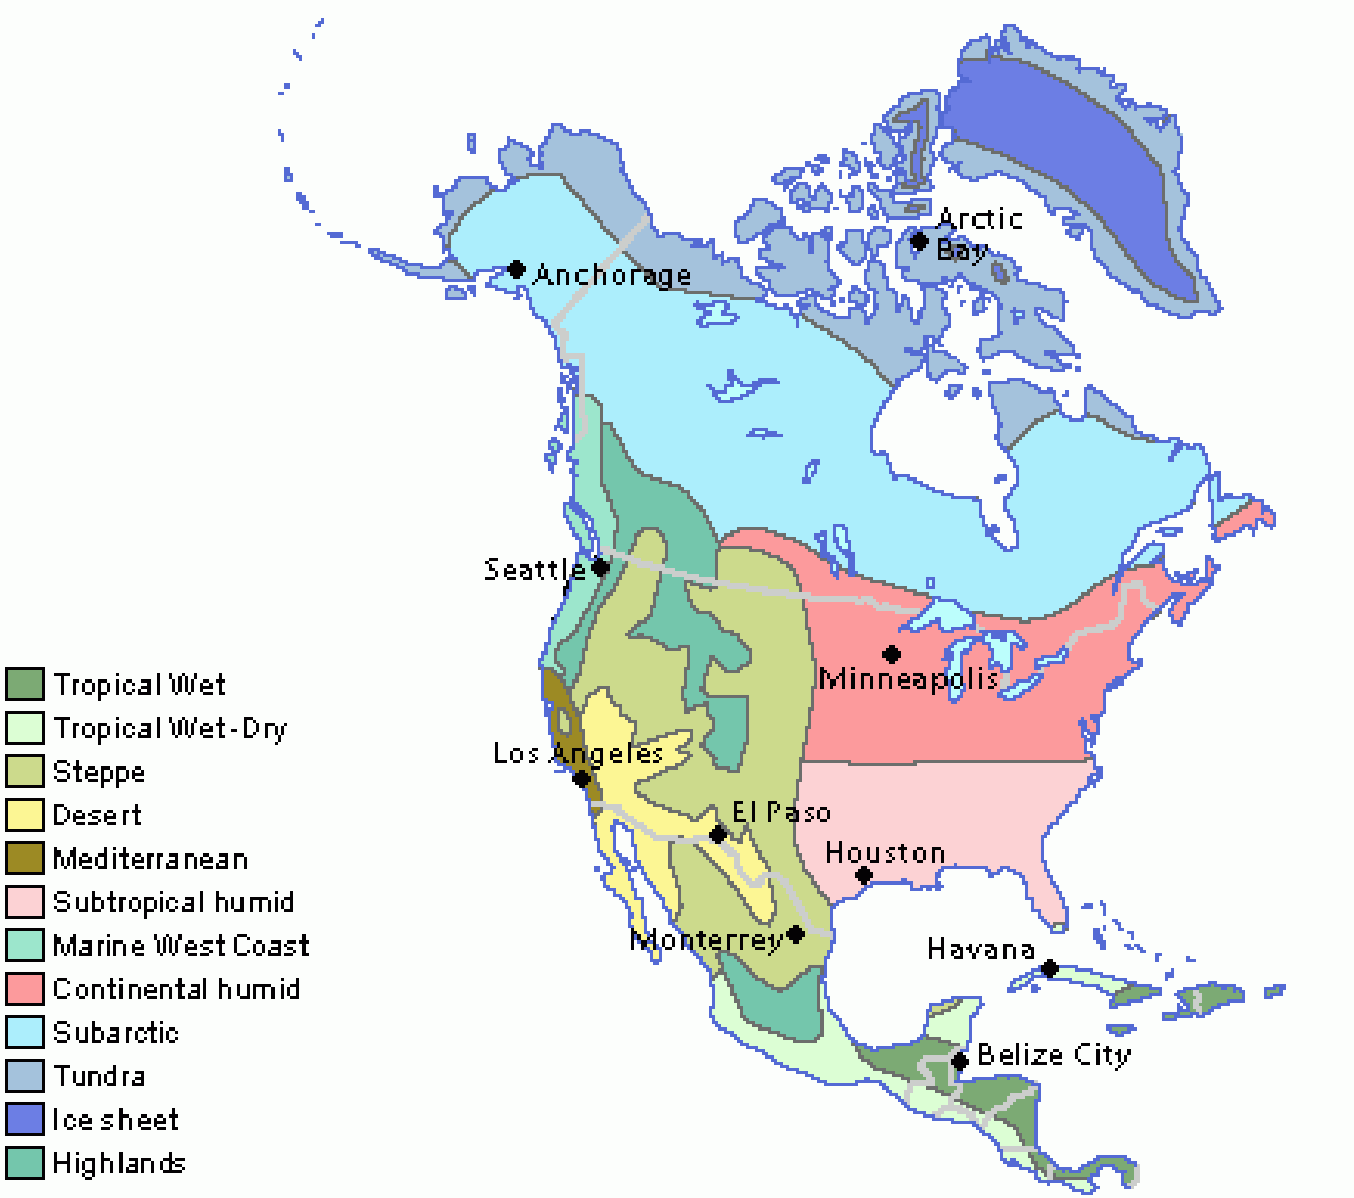
Arctic Bay
Anchorage
Seattle
Minneapolis
Los Angeles
El Paso
Houston
Monterrey
Havana
Belize City
Tropical Wet
Tropical Wet-Dry
Steppe
Desert
Mediterranean
Subtropical humid
Marine West Coast
Continental humid
Subarctic
Tundra
Ice sheet
Highlands

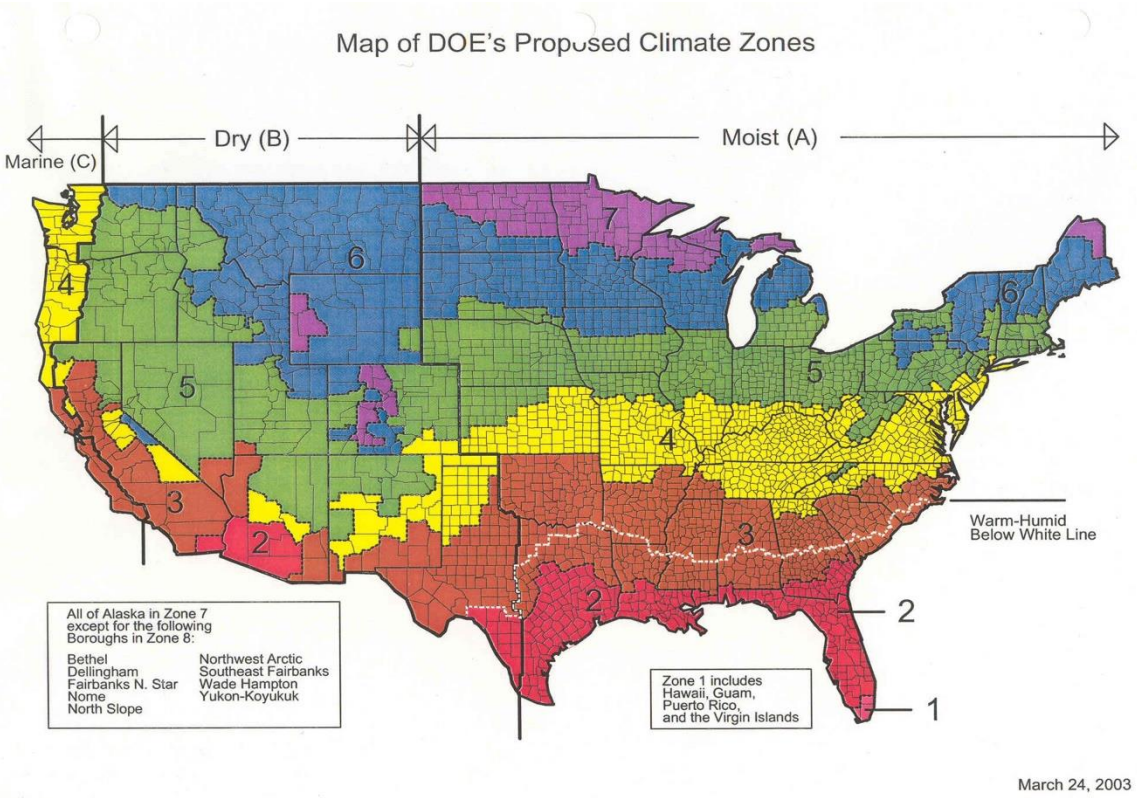
Map of DOE's Proposed Climate Zones
Marine (C)
Dry (B)
Moist (A)
Warm-Humid
Below White Line
All of Alaska in Zone 7
except for the following
Boroughs in Zone 8:
Bethel
Dellingham
Fairbanks N. Star
Nome
North Slope
Northwest Arctic
Southeast Fairbanks
Wade Hampton
Yukon-Koyukuk
Zone 1 includes
Hawaii, Guam,
Puerto Rico,
and the Virgin Islands
March 24, 2003

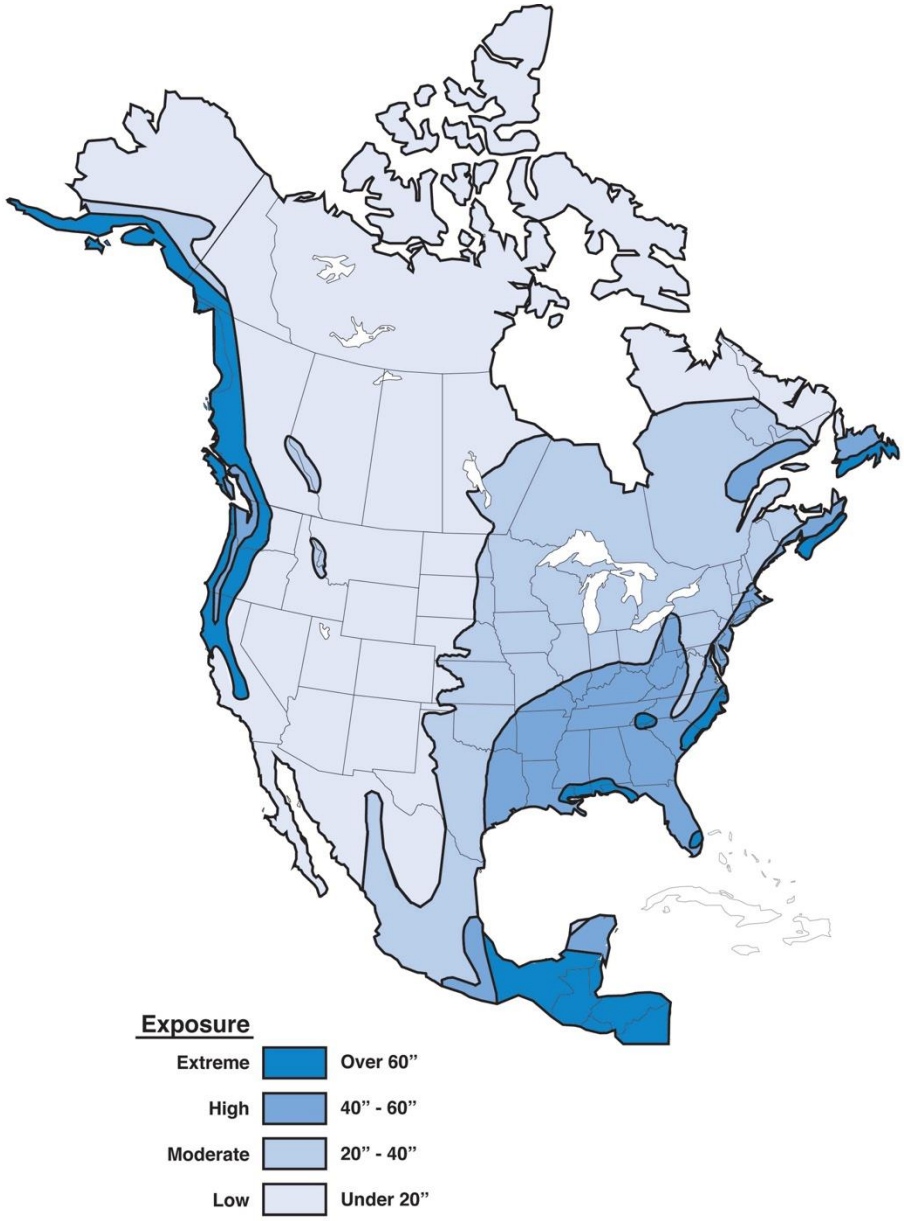
Exposure
Extreme
Over 60”
High
40” - 60”
Moderate
20” - 40”
Low
Under 20”

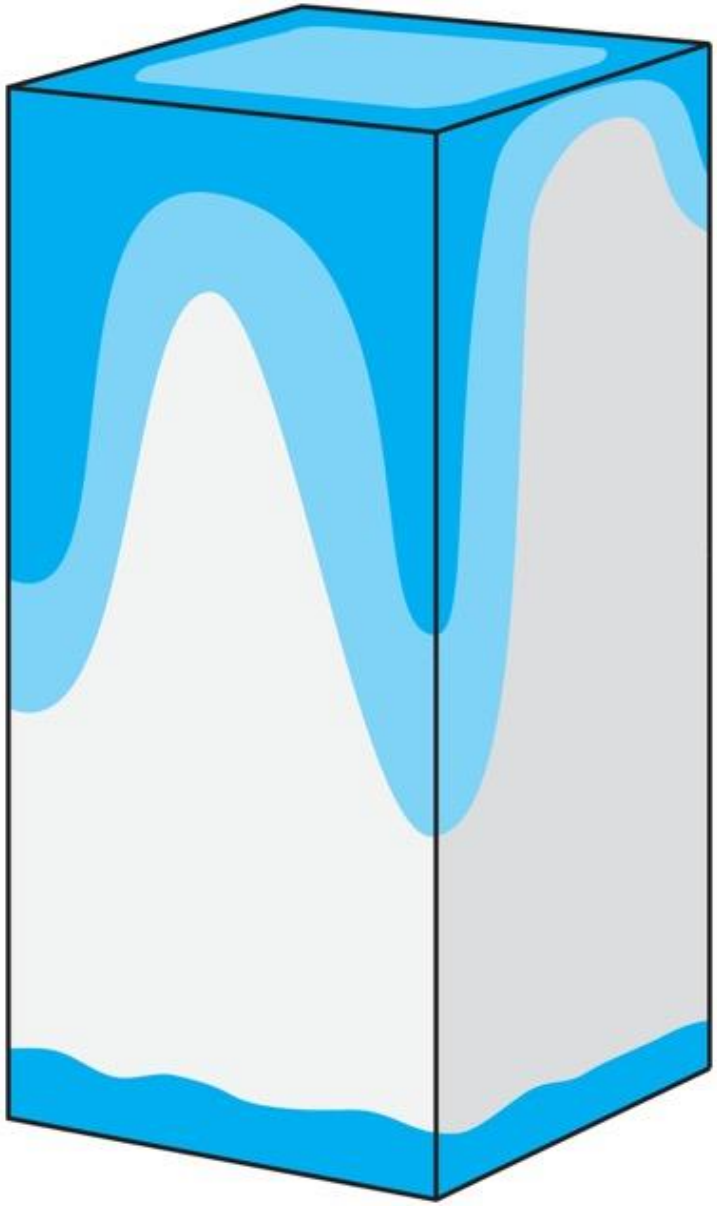

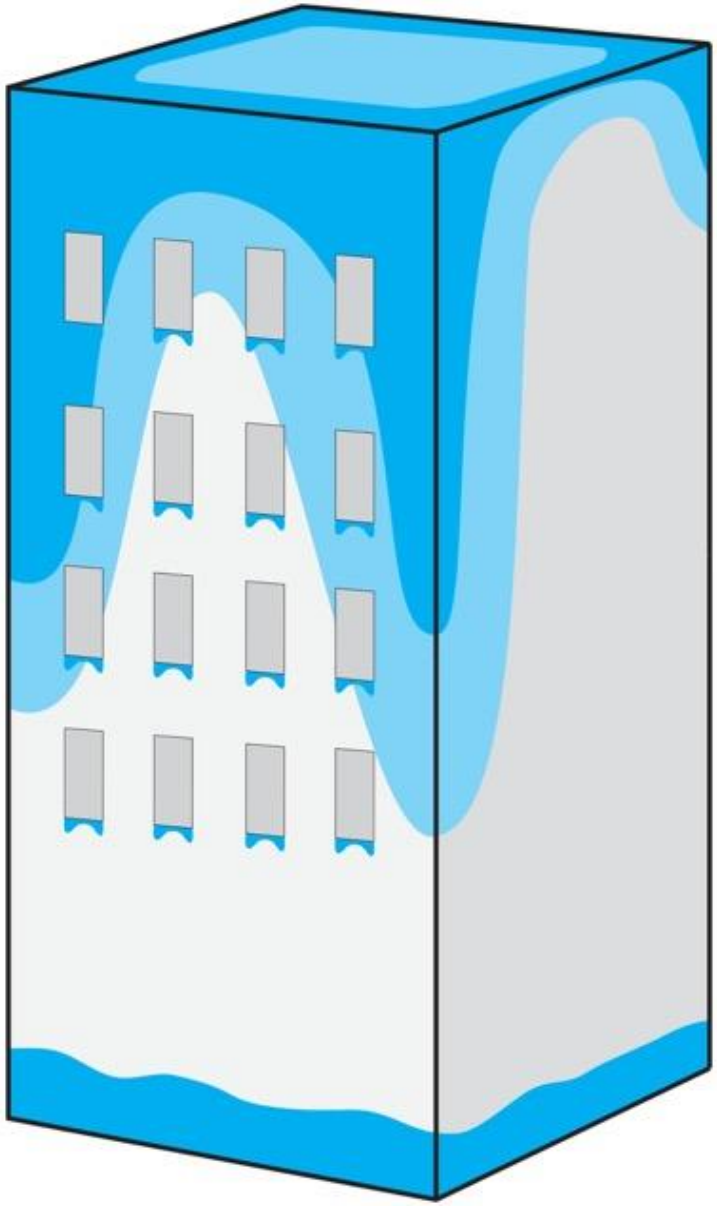

The Perfect Wall

Water Control Layer

Air Control Layer

Vapor Control Layer

Thermal Control Layer

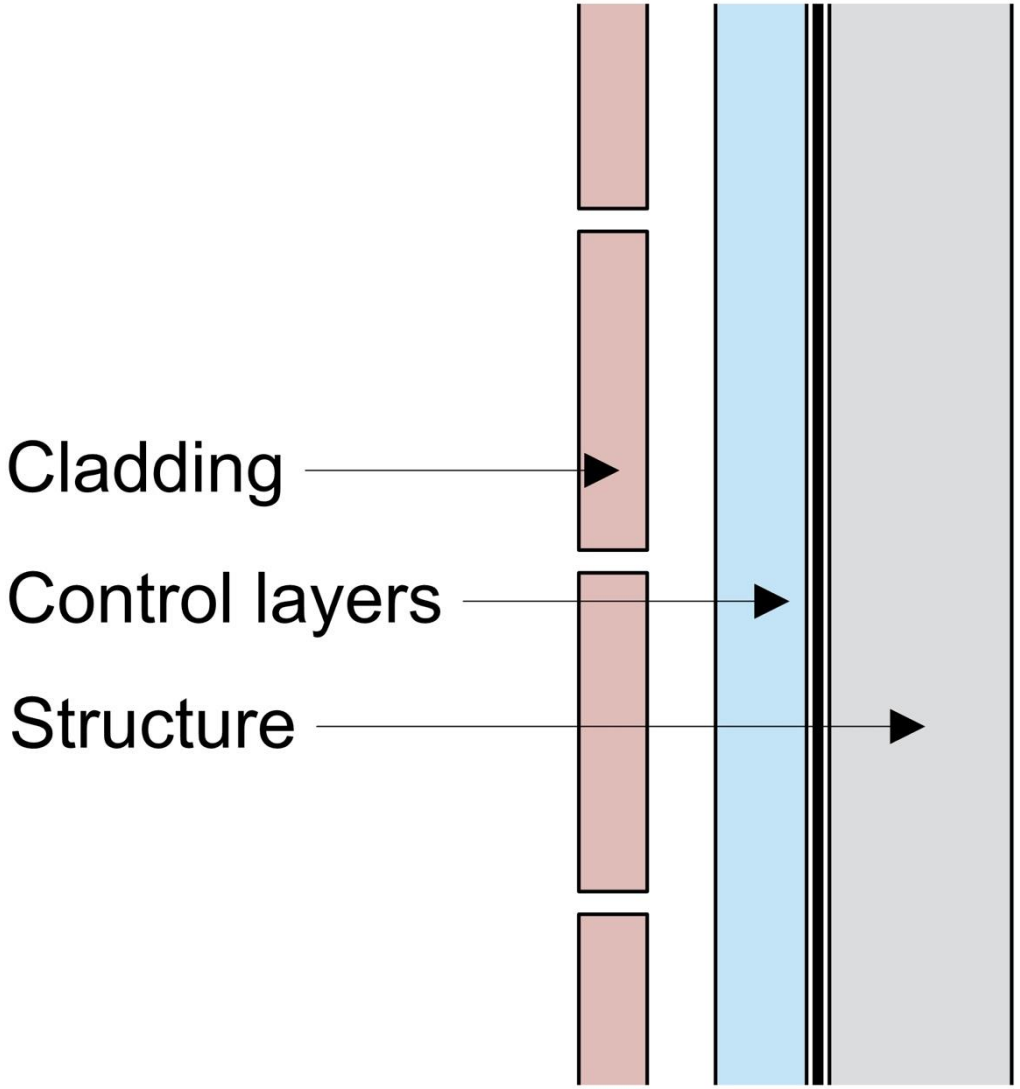
Cladding
Control layers
Structure

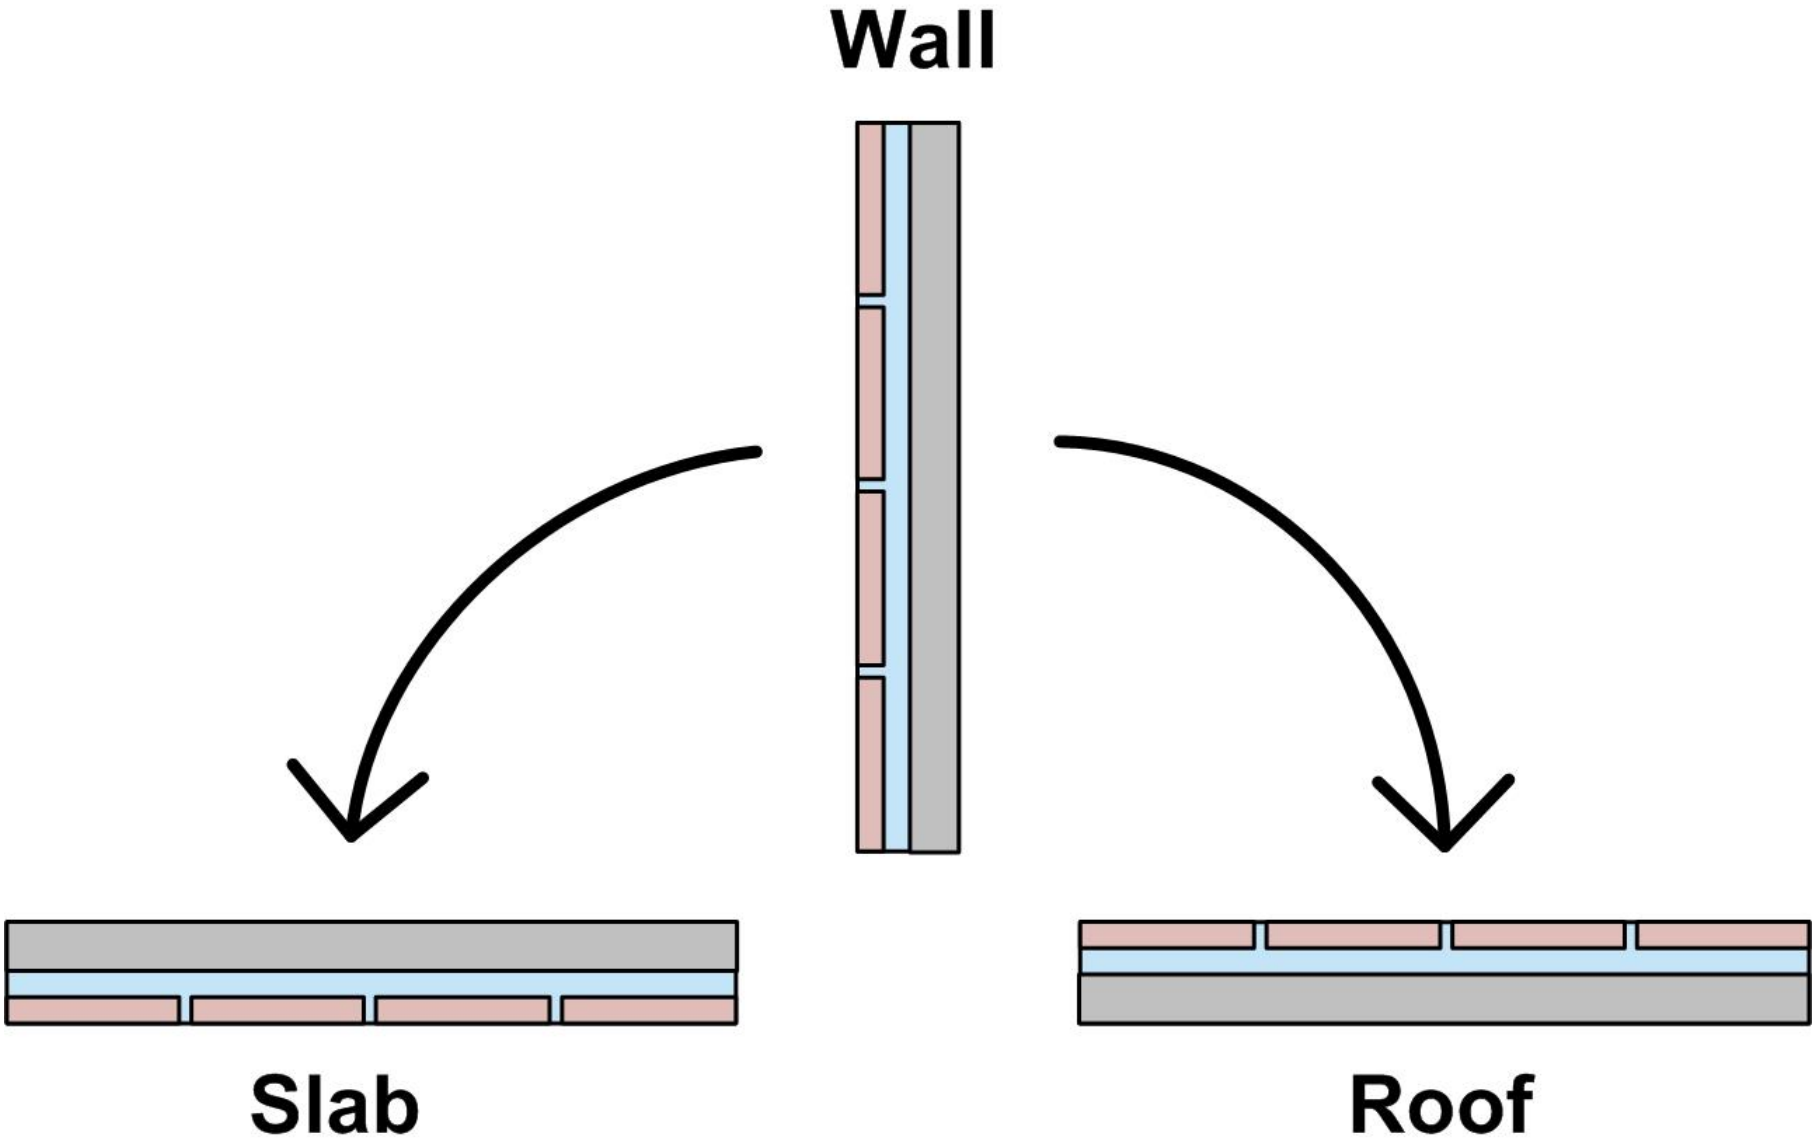
Wall
Slab
Roof

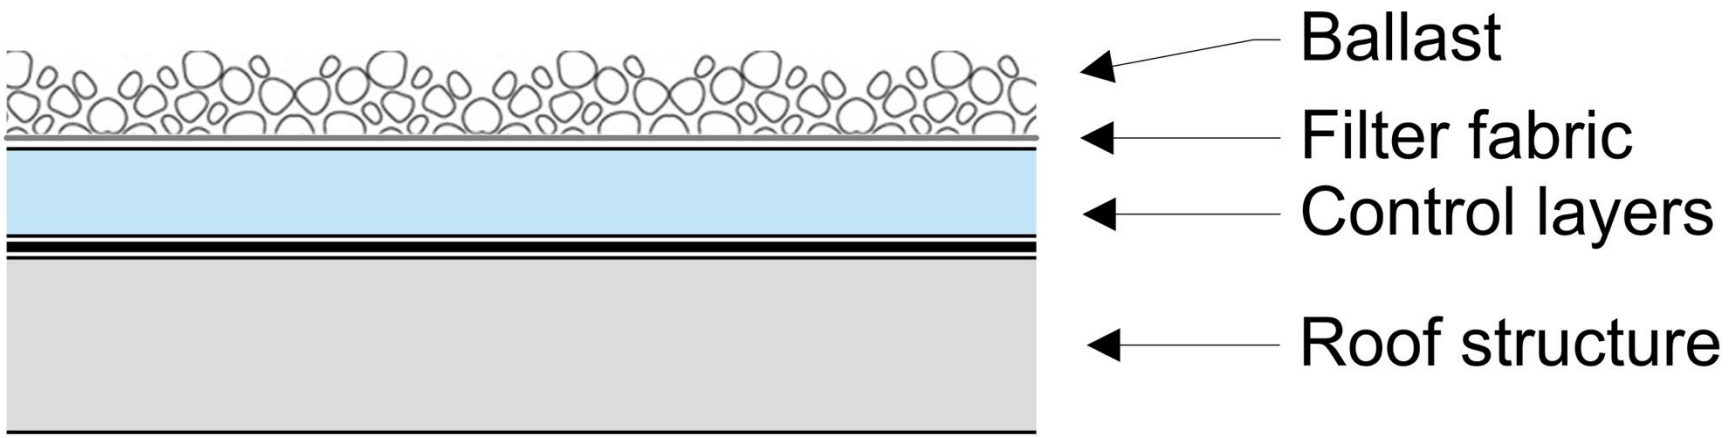
Ballast
Filter fabric
Control layers
Roof structure

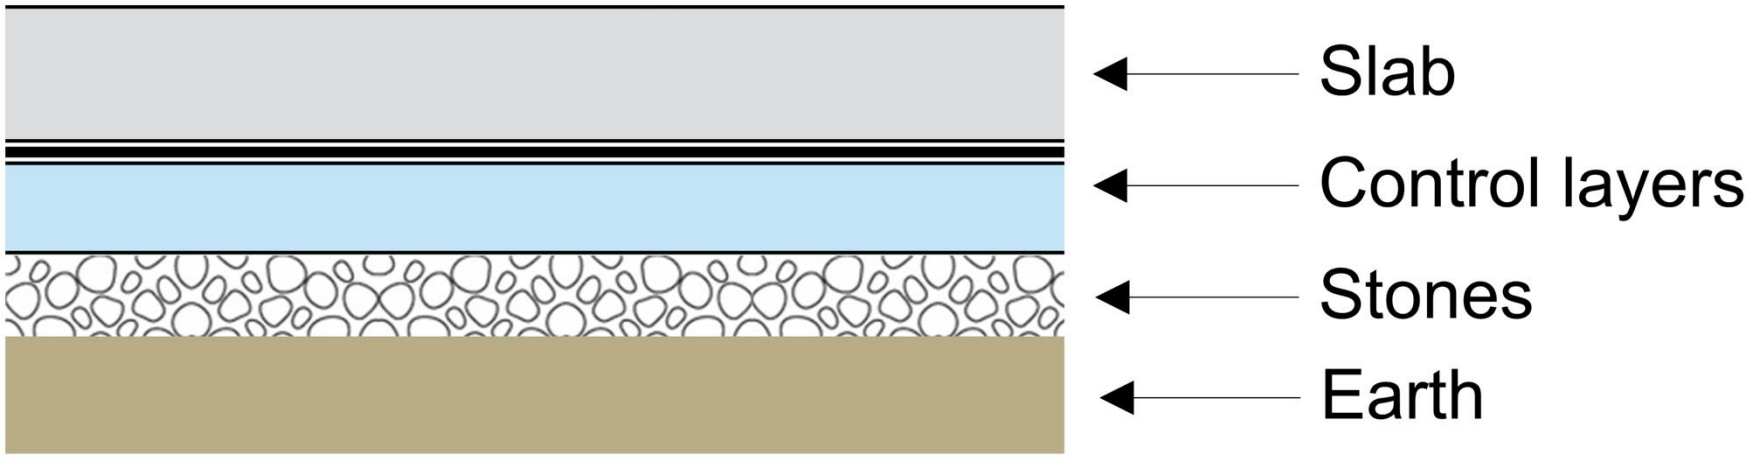
Slab
Control layers
Stones
Earth

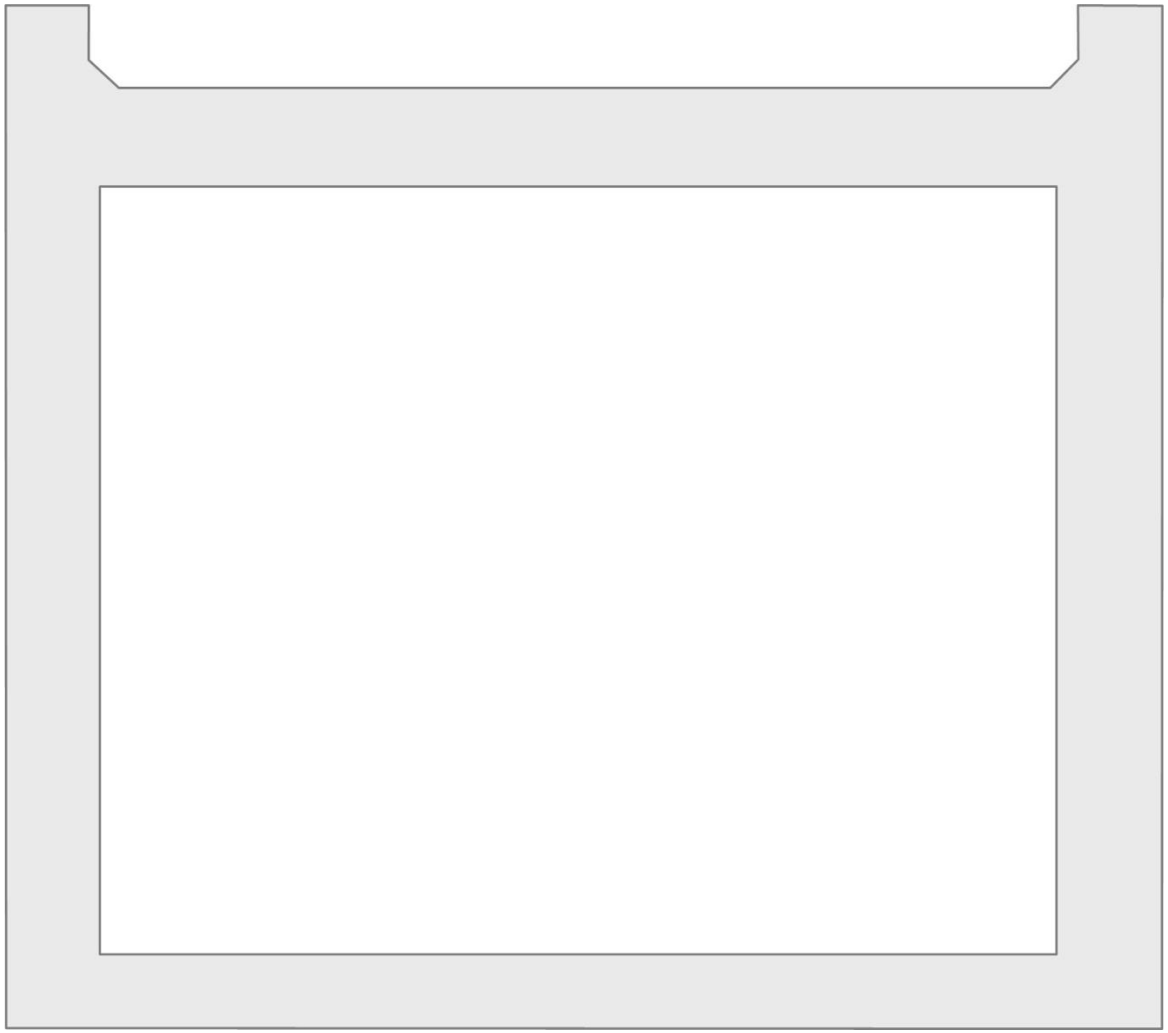

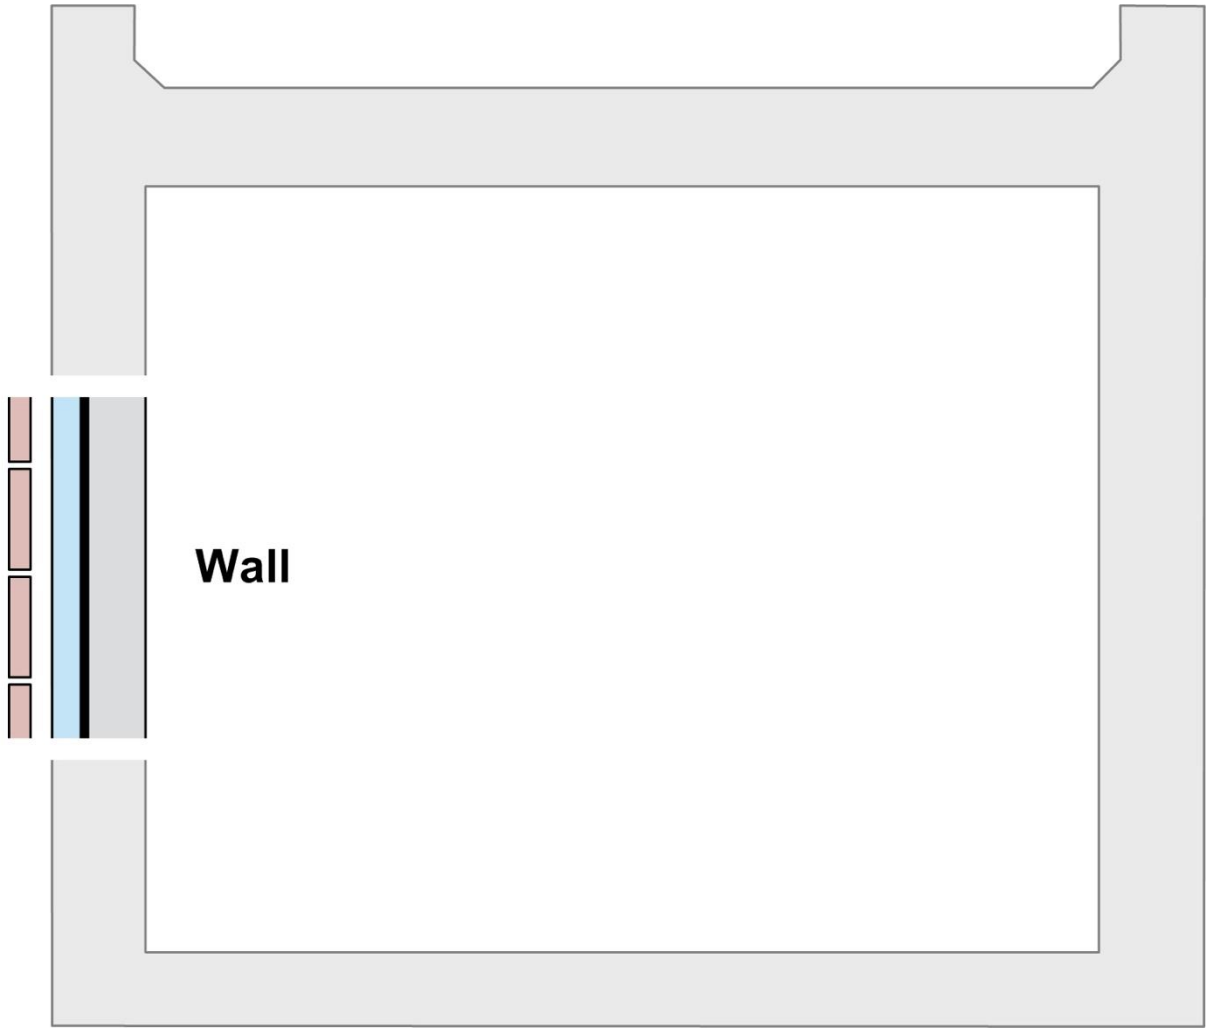
Wall

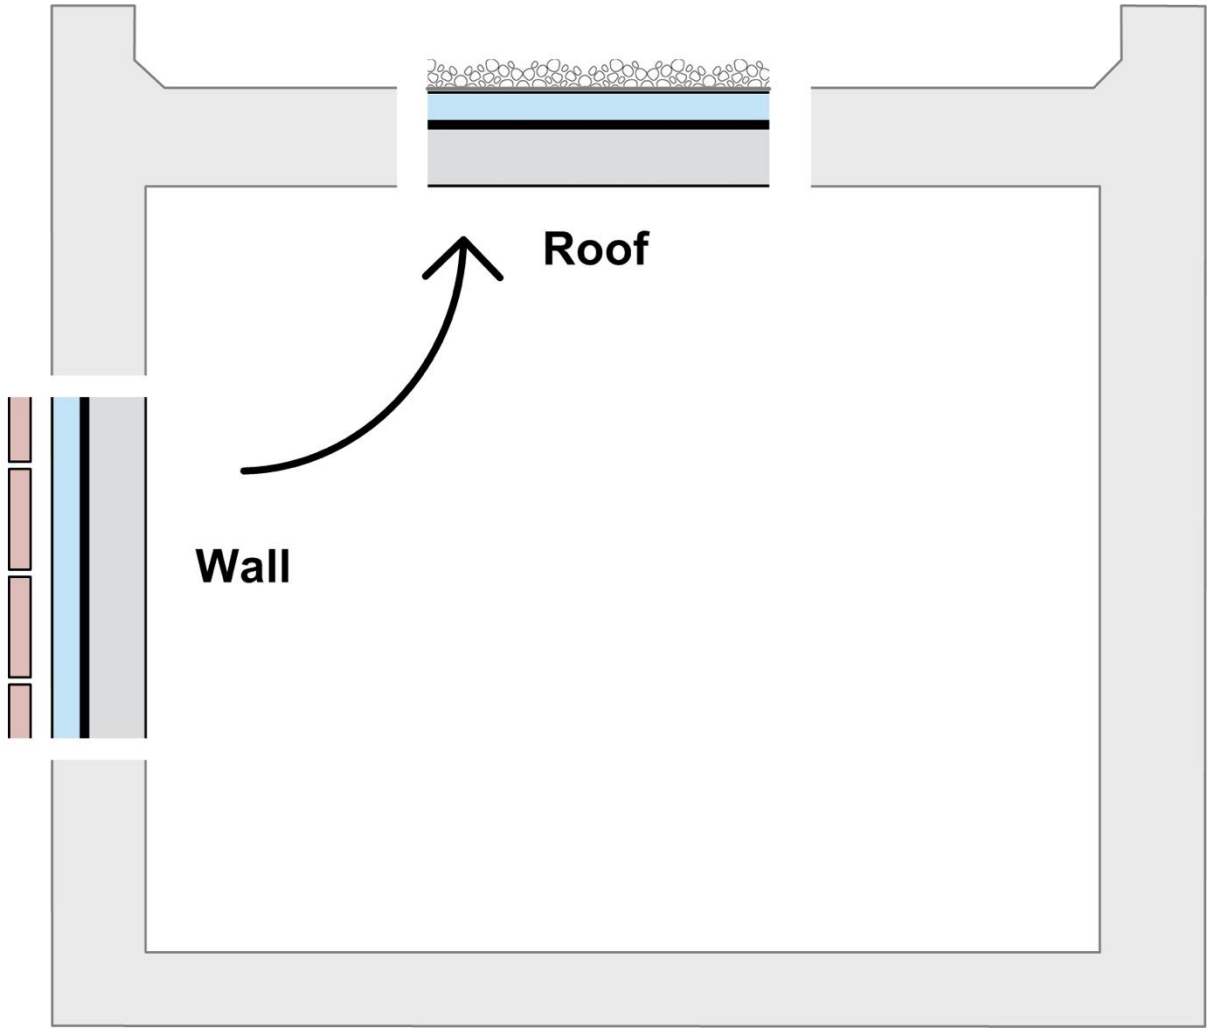
Roof
Wall

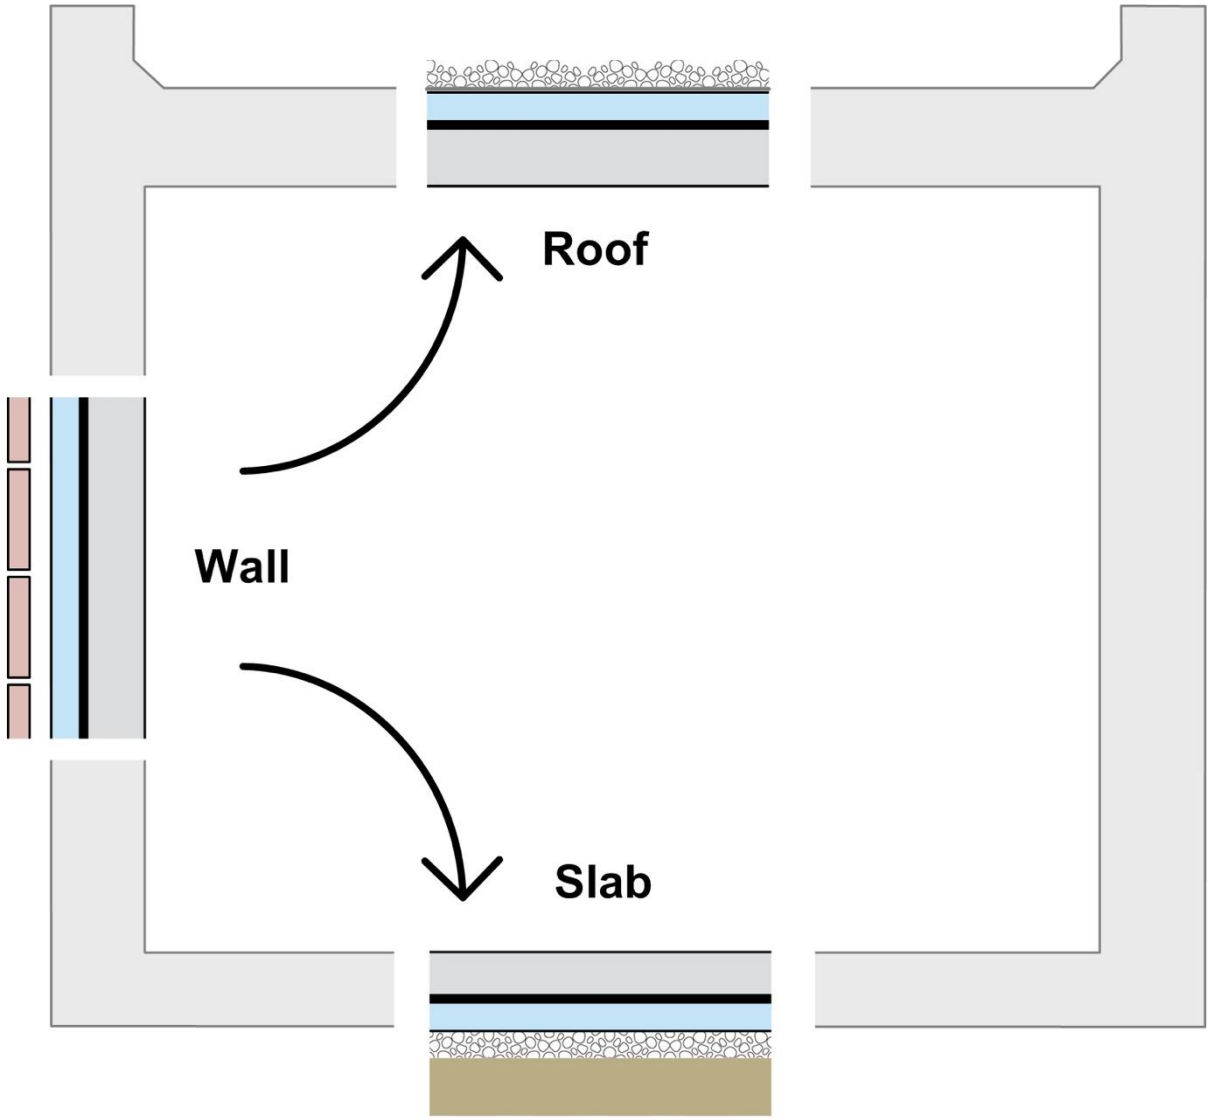
Roof
Wall
Slab

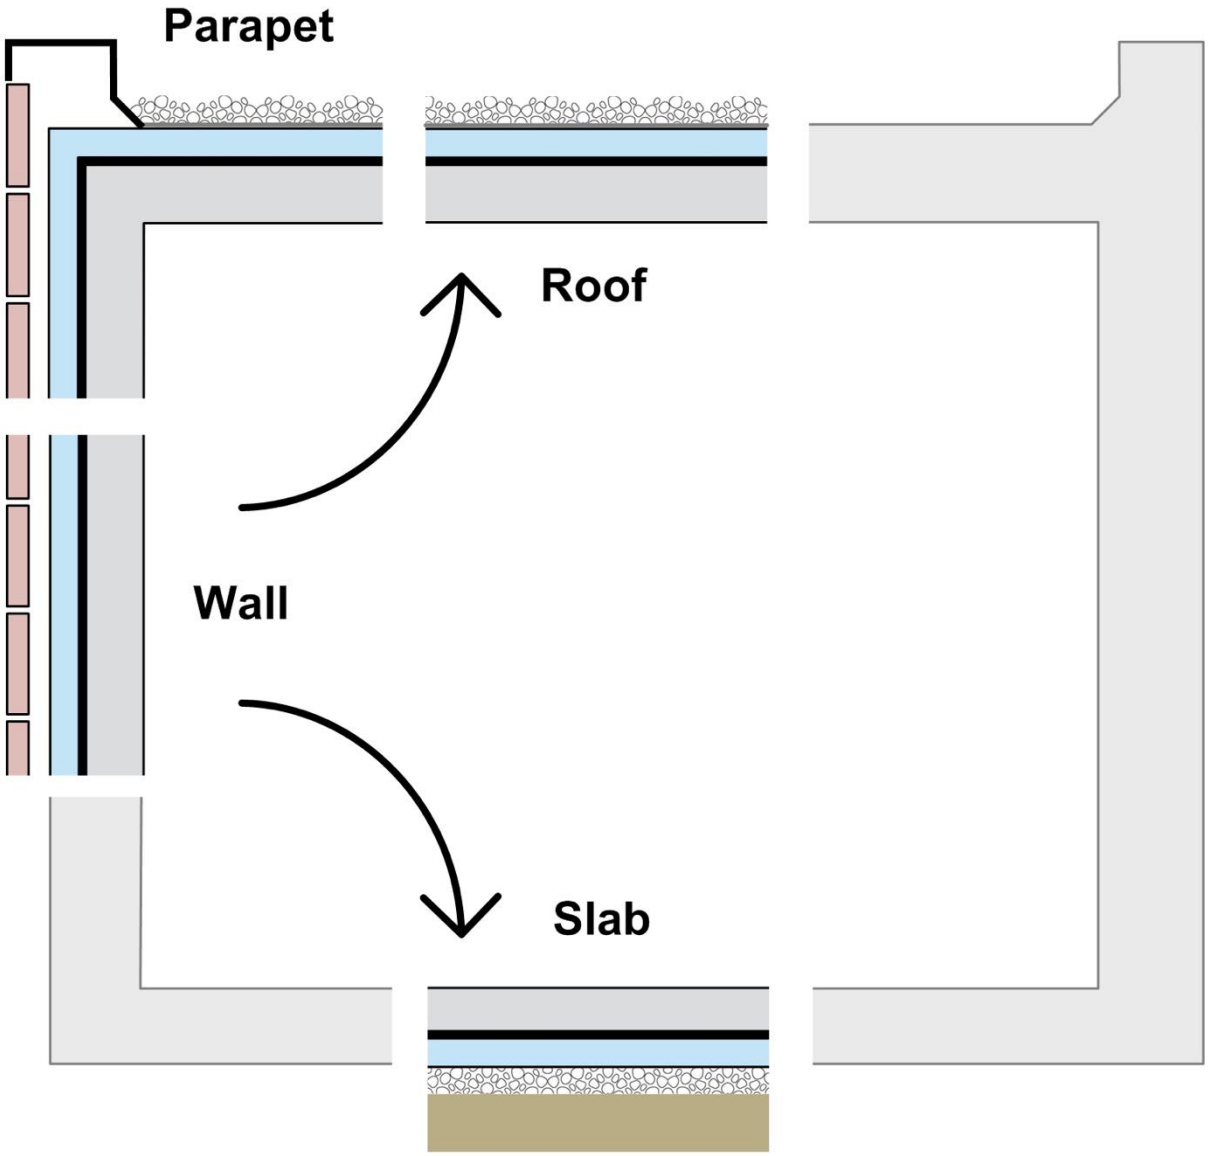
Parapet
Roof
Wall
Slab

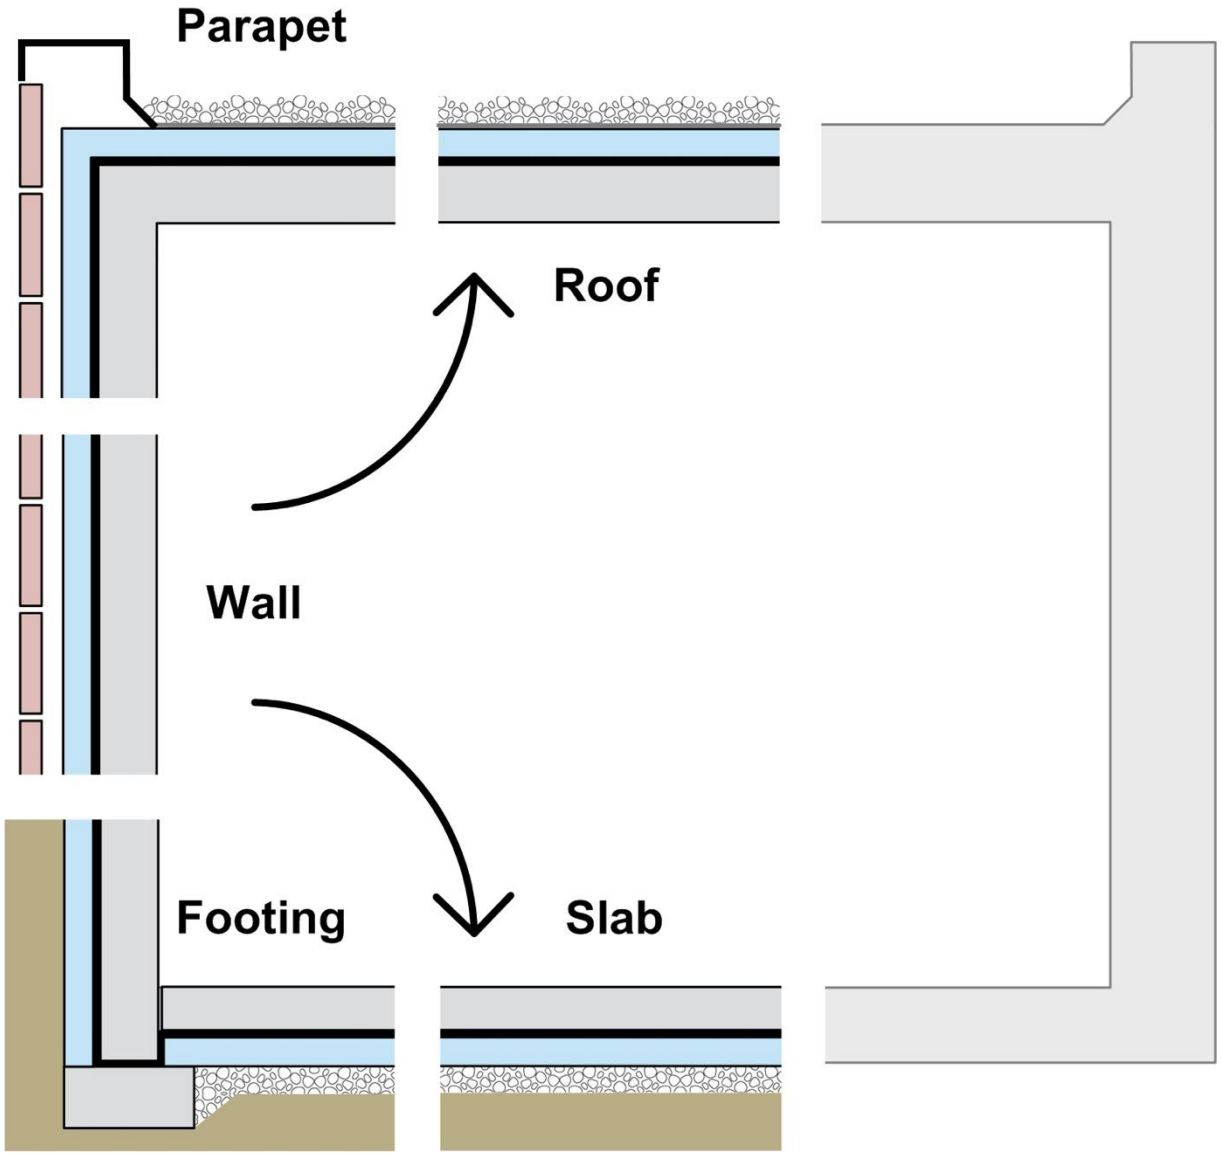
Parapet
Roof
Wall
Footing
Slab

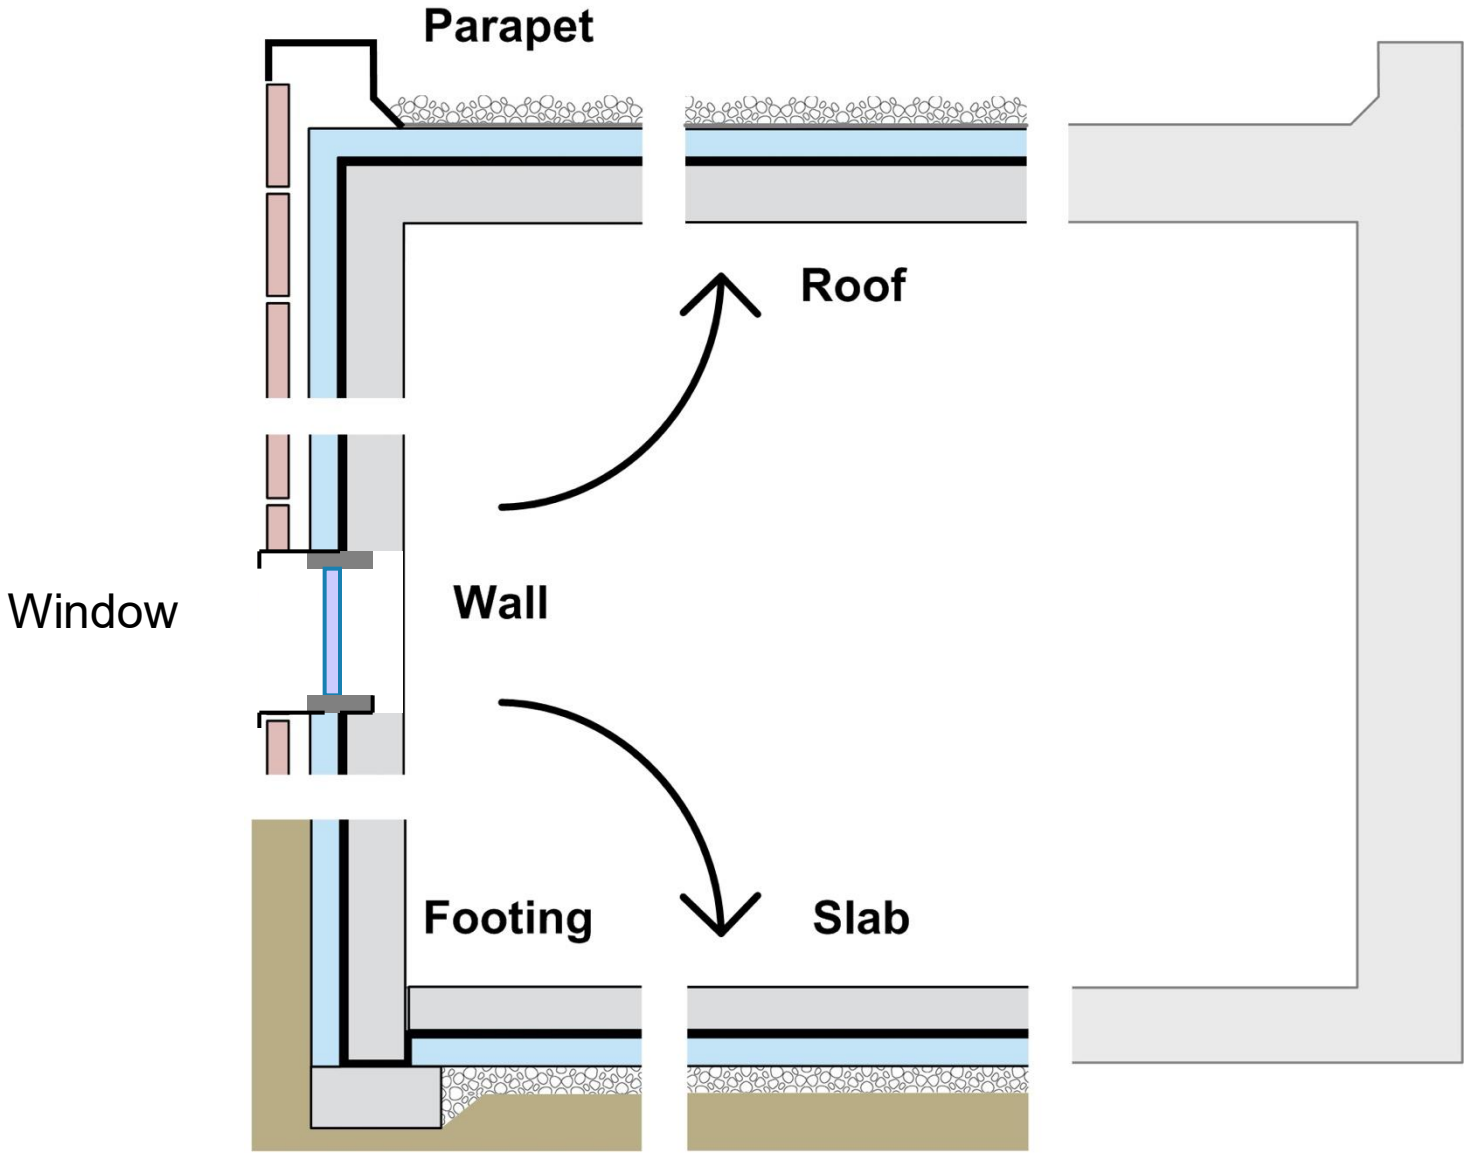
Parapet
Roof
Window
Wall
Footing
Slab

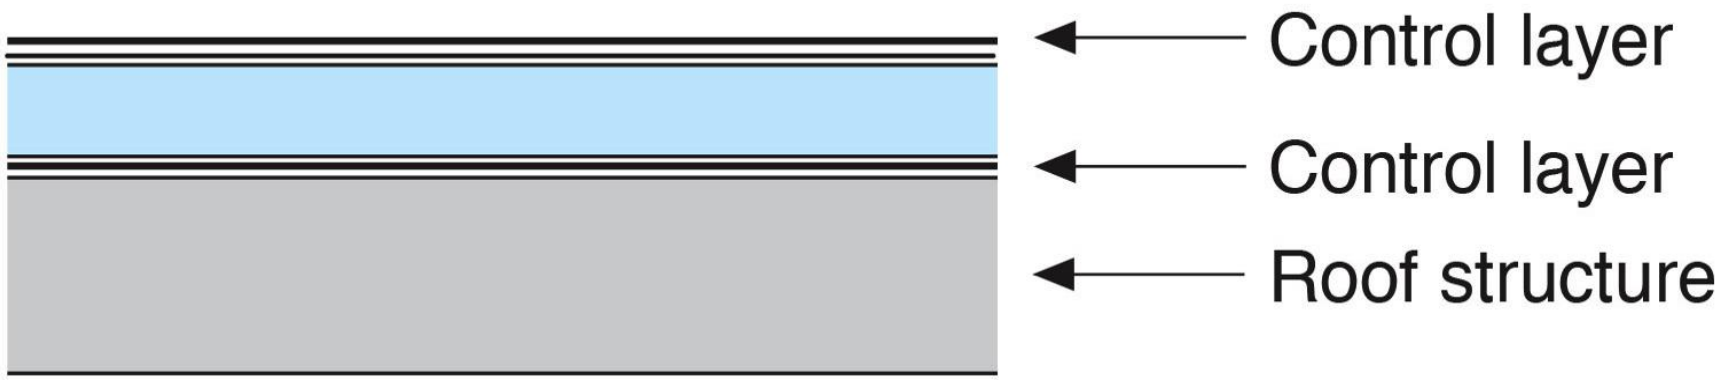
Control layer
Control layer
Roof structure

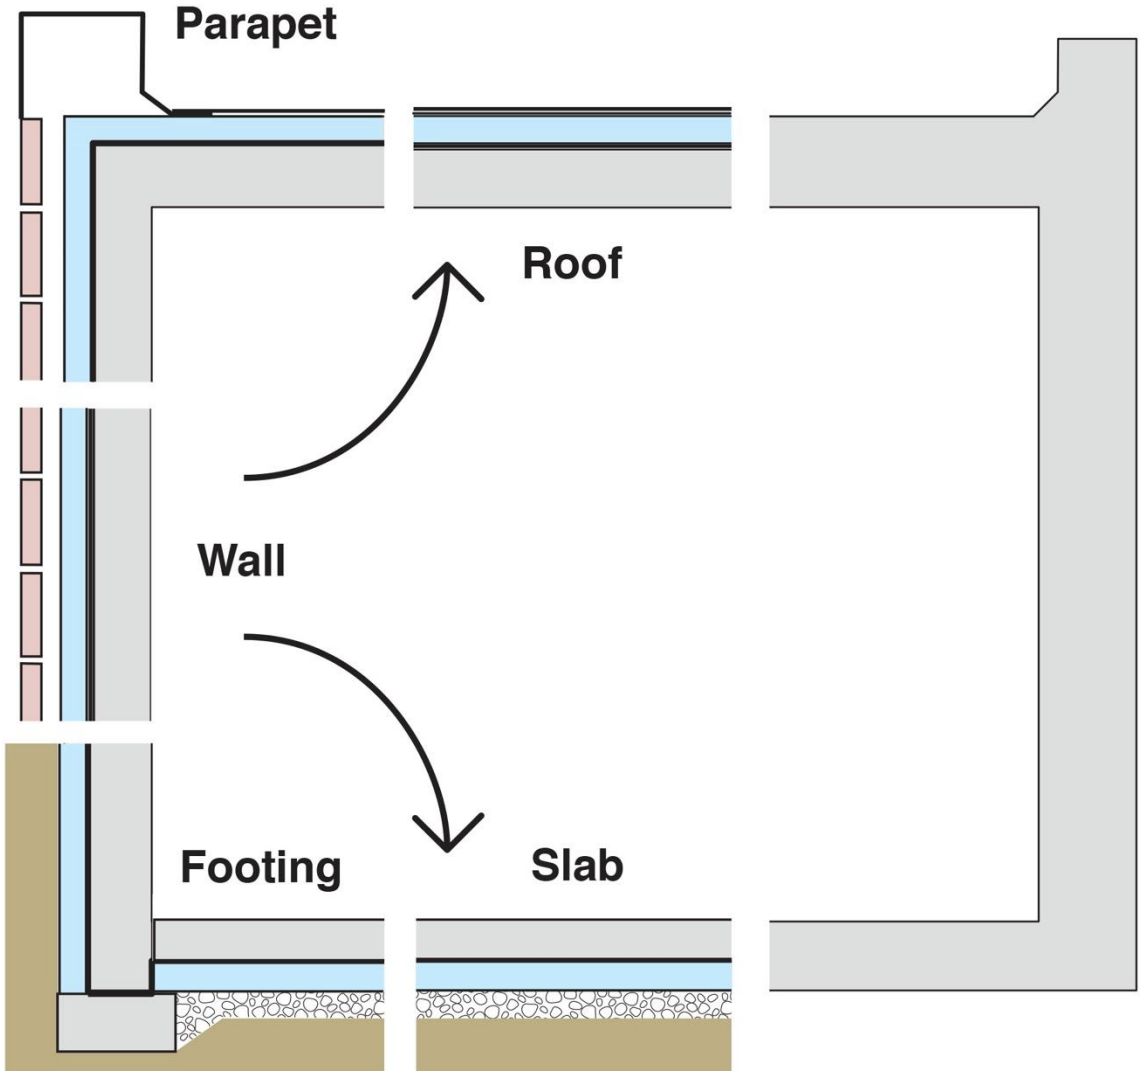
Parapet
Roof
Wall
Footing
Slab

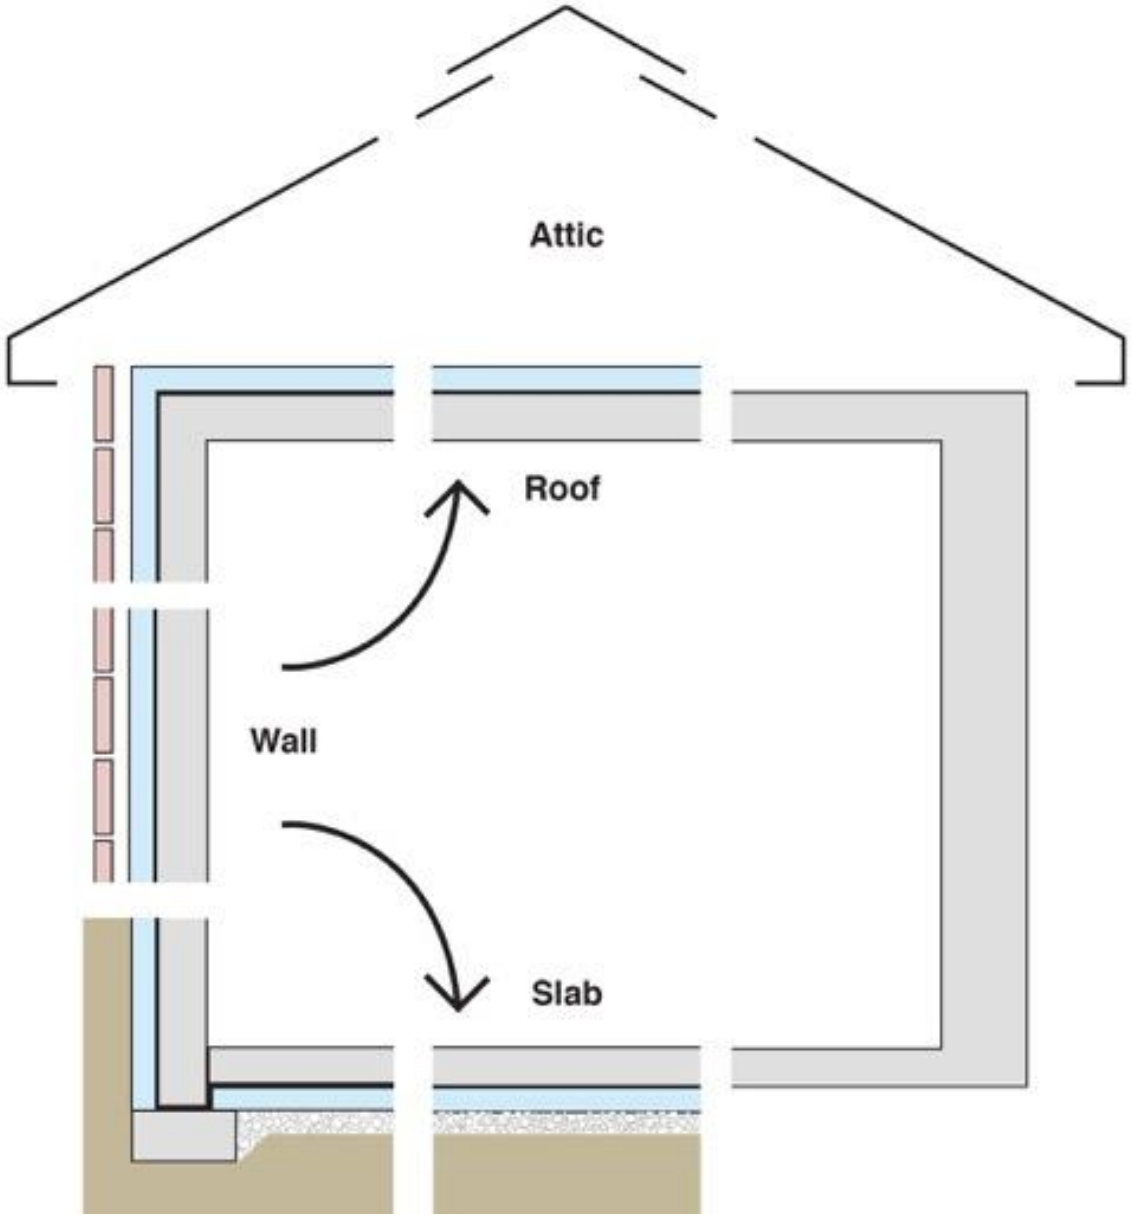
Attic
Roof
Wall
Slab

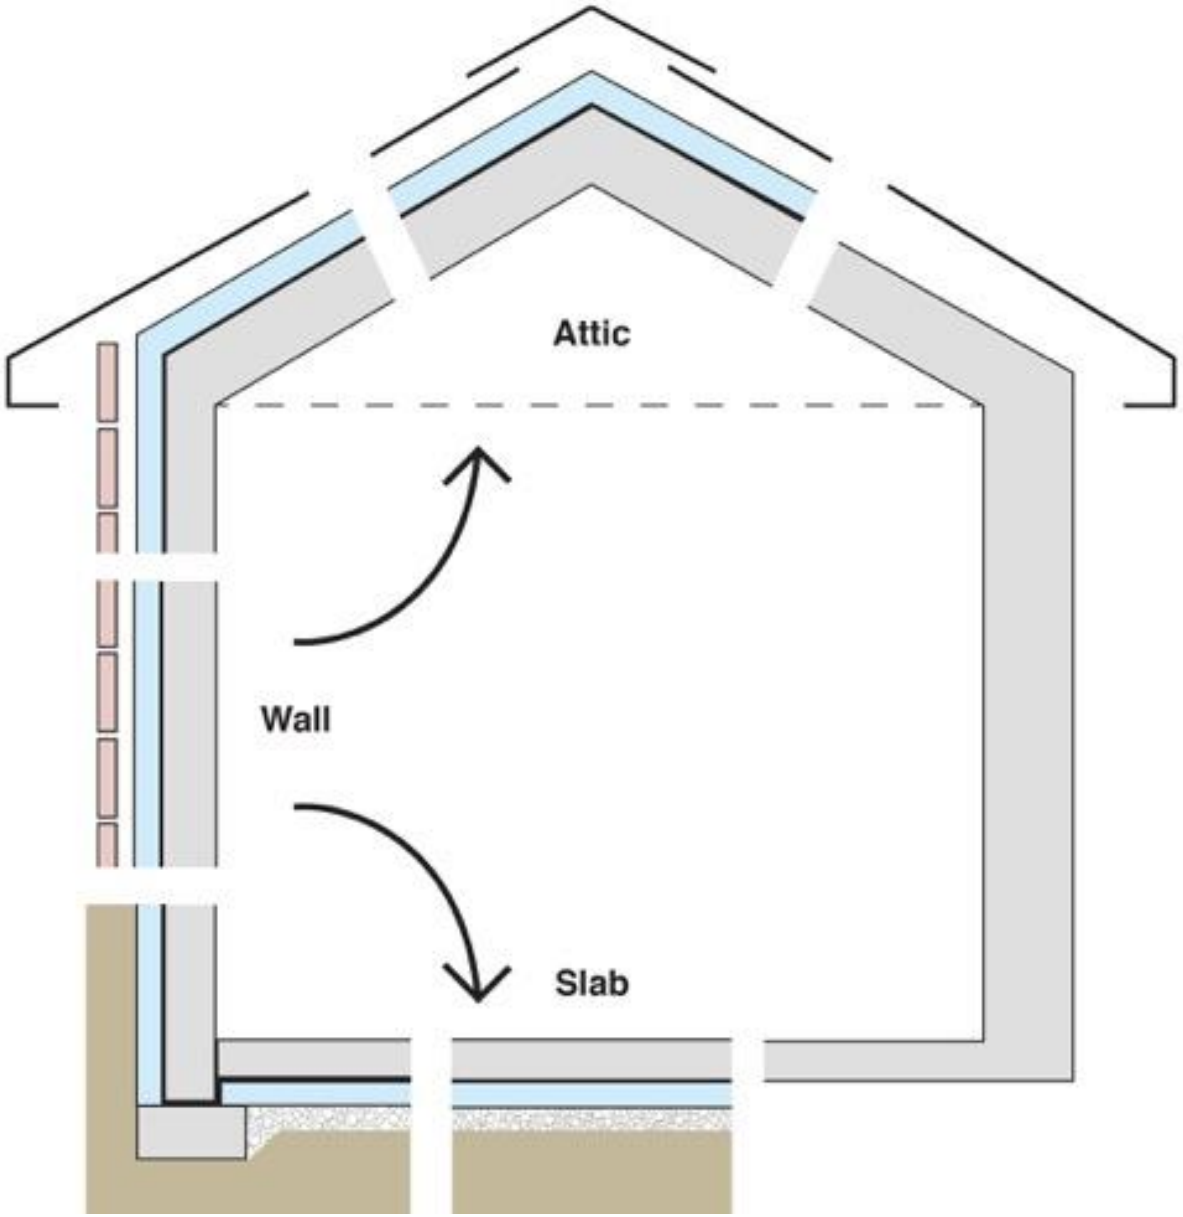
Attic
Wall
Slab

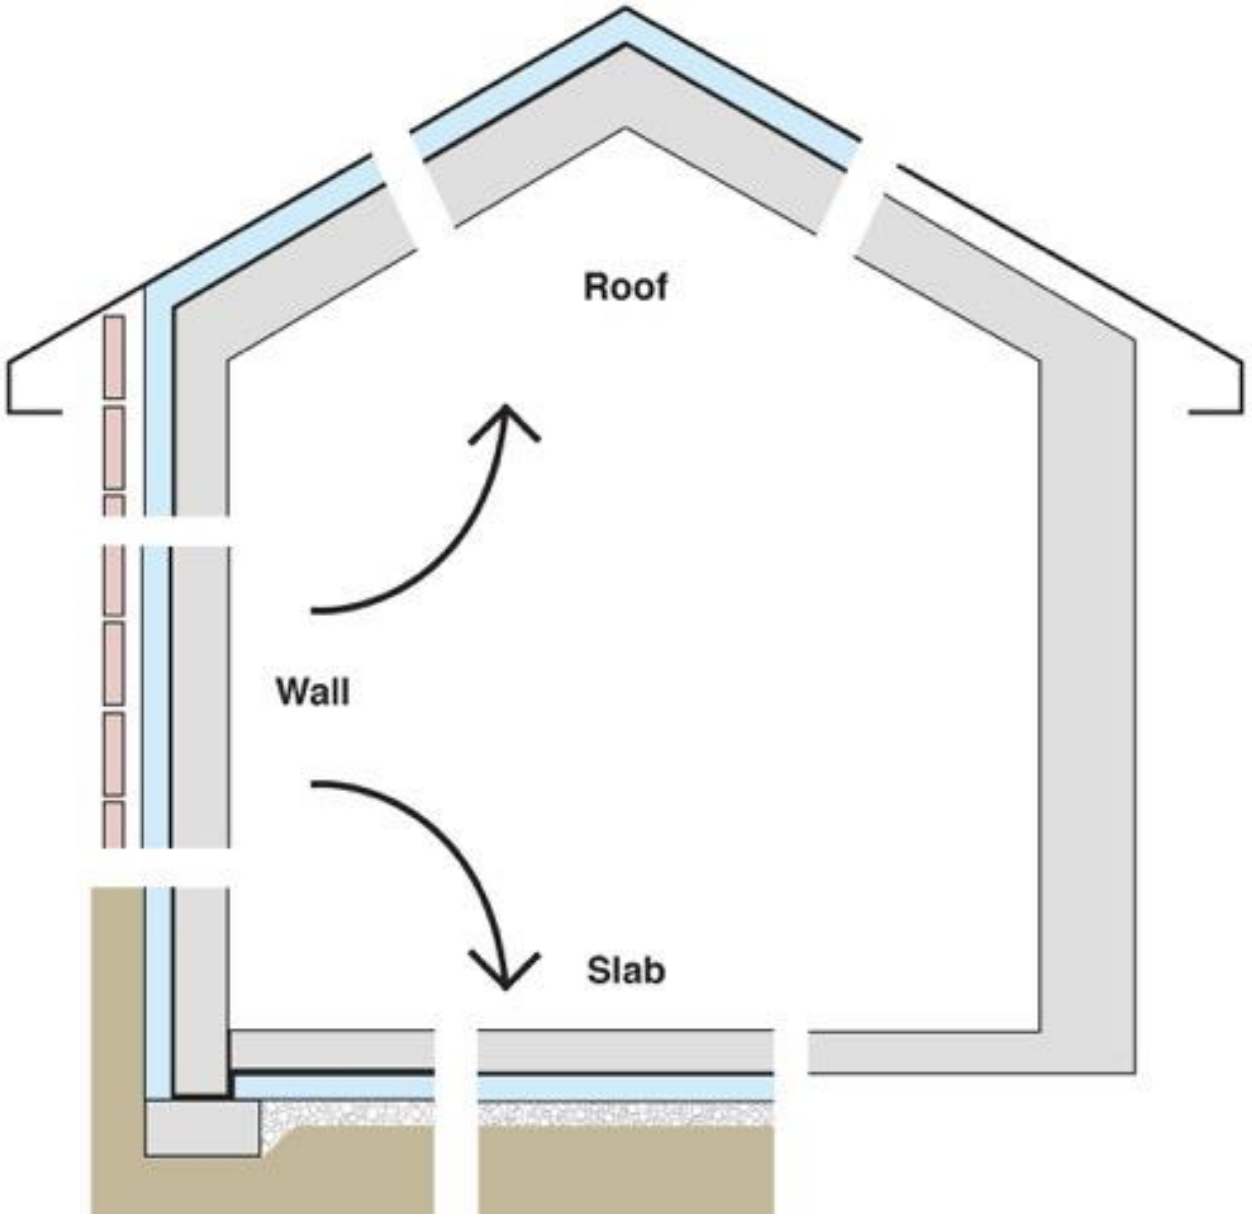
Roof
Wall
Slab

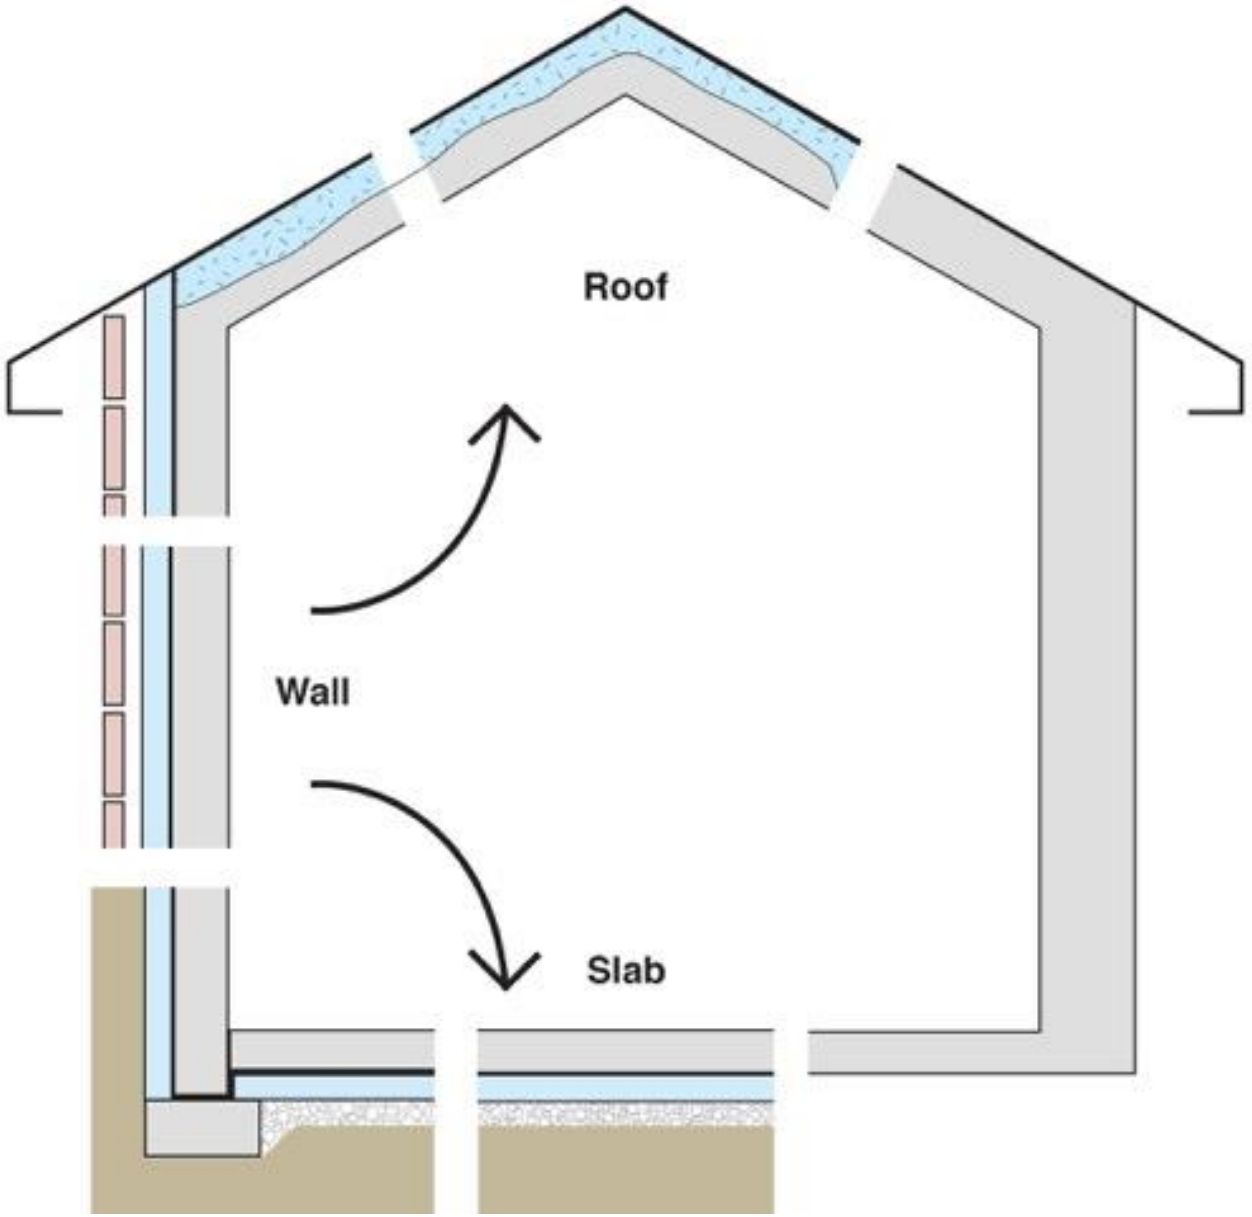
Roof
Wall
Slab

Configurations of the Perfect Wall

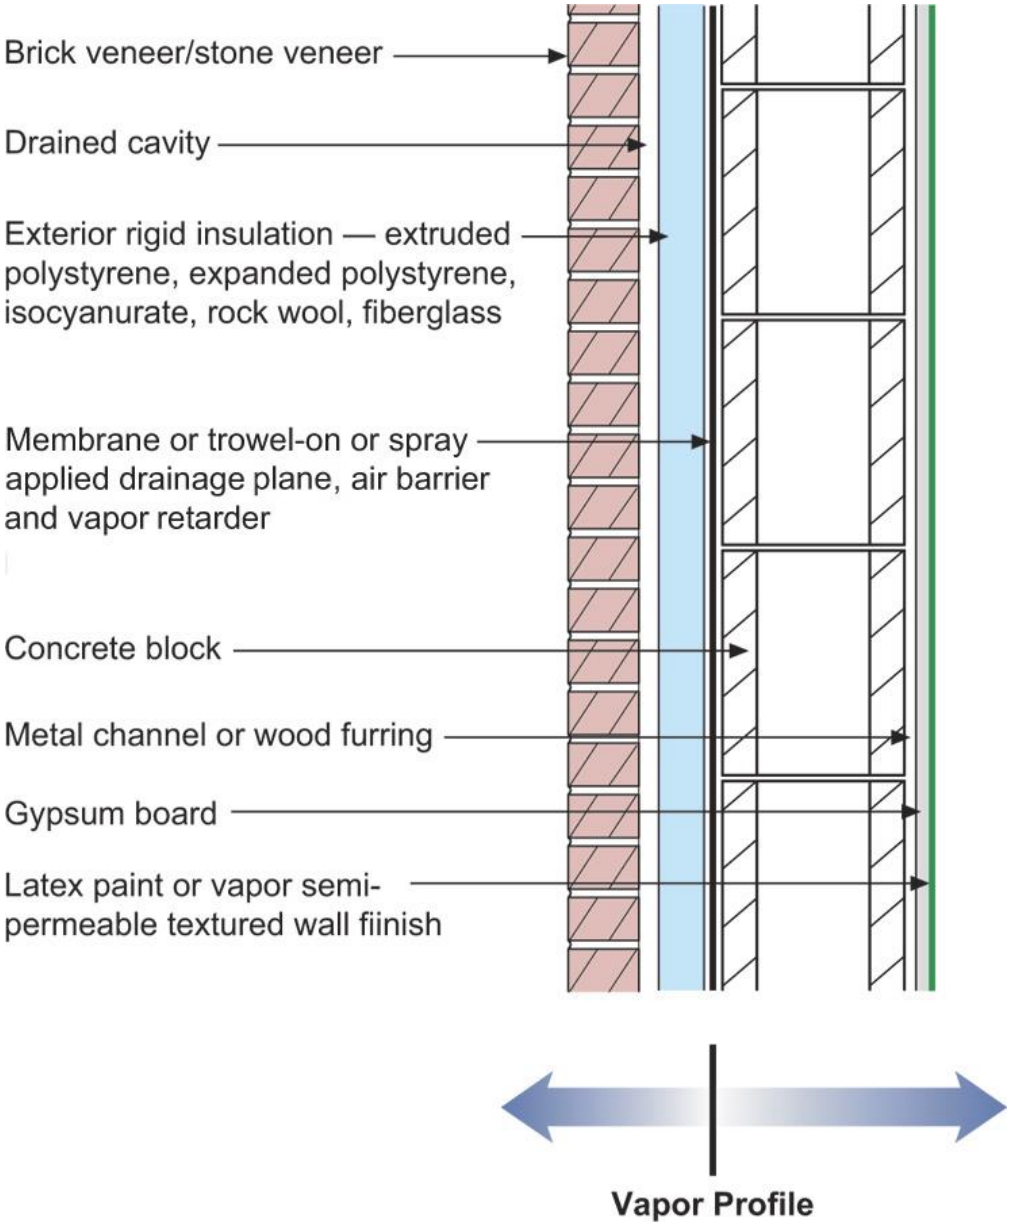
Brick veneer/stone veneer
Drained cavity
Exterior rigid insulation — extruded polystyrene, expanded polystyrene, isocyanurate, rock wool, fiberglass
Membrane or trowel-on or spray applied drainage plane, air barrier and vapor retarder
Concrete block
Metal channel or wood furring
Gypsum board
Latex paint or vapor semi-permeable textured wall fiinish
Vapor Profile

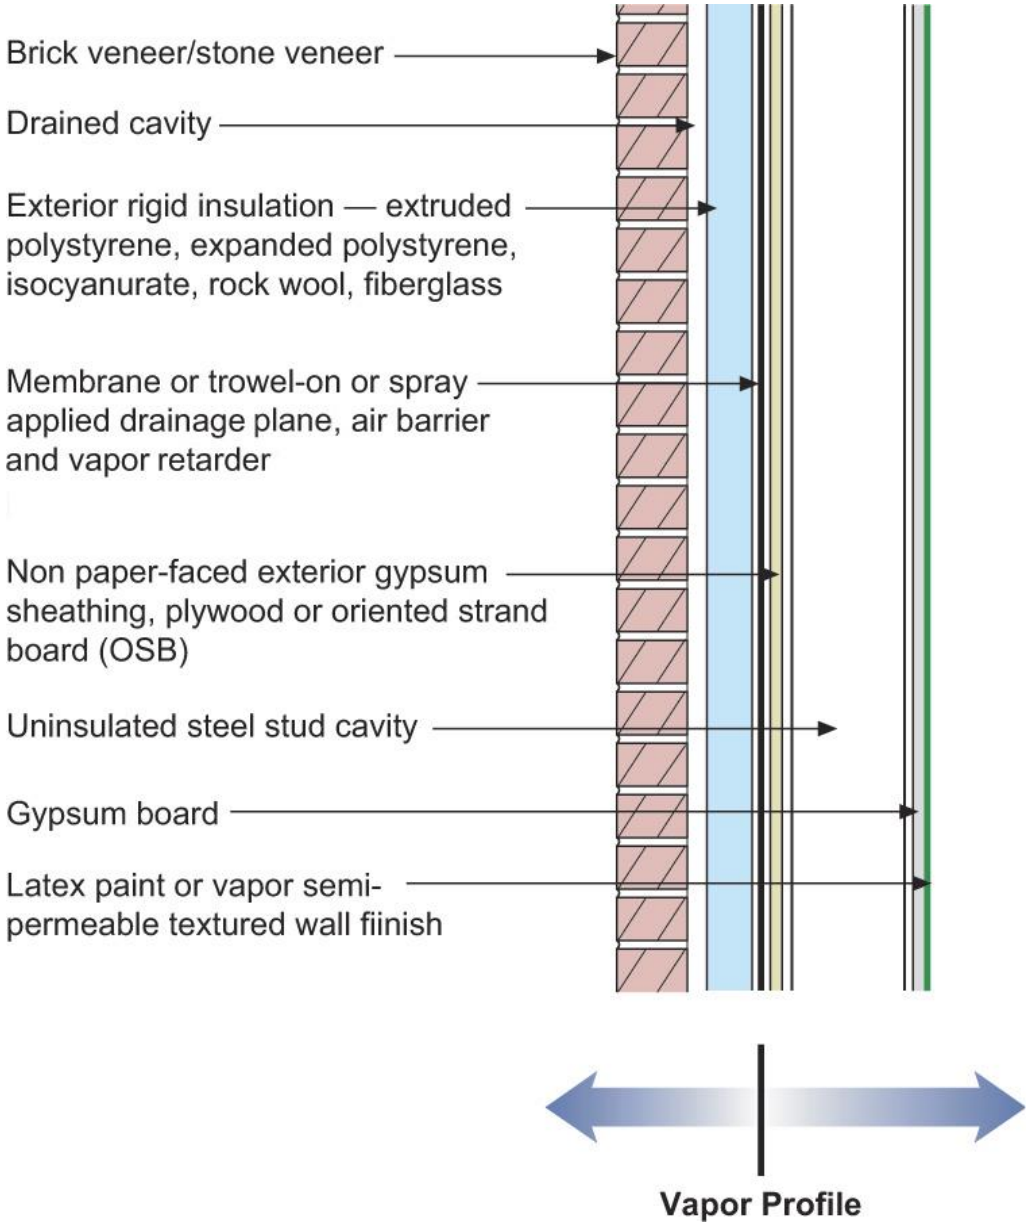
Brick veneer/stone veneer
Drained cavity
Exterior rigid insulation — extruded polystyrene, expanded polystyrene, isocyanurate, rock wool, fiberglass
Membrane or trowel-on or spray applied drainage plane, air barrier and vapor retarder
Non paper-faced exterior gypsum sheathing, plywood or oriented strand board (OSB)
Uninsulated steel stud cavity
Gypsum board
Latex paint or vapor semi-permeable textured wall fiinish
Vapor Profile

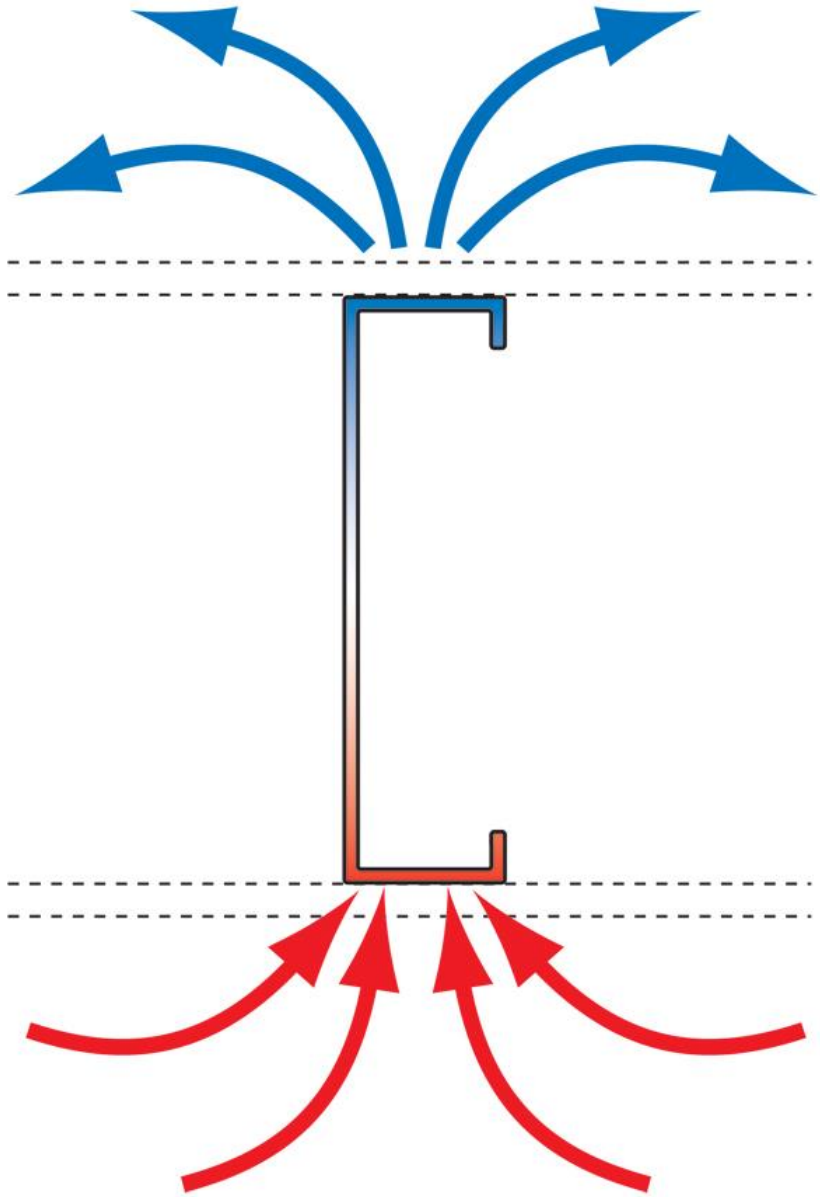

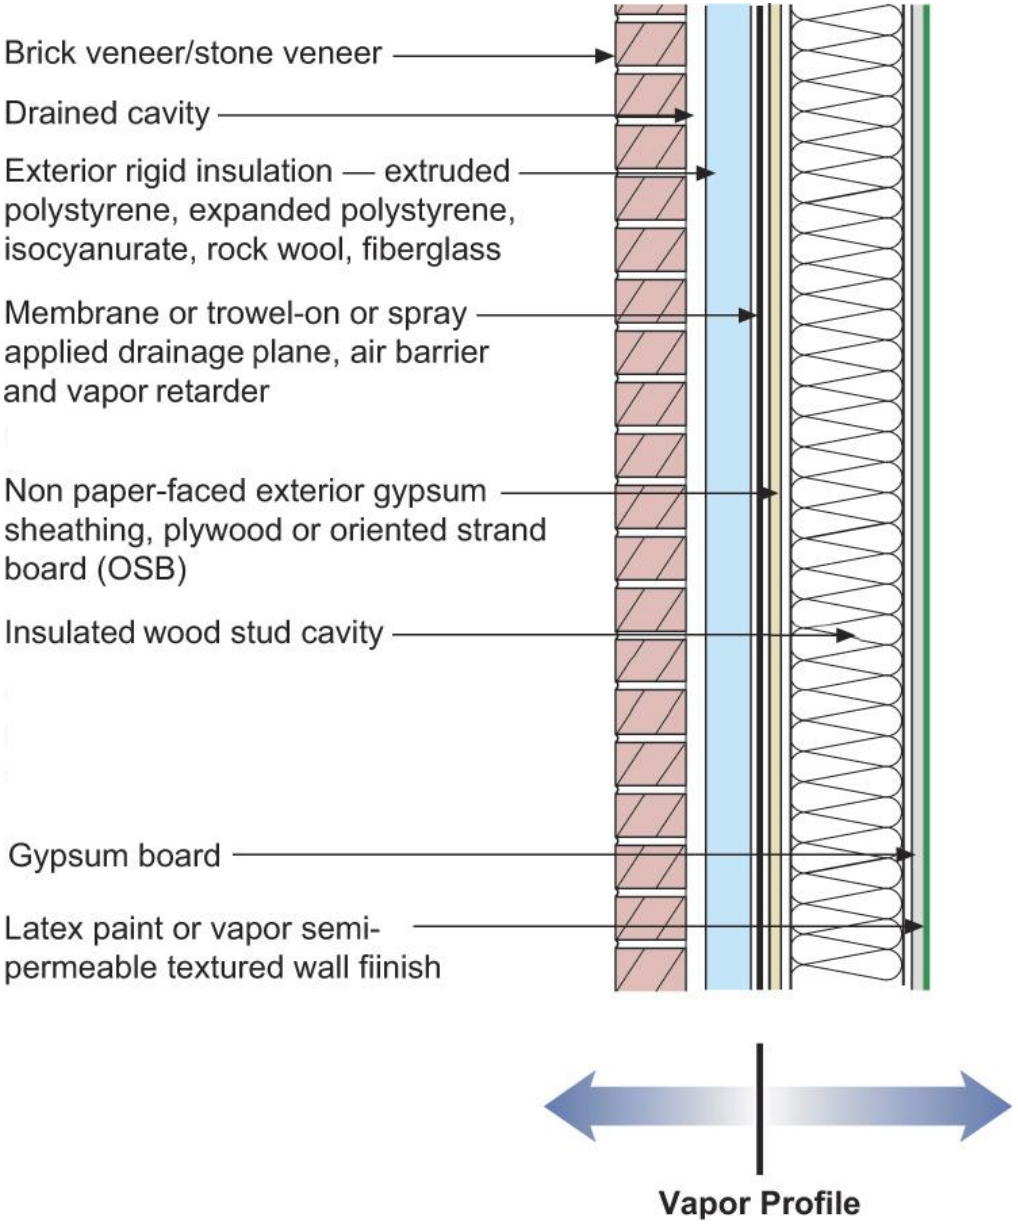
Brick veneer/stone veneer
Drained cavity
Exterior rigid insulation — extruded polystyrene, expanded polystyrene, isocyanurate, rock wool, fiberglass
Membrane or trowel-on or spray applied drainage plane, air barrier and vapor retarder
Non paper-faced exterior gypsum sheathing, plywood or oriented strand board (OSB)
Insulated wood stud cavity
Gypsum board
Latex paint or vapor semi-permeable textured wall fiinish
Vapor Profile

The Water Molecule

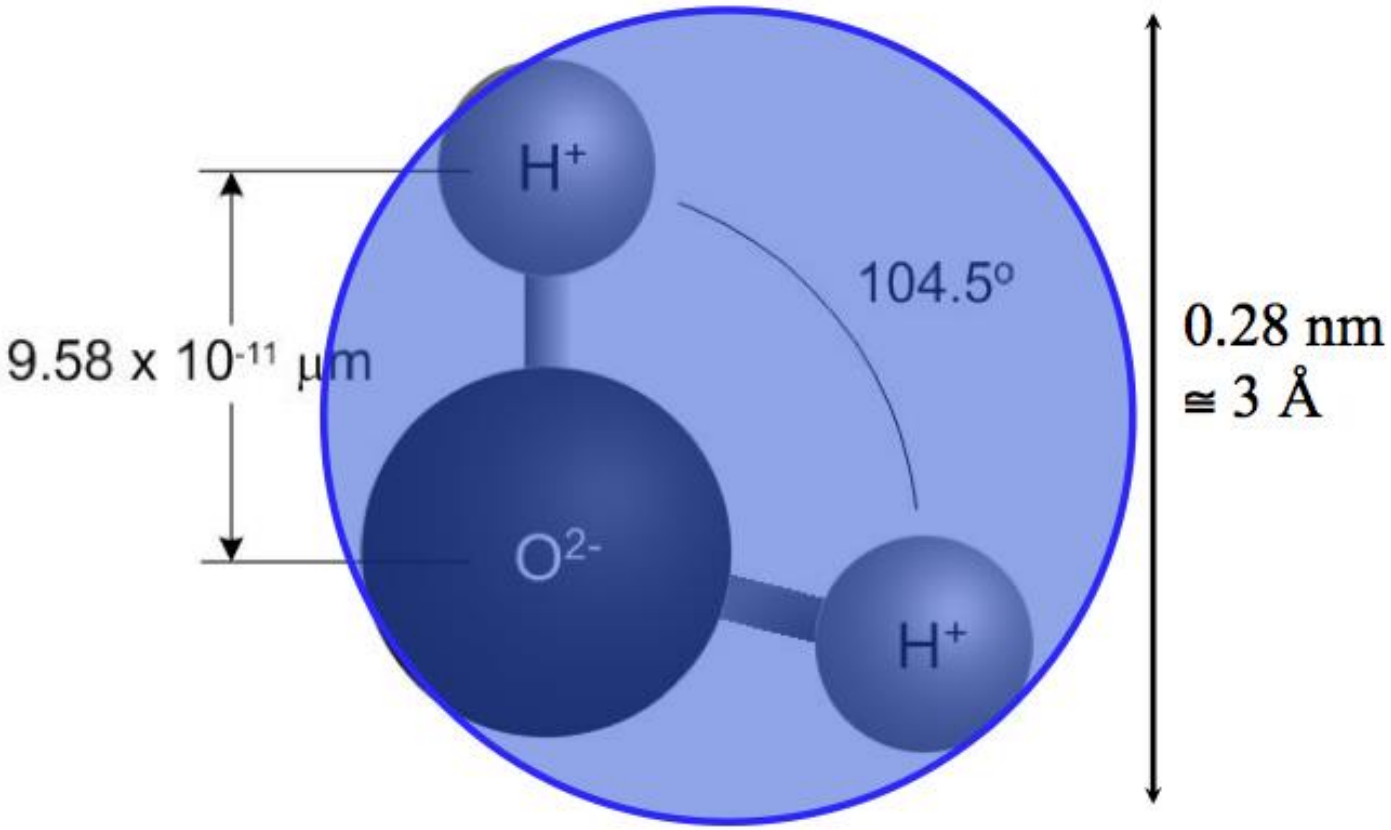
H+
104.5°
9.58 x 10-11 µm
0.28 nm
≅ 3 Å
O2-
H+

Polar Molecule

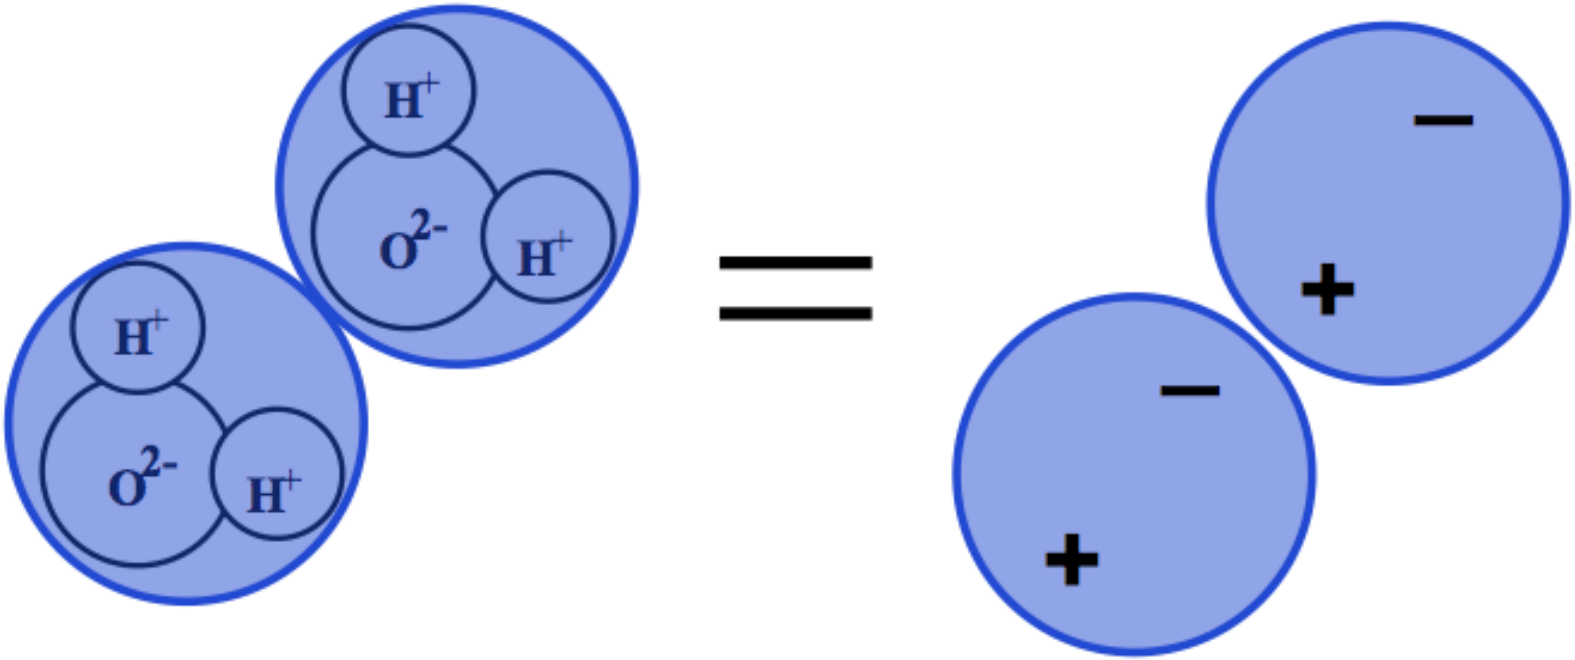
H+
O2-
H+
H+
O2-
H+
=
−
+
−
+

Size Matters

Vapor

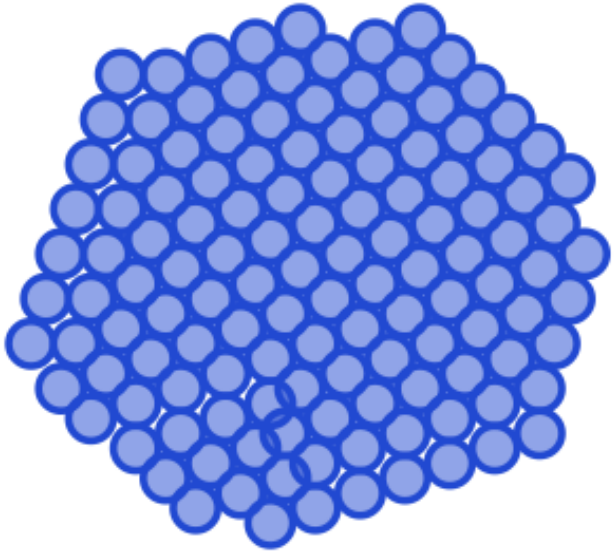

Liquid

Phases of Water

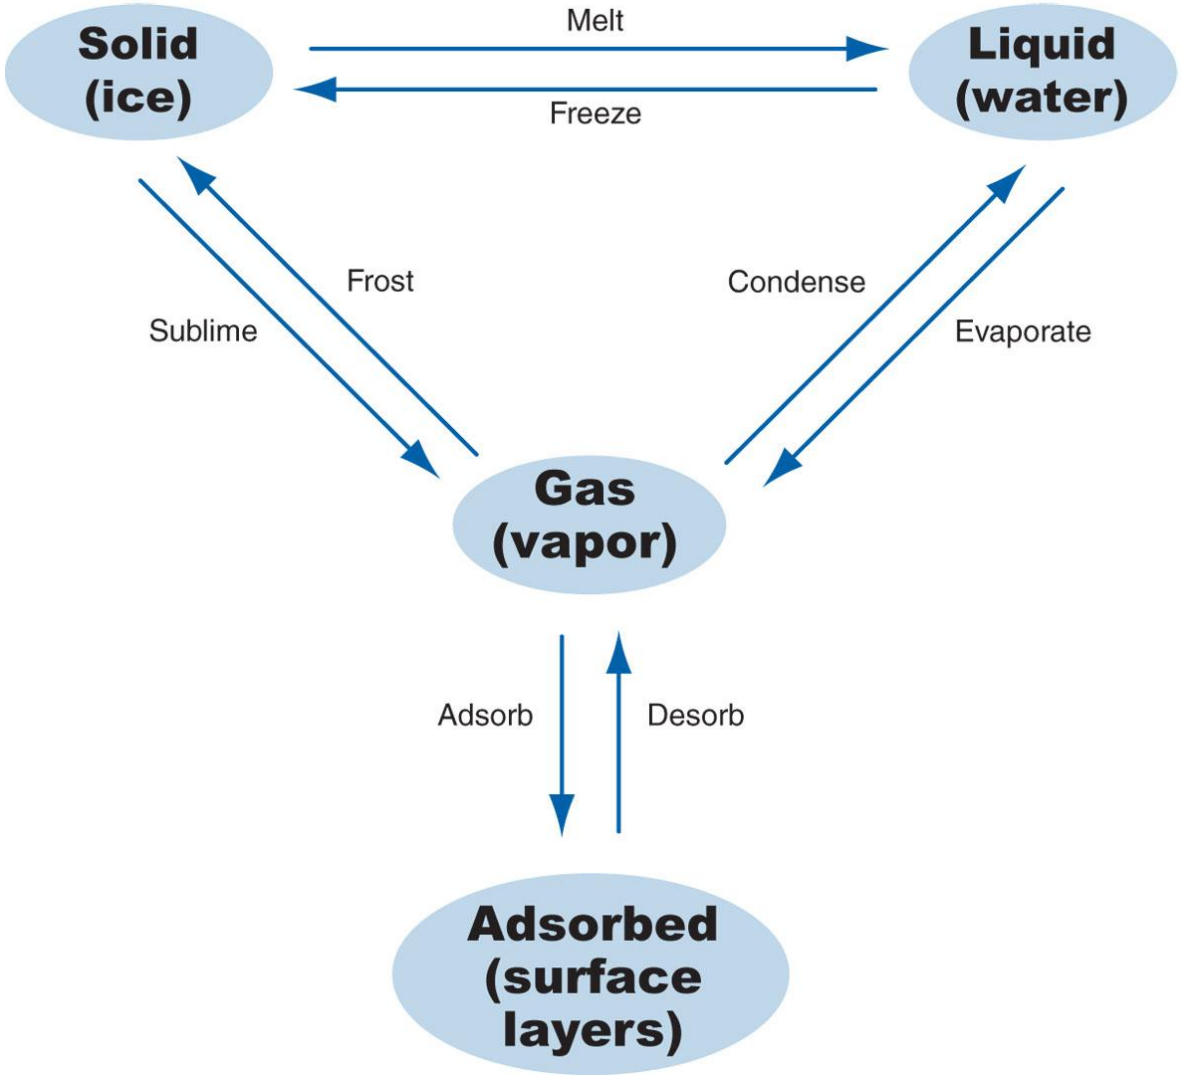
Solid (ice)
Melt
Freeze
Liquid (water)
Frost
Sublime
Condense
Evaporate
Gas (vapor)
Adsorb
Desorb
Adsorbed (surface layers)

Relative Humidity

Vapor Pressure

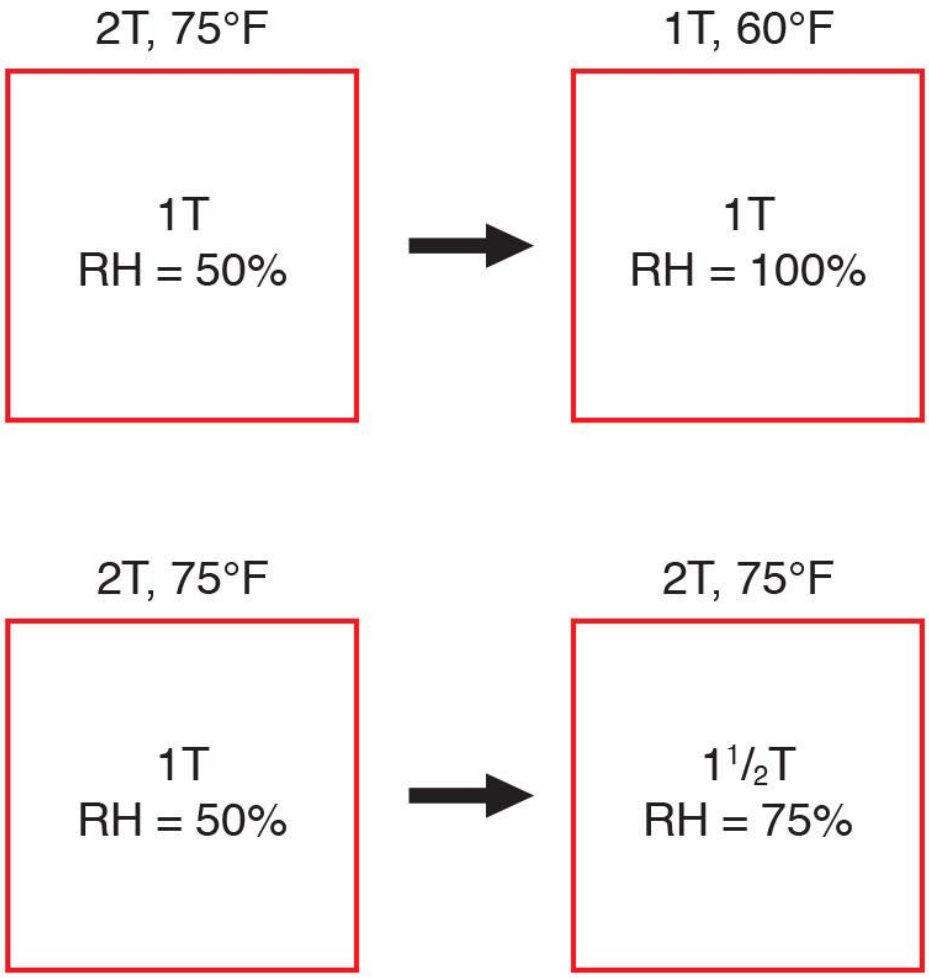
2T, 75°F
1T
RH = 50%
1T, 60°F
1T
RH = 100%
2T, 75°F
1T
RH = 50%
2T, 75°F
1 1/2T
RH = 75%

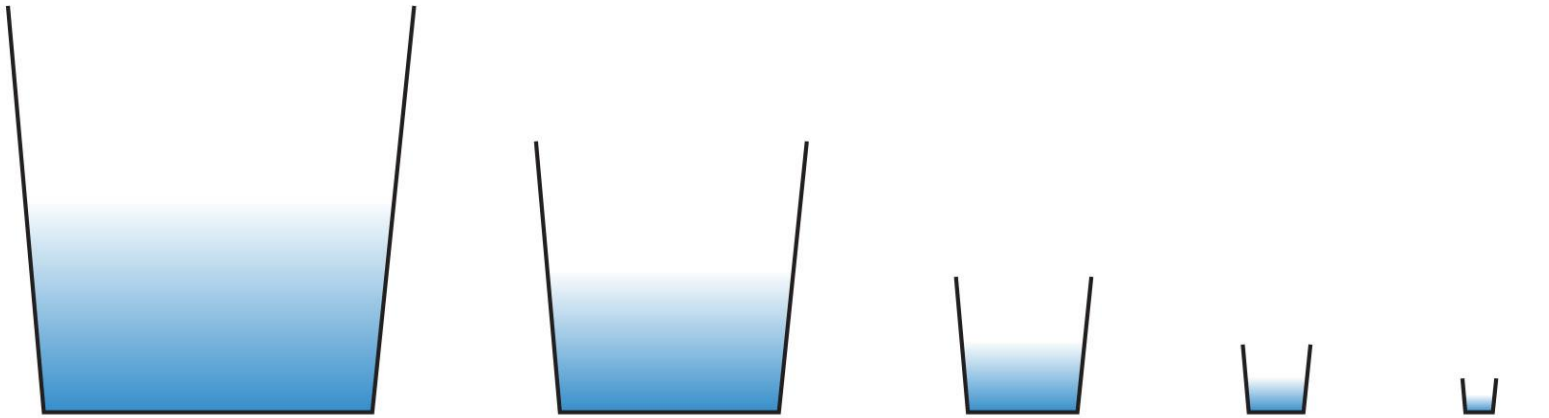
90°F
50% RH
75°F
50% RH
60°F
50% RH
45°F
50% RH
30°F
50% RH

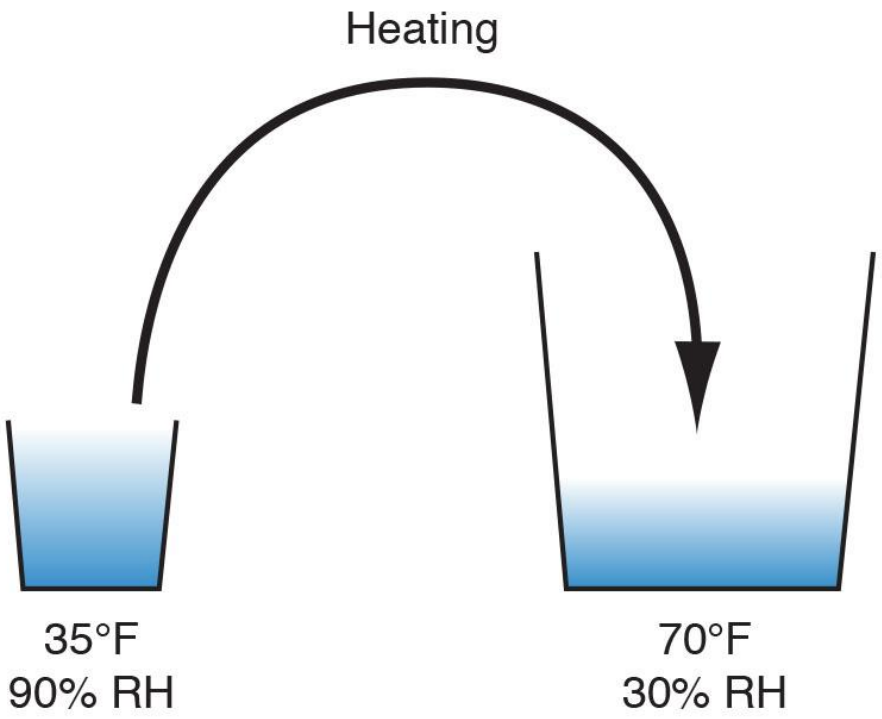
Heating
35°F
90% RH
70°F
30% RH

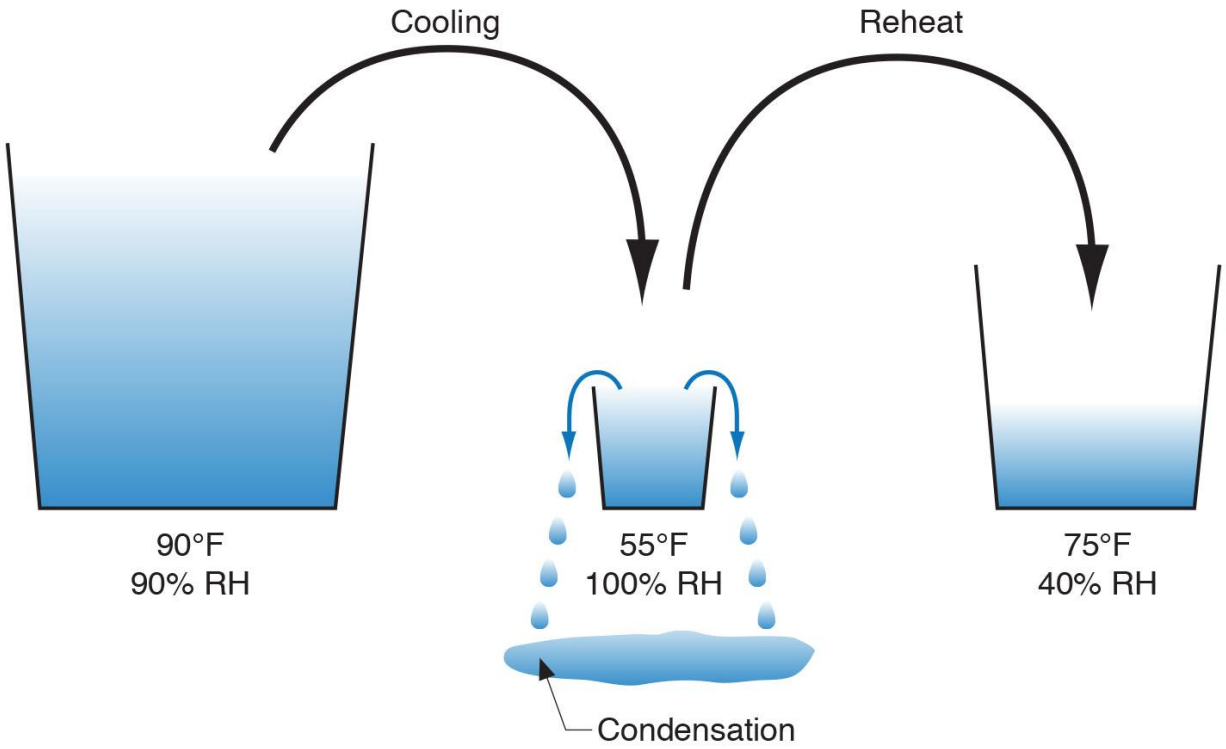
Cooling
Reheat
90°F
90% RH
55°F
100% RH
75°F
40% RH
Condensation

Sorption

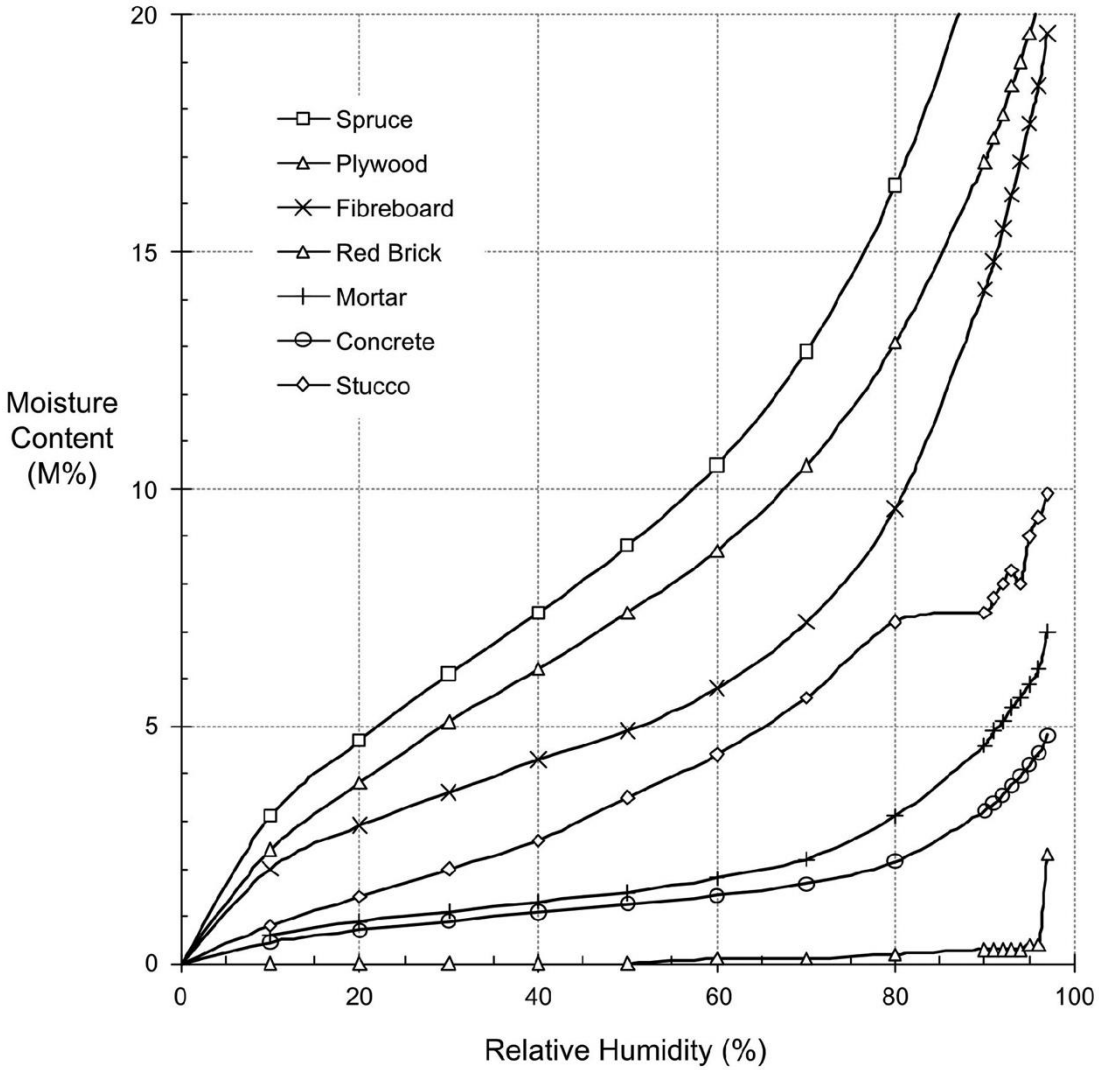

Sorption isotherm for several building materials [Kumaran 2002]
From Straube & Burnett, 2005

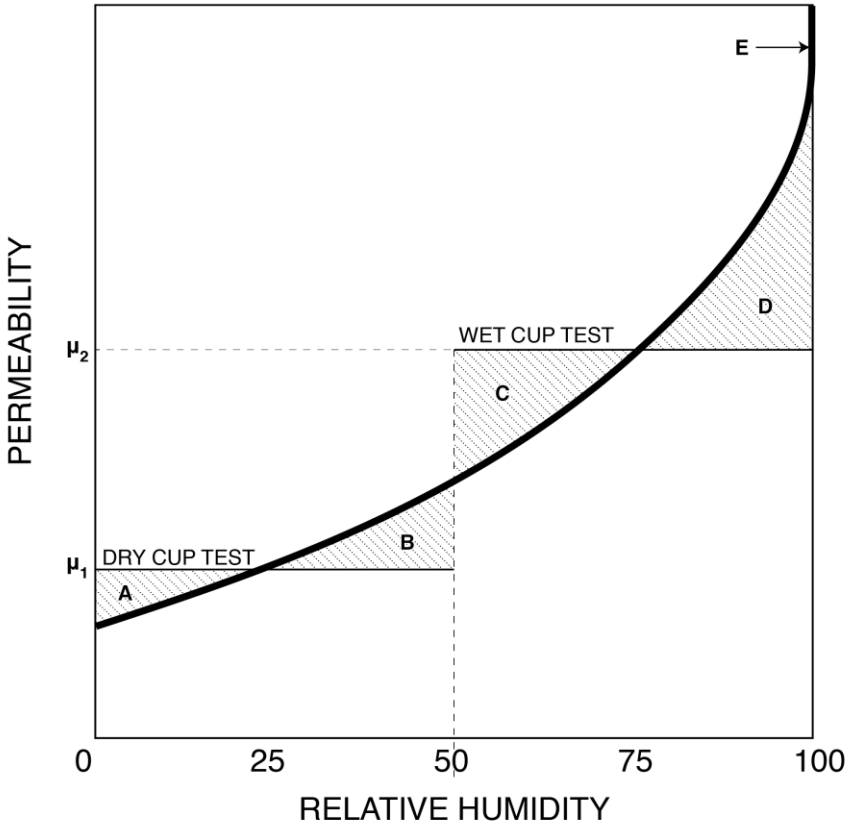

A - Single-layer of absorbed molecules
B - Multiple layers of absorbed molecules
C - Interconnected layers (internal capillary condensation)
D - Free water in pores, capillary suction
E - Supersaturated regime

Relationship between Dry Cup and Wet Cup
Adapted from Joy & Wilson, 1963


R-11 3½
OWENS-CORNING
Fiberglas
Building
Insulation
FIBERGLAS
ASSURED THERMAL
PERFORMANCE
WARNING: The FACING on this insulation will BURN AND SHOULD NOT BE LEFT EXPOSED. Special care should be taken when working close to the facing.
R-11 3½
OWENS-CORNING
Fiberglas
Building
Insulation
FIBERGLAS
ASSURED THERMAL
PERFORMANCE
R-11 3½
OWENS-CORNING
Fiberglas
Building
Insulation
FIBERGLAS
ASSURED THERMAL
PERFORMANCE
R-11 3½
OWENS-CORNING
Fiberglas
Building
Insulation
FIBERGLAS
ASSURED THERMAL
PERFORMANCE
R-11 3½
OWENS-CORNING
Fiberglas
Building
Insulation
FIBERGLAS
ASSURED THERMAL
PERFORMANCE

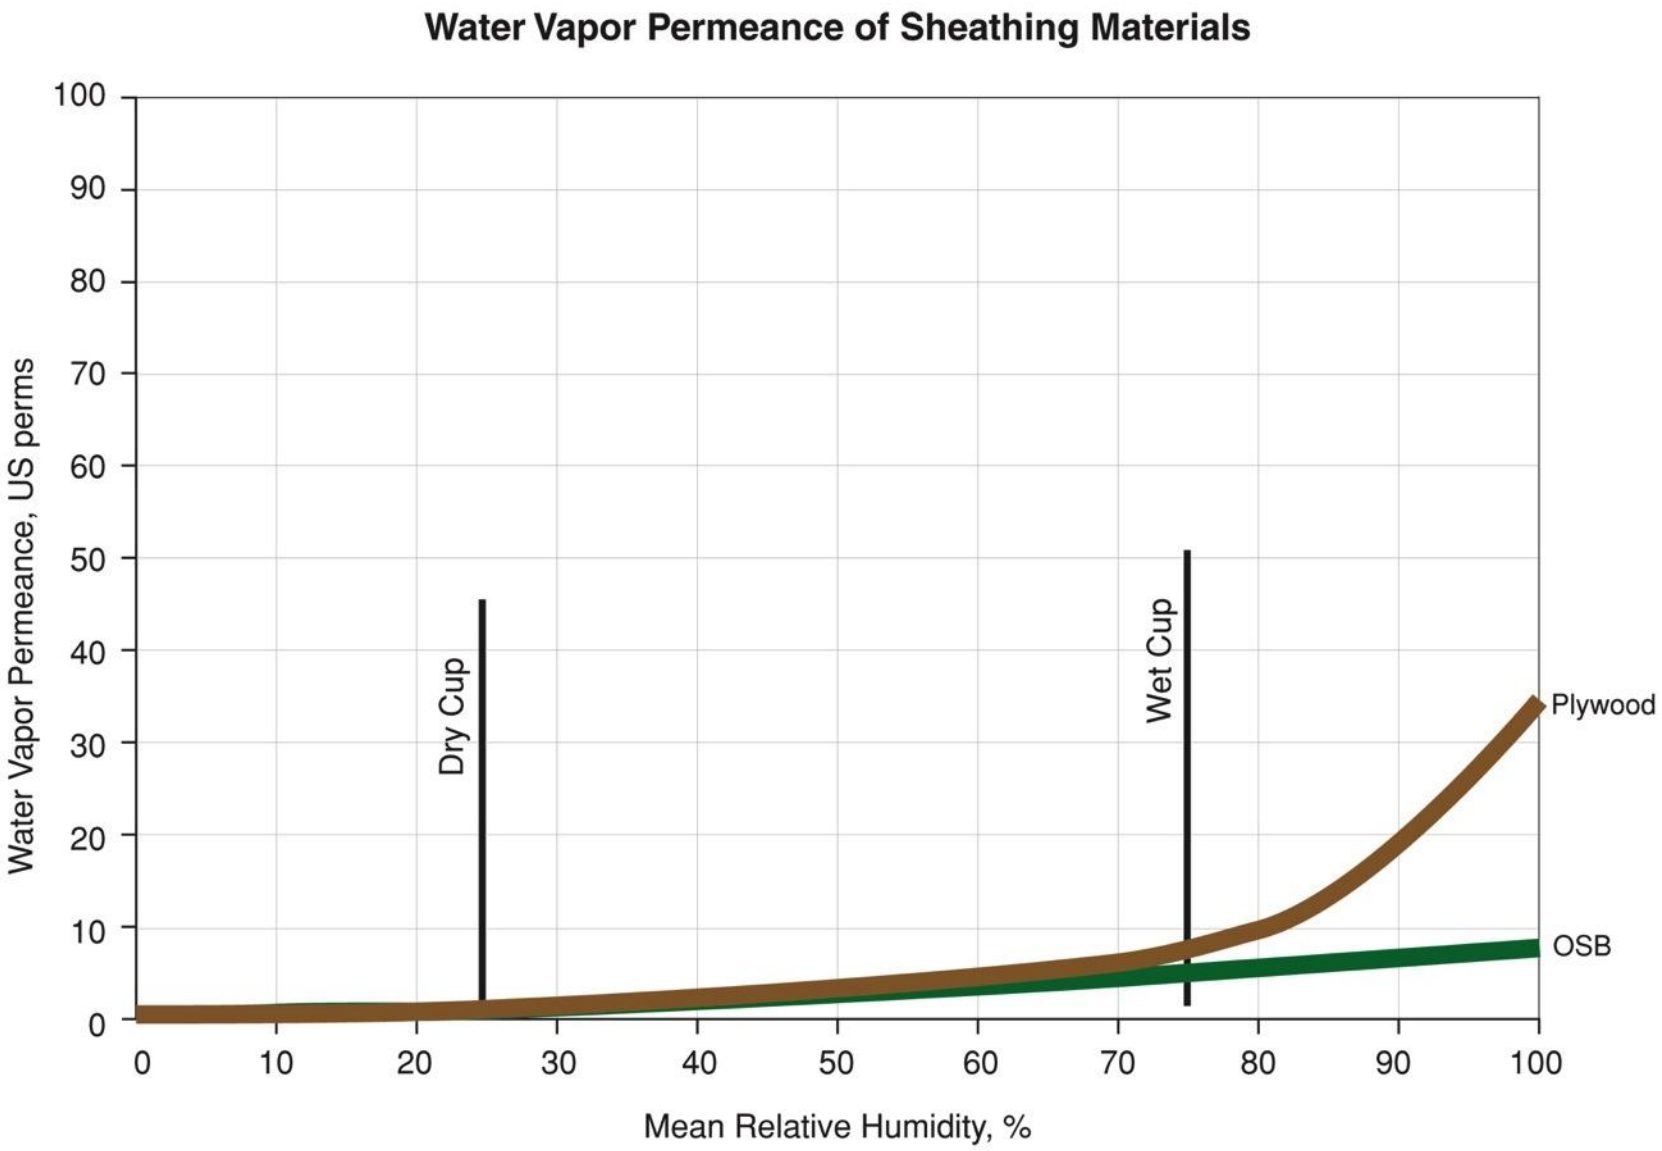
Water Vapor Permeance of Sheathing Materials
Water Vapor Permeance, US perms
100
90
80
70
60
50
40
30
20
10
0
Dry Cup
Wet Cup
Plywood
OSB
0
10
20
30
40
50
60
70
80
90
100
Mean Relative Humidity, %

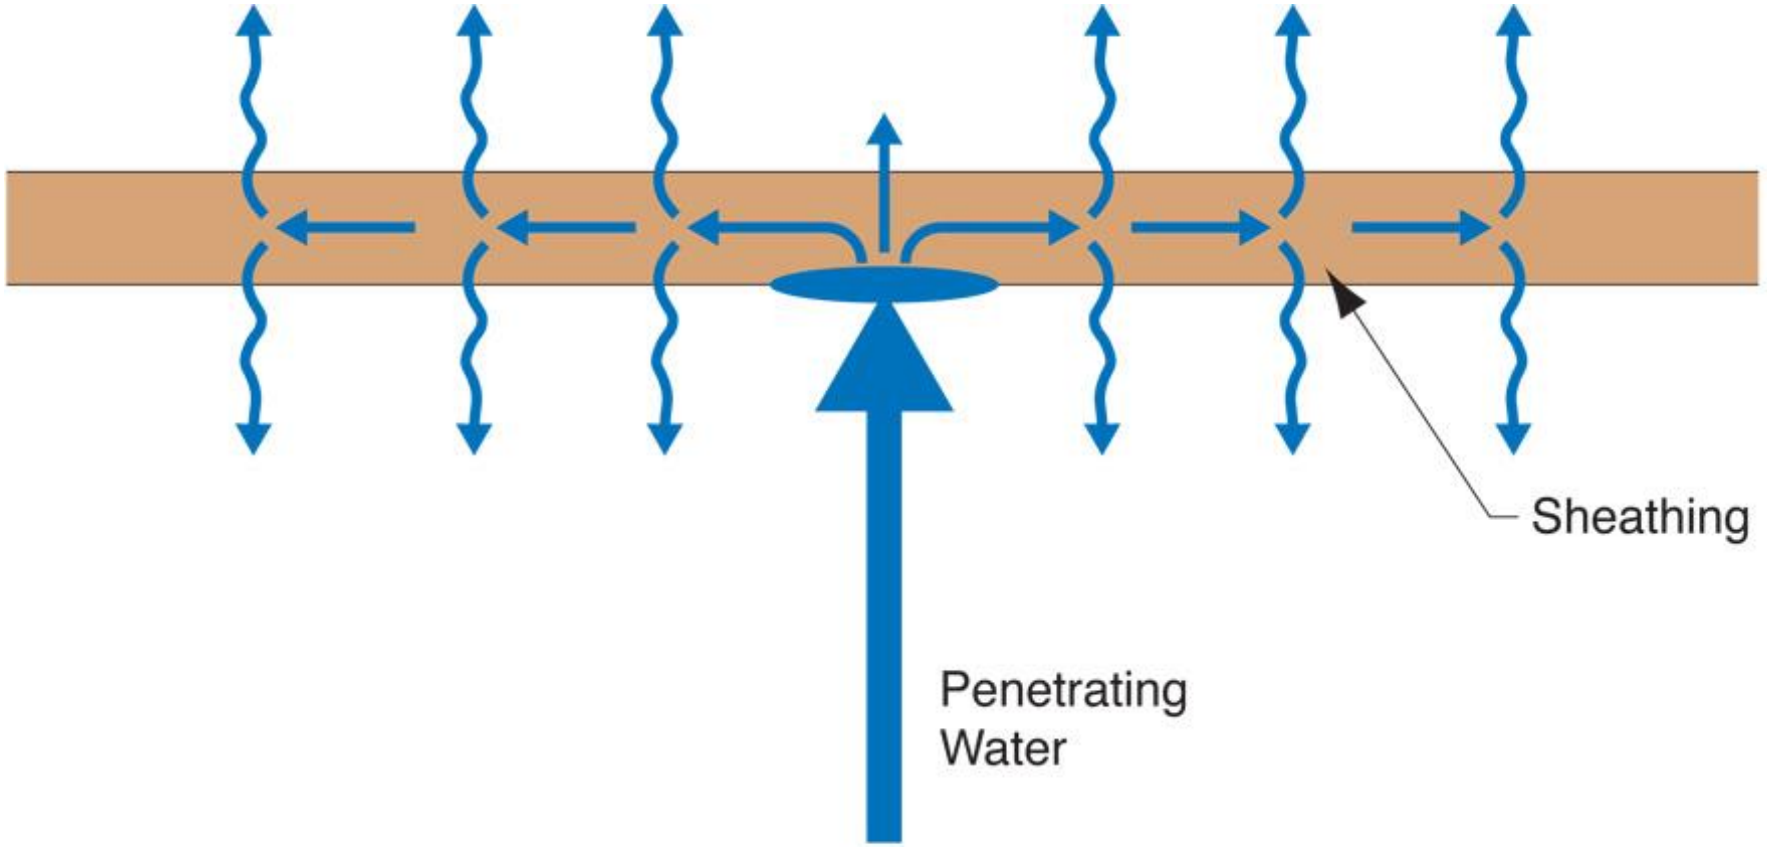
Sheathing
Penetrating
Water

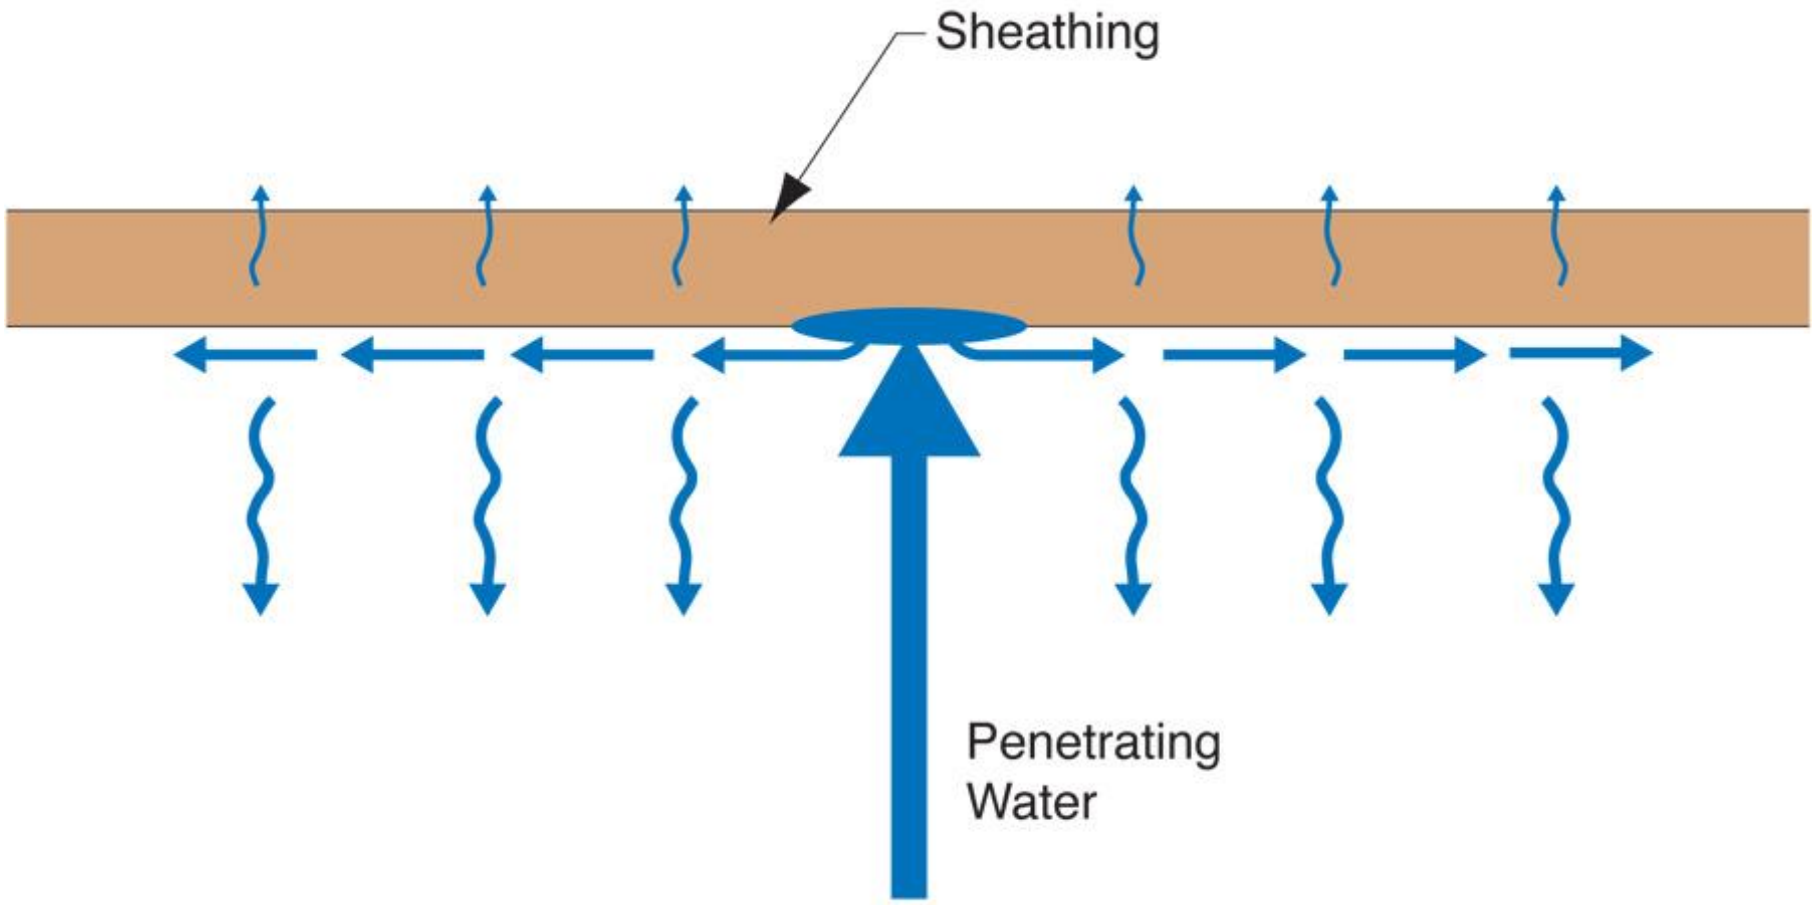
Sheathing
Penetrating
Water

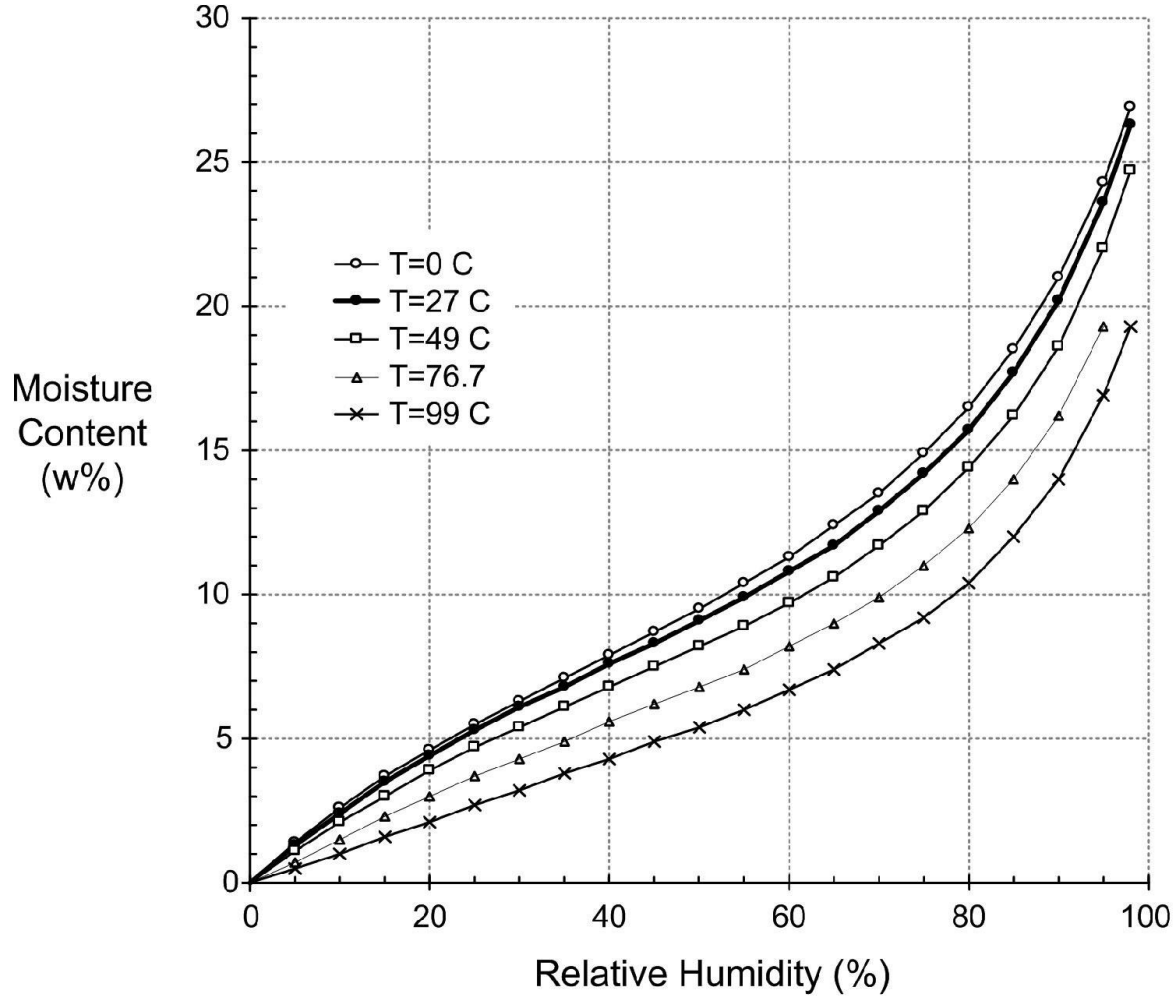

Average sorption isotherm for wood as a function of temperature
From Straube & Burnett, 2005

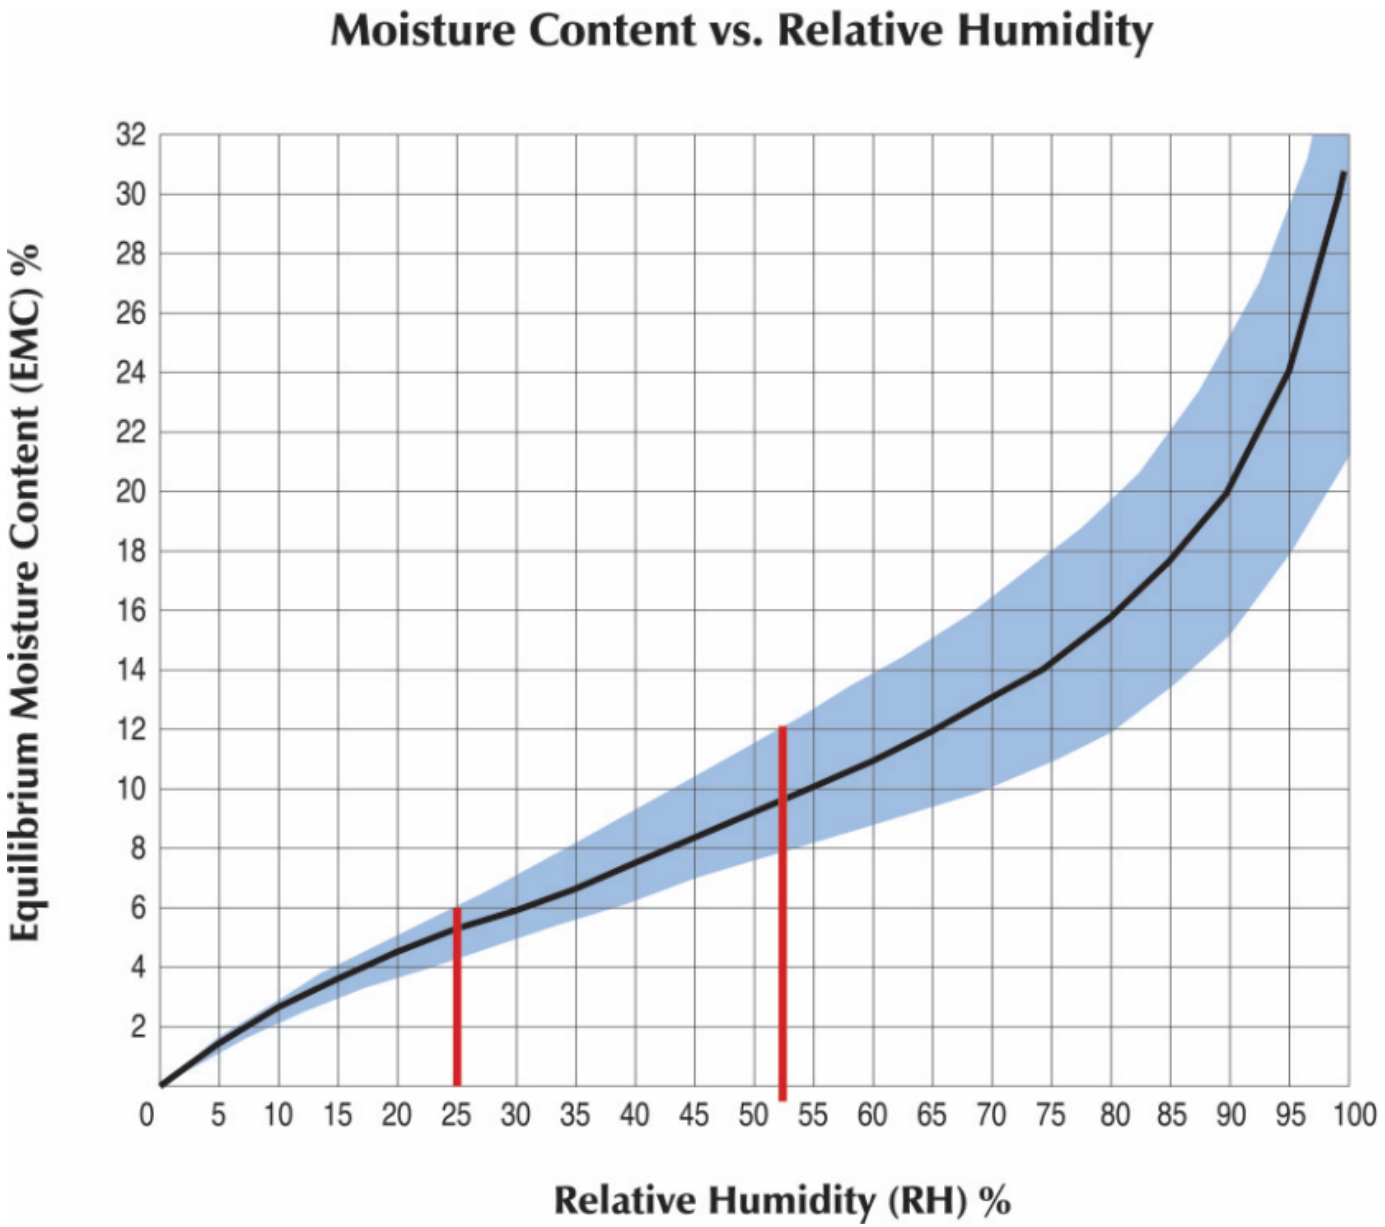
Moisture Content vs. Relative Humidity
Equilibrium Moisture Content (EMC) %
32
30
28
26
24
22
20
18
16
14
12
10
8
6
4
2
0
5
10
15
20
25
30
35
40
45
50
55
60
65
70
75
80
85
90
95
100
Relative Humidity (RH) %

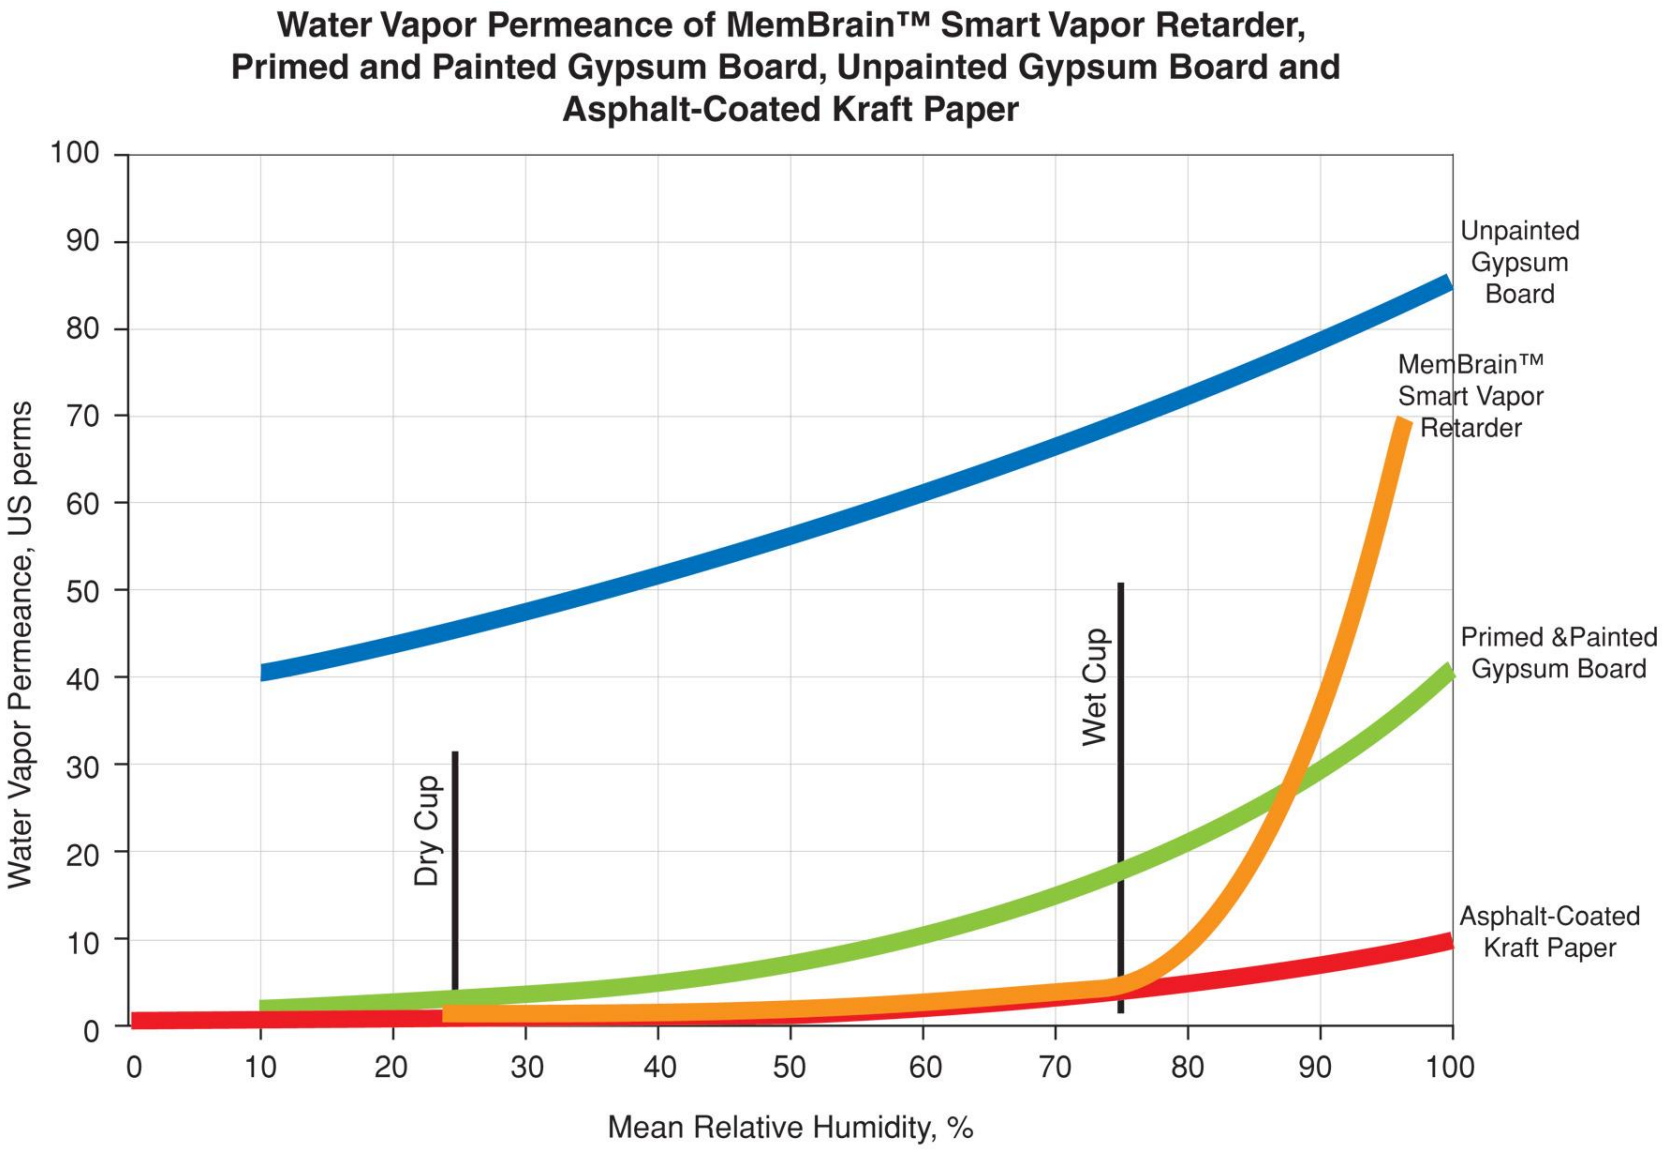
Water Vapor Permeance of MemBrain™ Smart Vapor Retarder, Primed and Painted Gypsum Board, Unpainted Gypsum Board and Asphalt-Coated Kraft Paper
Water Vapor Permeance, US perms
Mean Relative Humidity, %
0
10
20
30
40
50
60
70
80
90
100
Dry Cup
Wet Cup
Unpainted Gypsum Board
MemBrain™ Smart Vapor Retarder
Primed &Painted Gypsum Board
Asphalt-Coated Kraft Paper

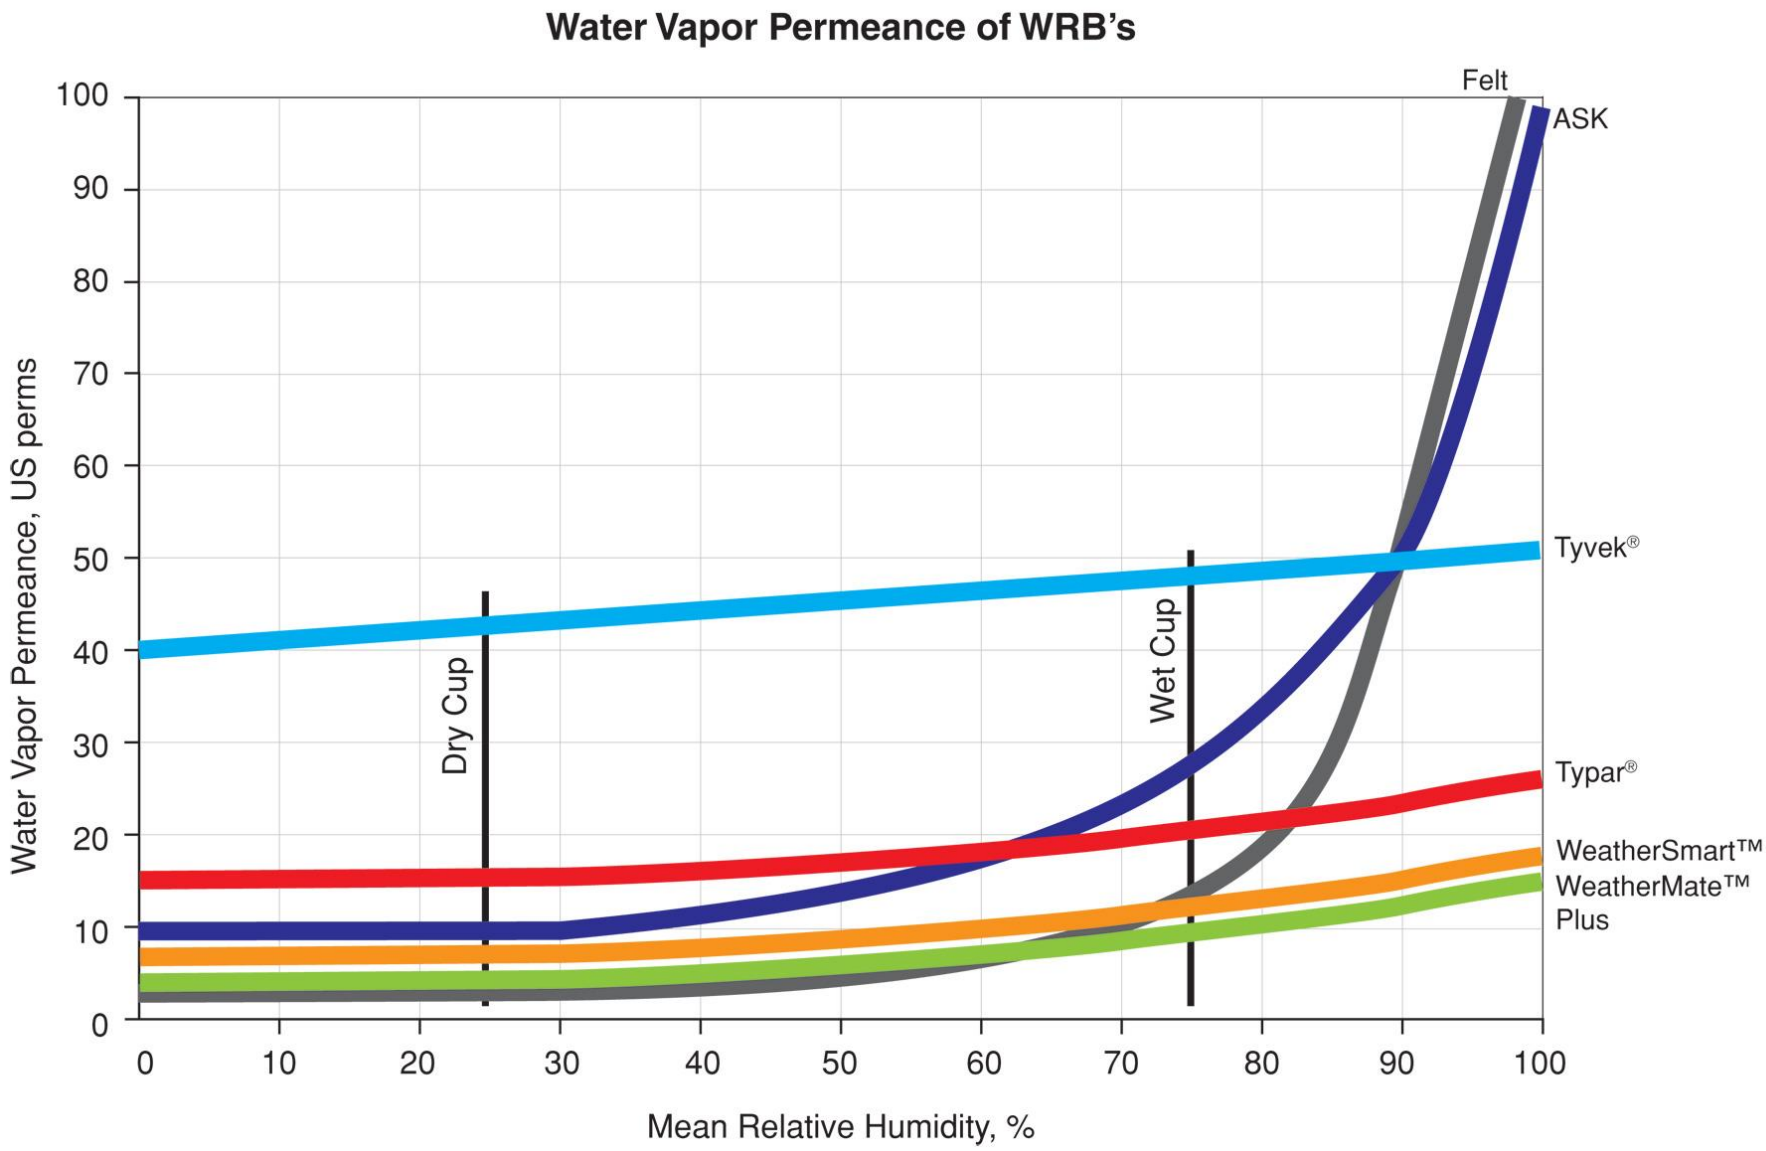
Water Vapor Permeance of WRB's
Water Vapor Permeance, US perms
Mean Relative Humidity, %
0
10
20
30
40
50
60
70
80
90
100
Dry Cup
Wet Cup
Felt
ASK
Tyvek®
Typar®
WeatherSmart™
WeatherMate™
Plus

Air Flow and Vapor Diffusion

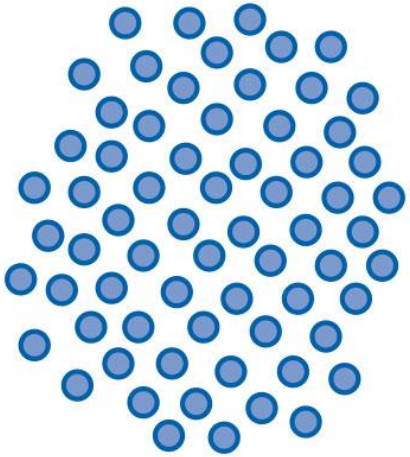

DIFFUSION



Higher Dewpoint Temperature
Higher Water Vapor Density
or Concentration
(Higher Vapor Pressure)
on Warm Side of Assembly

Low Dewpoint Temperature
Lower Water Vapor Density
or Concentration
(Lower Vapor Pressure)
on Cold Side of Assembly

AIR TRANSPORT

Higher Air Pressure

Lower Air Pressure

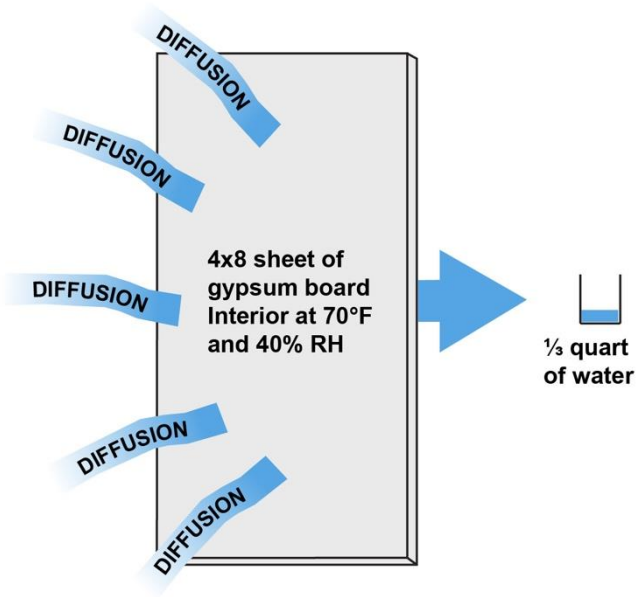
DIFFUSION
DIFFUSION
DIFFUSION
DIFFUSION
DIFFUSION
4x8 sheet of gypsum board Interior at 70°F and 40% RH
⅓ quart of water

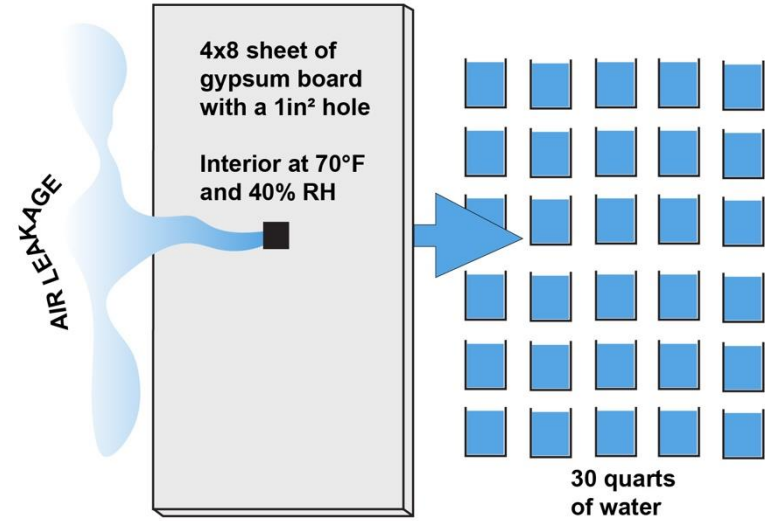
AIR LEAKAGE
4x8 sheet of gypsum board with a 1in² hole
Interior at 70°F and 40% RH
30 quarts of water

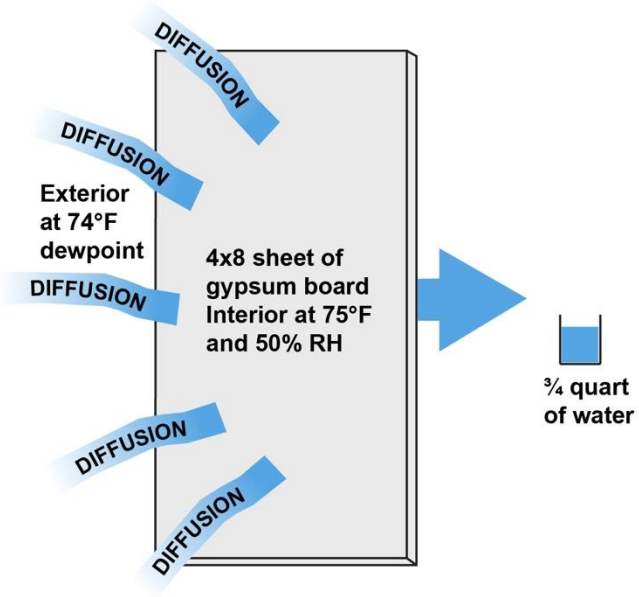
DIFFUSION
DIFFUSION
Exterior
at 74°F
dewpoint
DIFFUSION
4x8 sheet of
gypsum board
Interior at 75°F
and 50% RH
DIFFUSION
DIFFUSION
¾ quart
of water

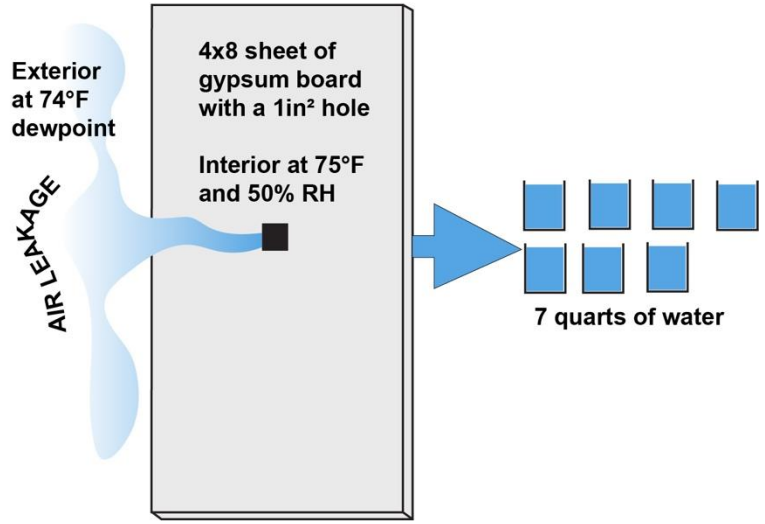
Exterior
at 74°F
dewpoint
AIR LEAKAGE
4x8 sheet of
gypsum board
with a 1in² hole
Interior at 75°F
and 50% RH
7 quarts of water

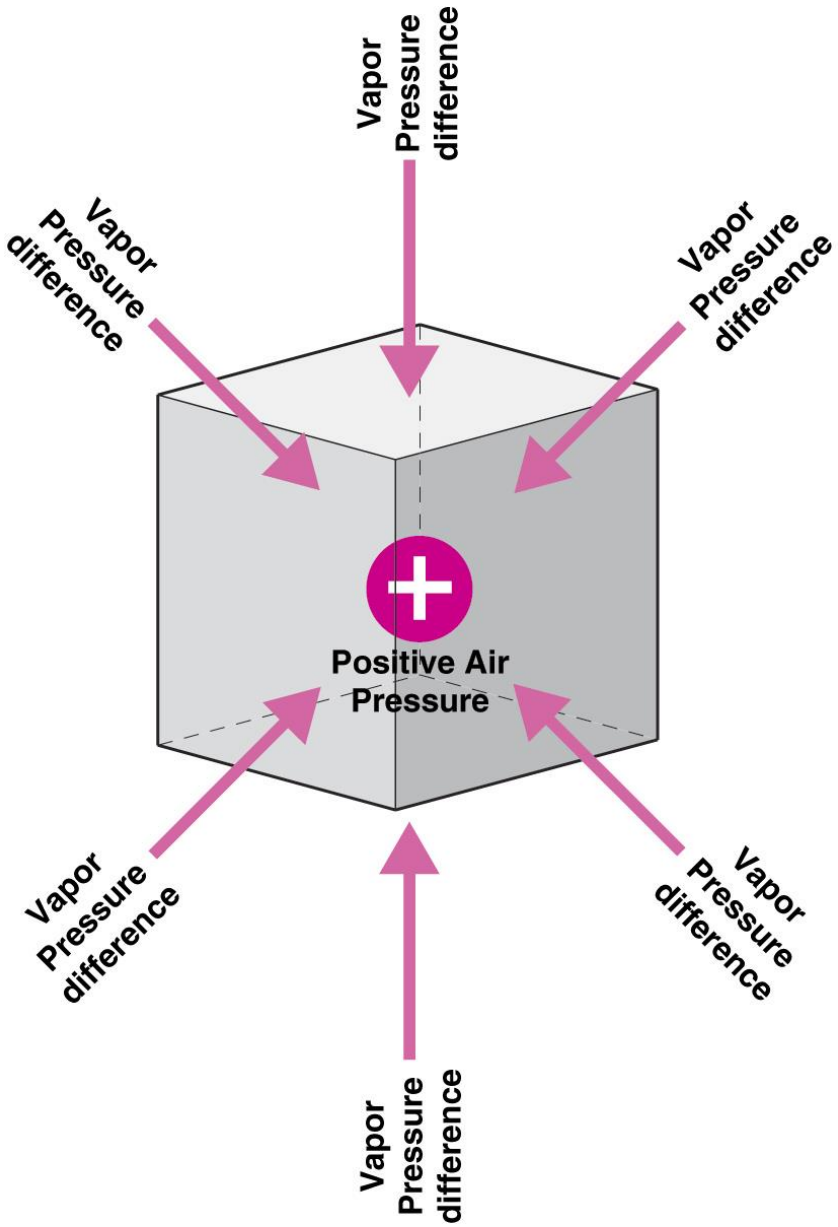
Vapor Pressure difference
Vapor Pressure difference
Vapor Pressure difference
Positive Air Pressure
Vapor Pressure difference
Vapor Pressure difference
Vapor Pressure difference

Moisture Movement

Rain

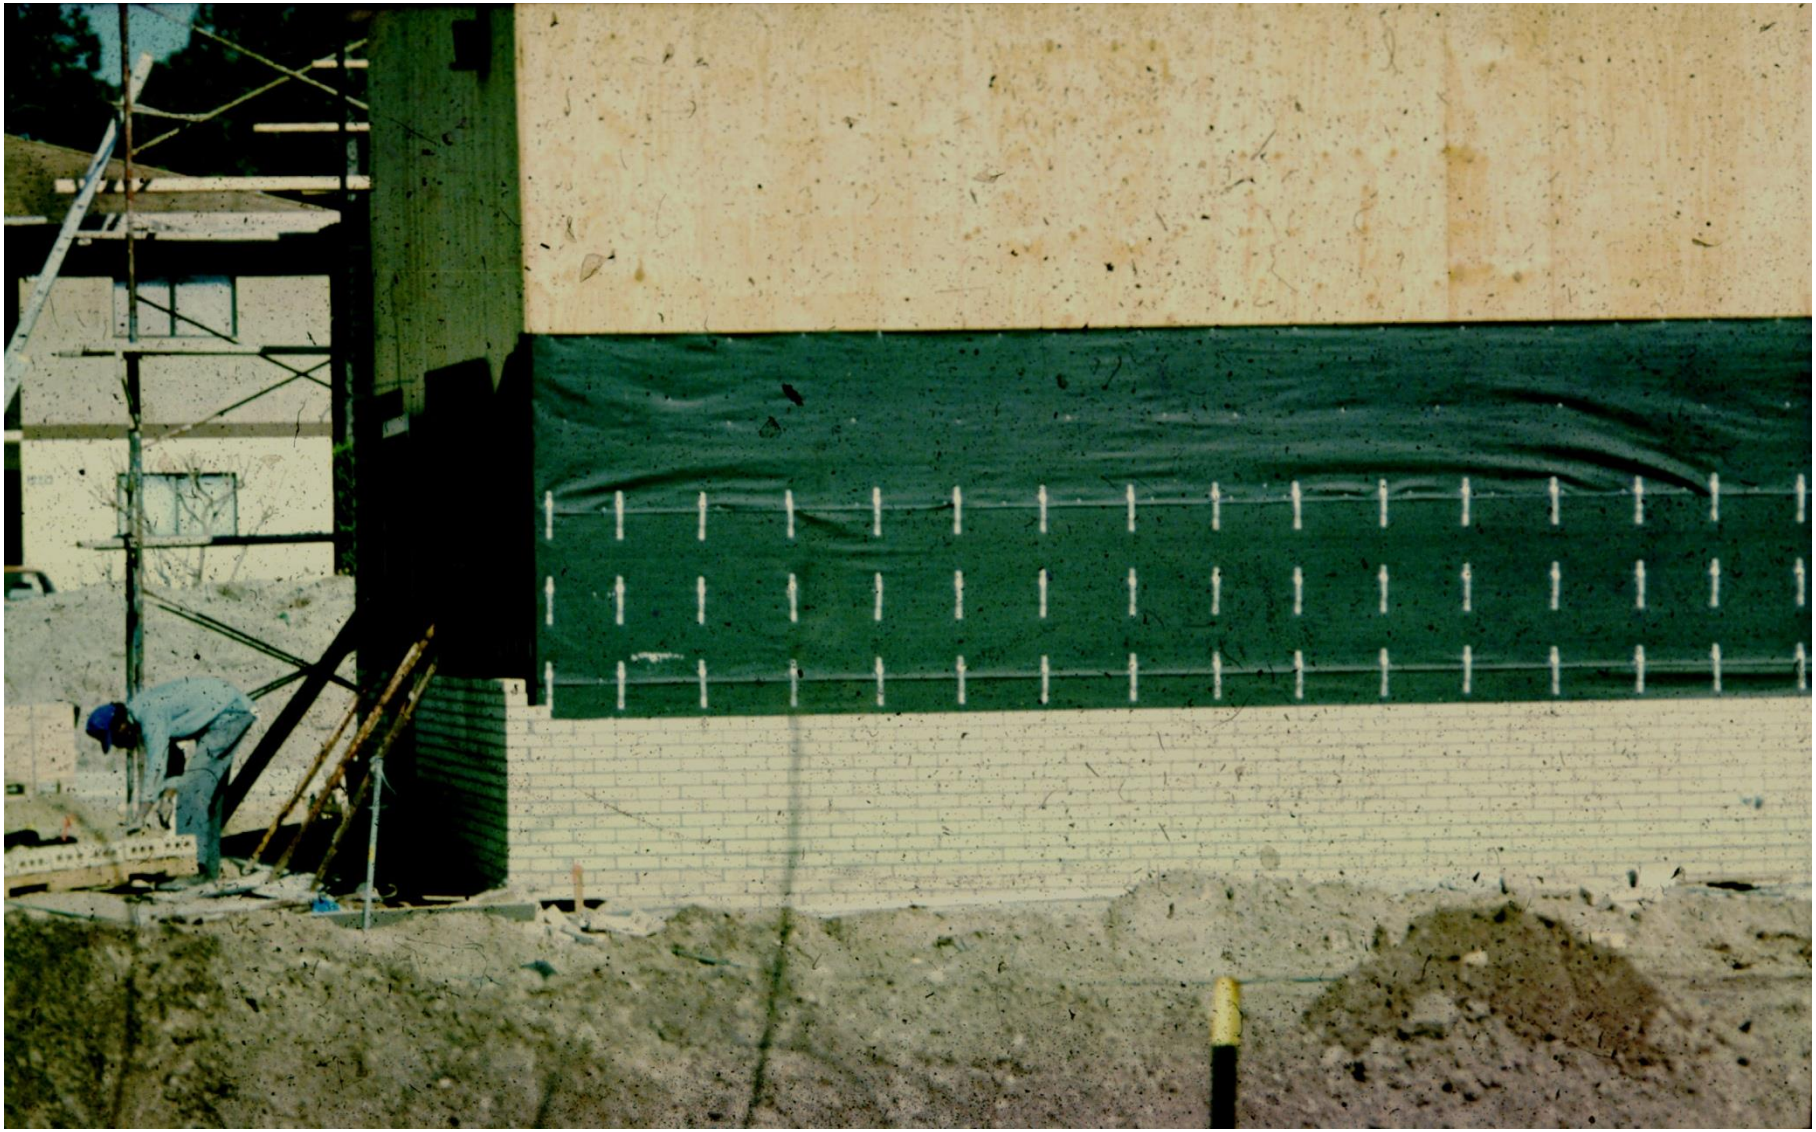

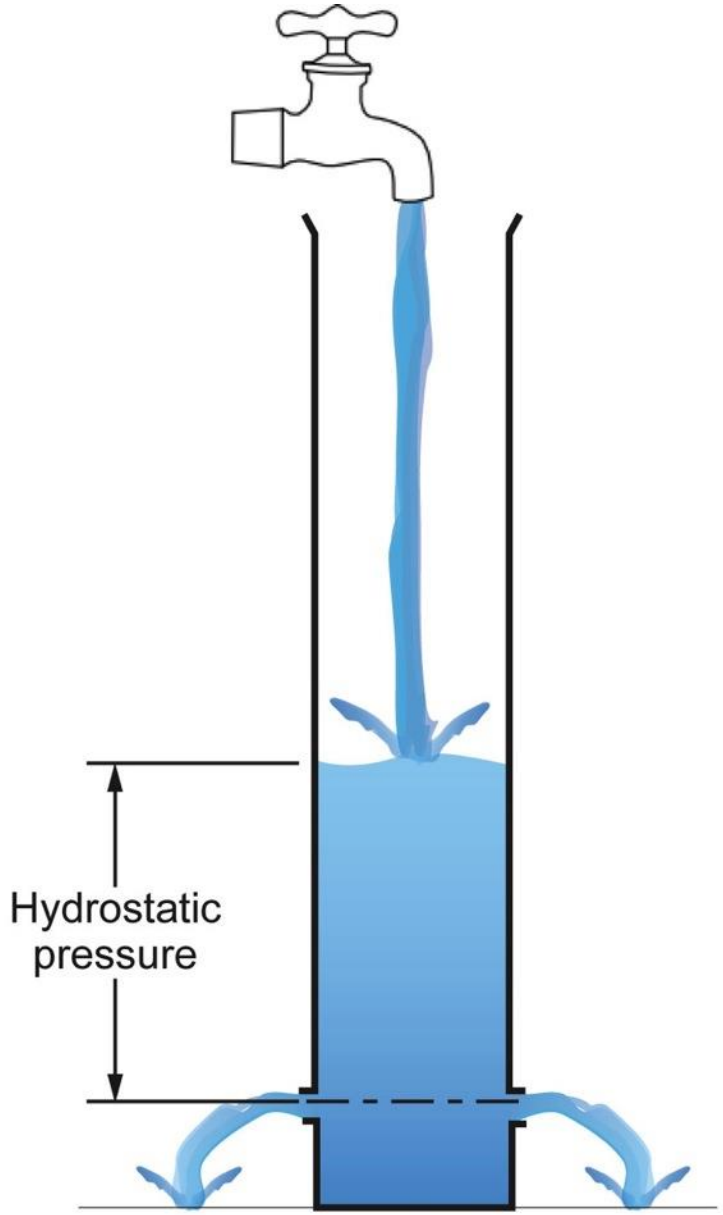
Hydrostatic
pressure

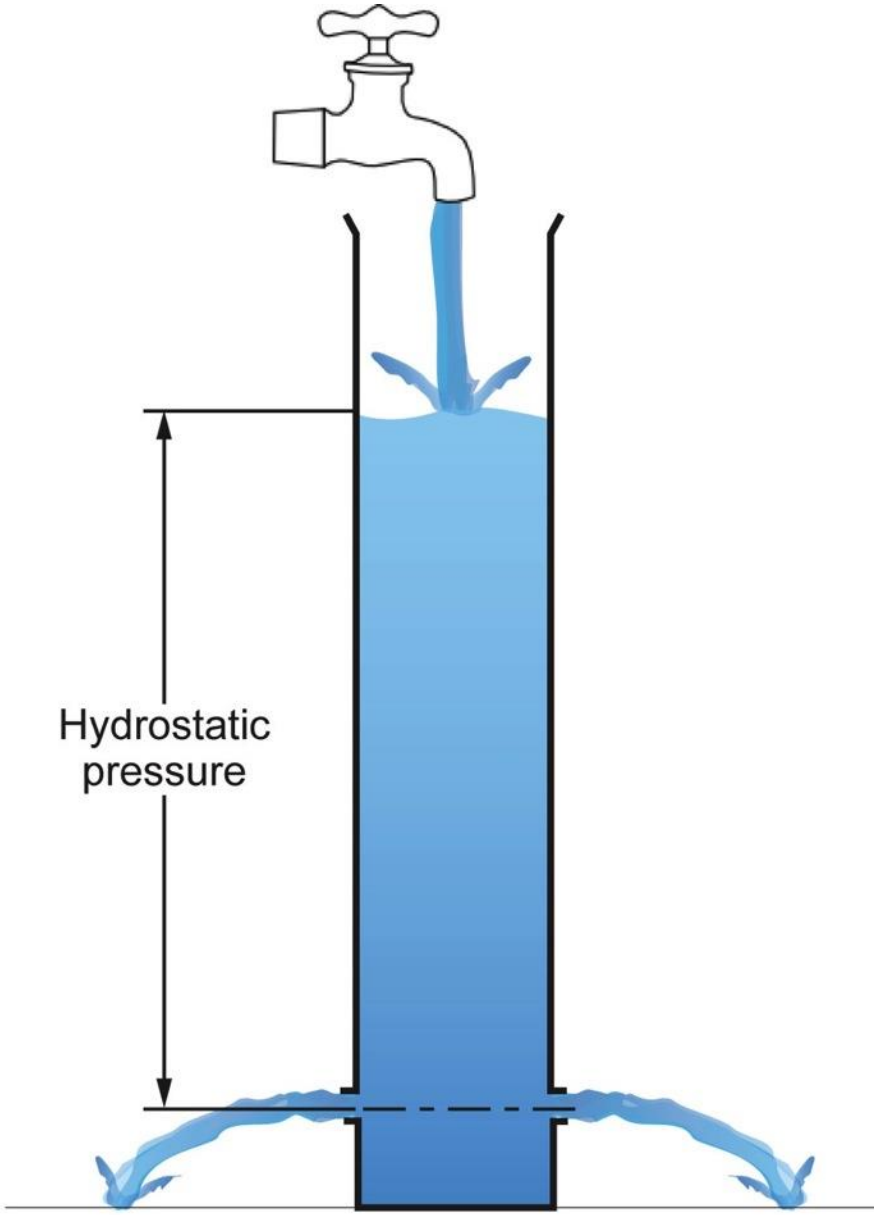
Hydrostatic
pressure

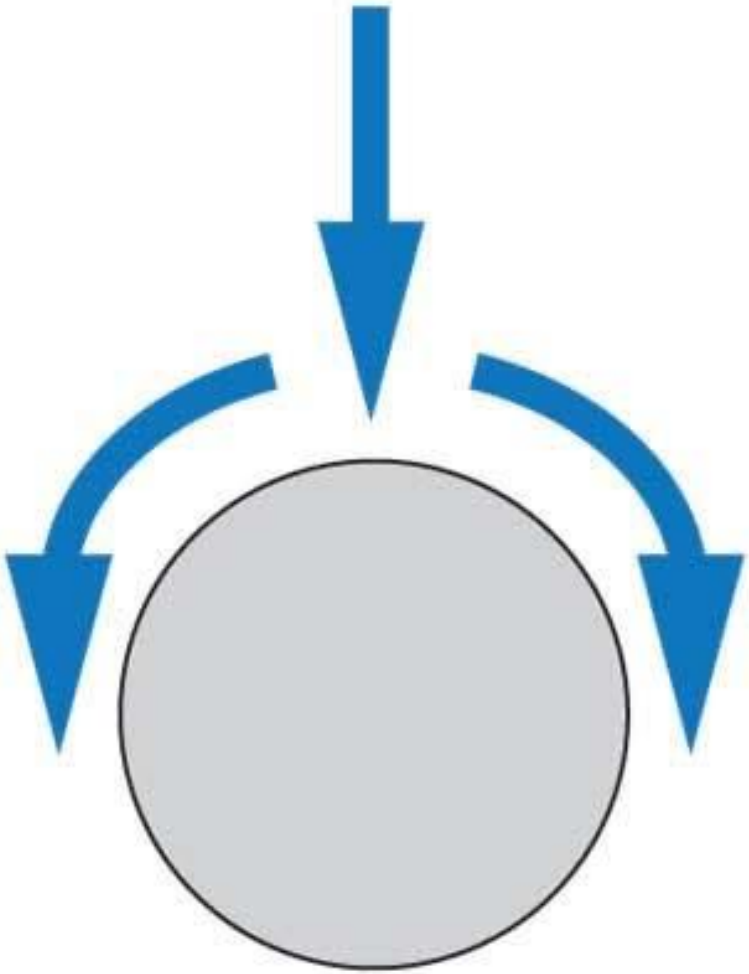

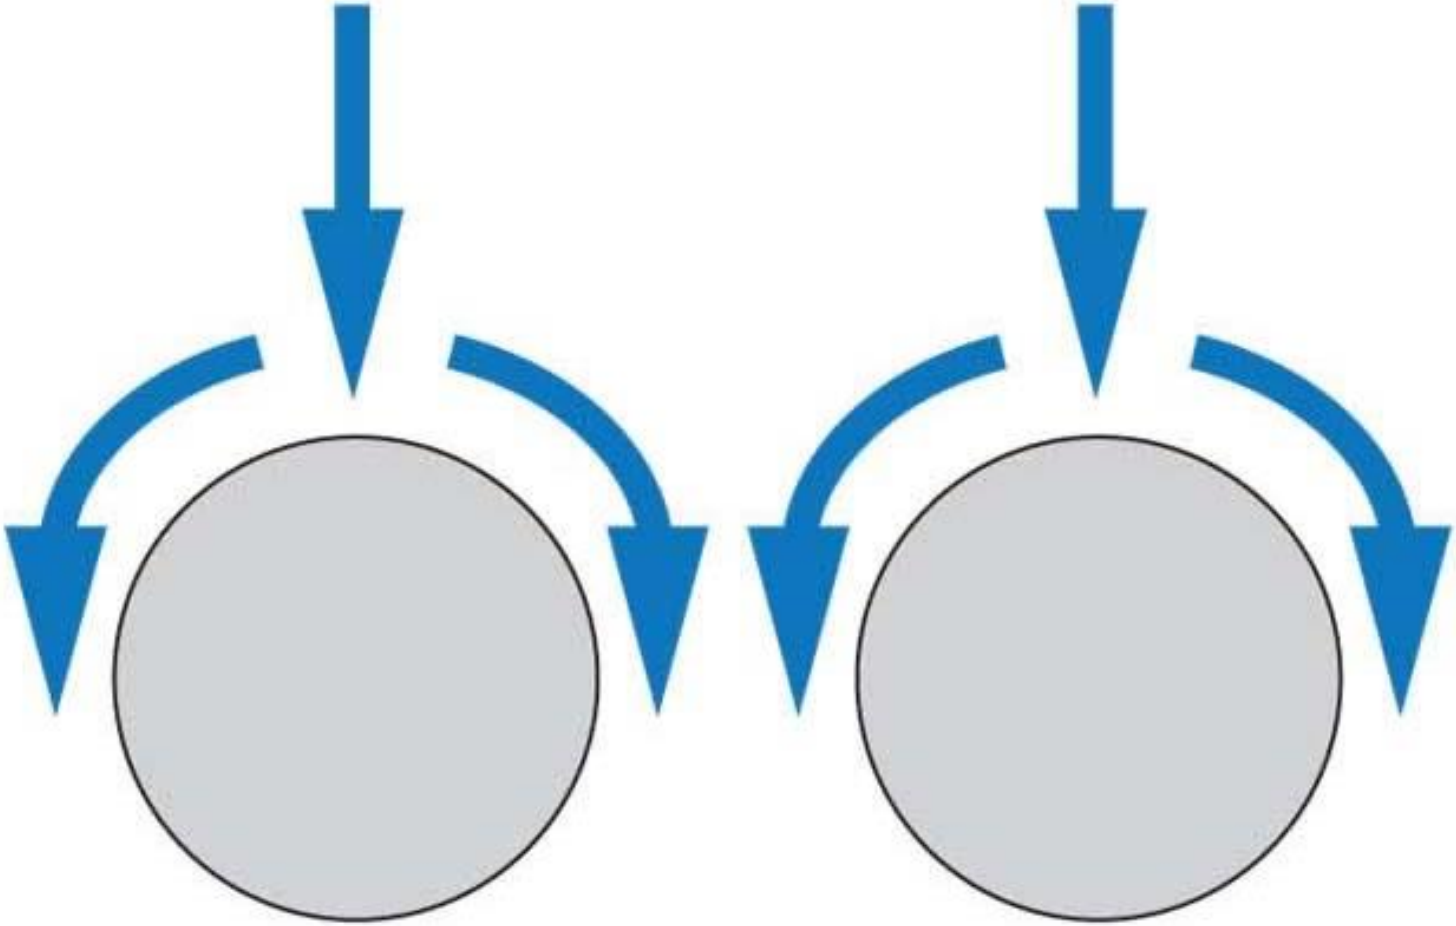

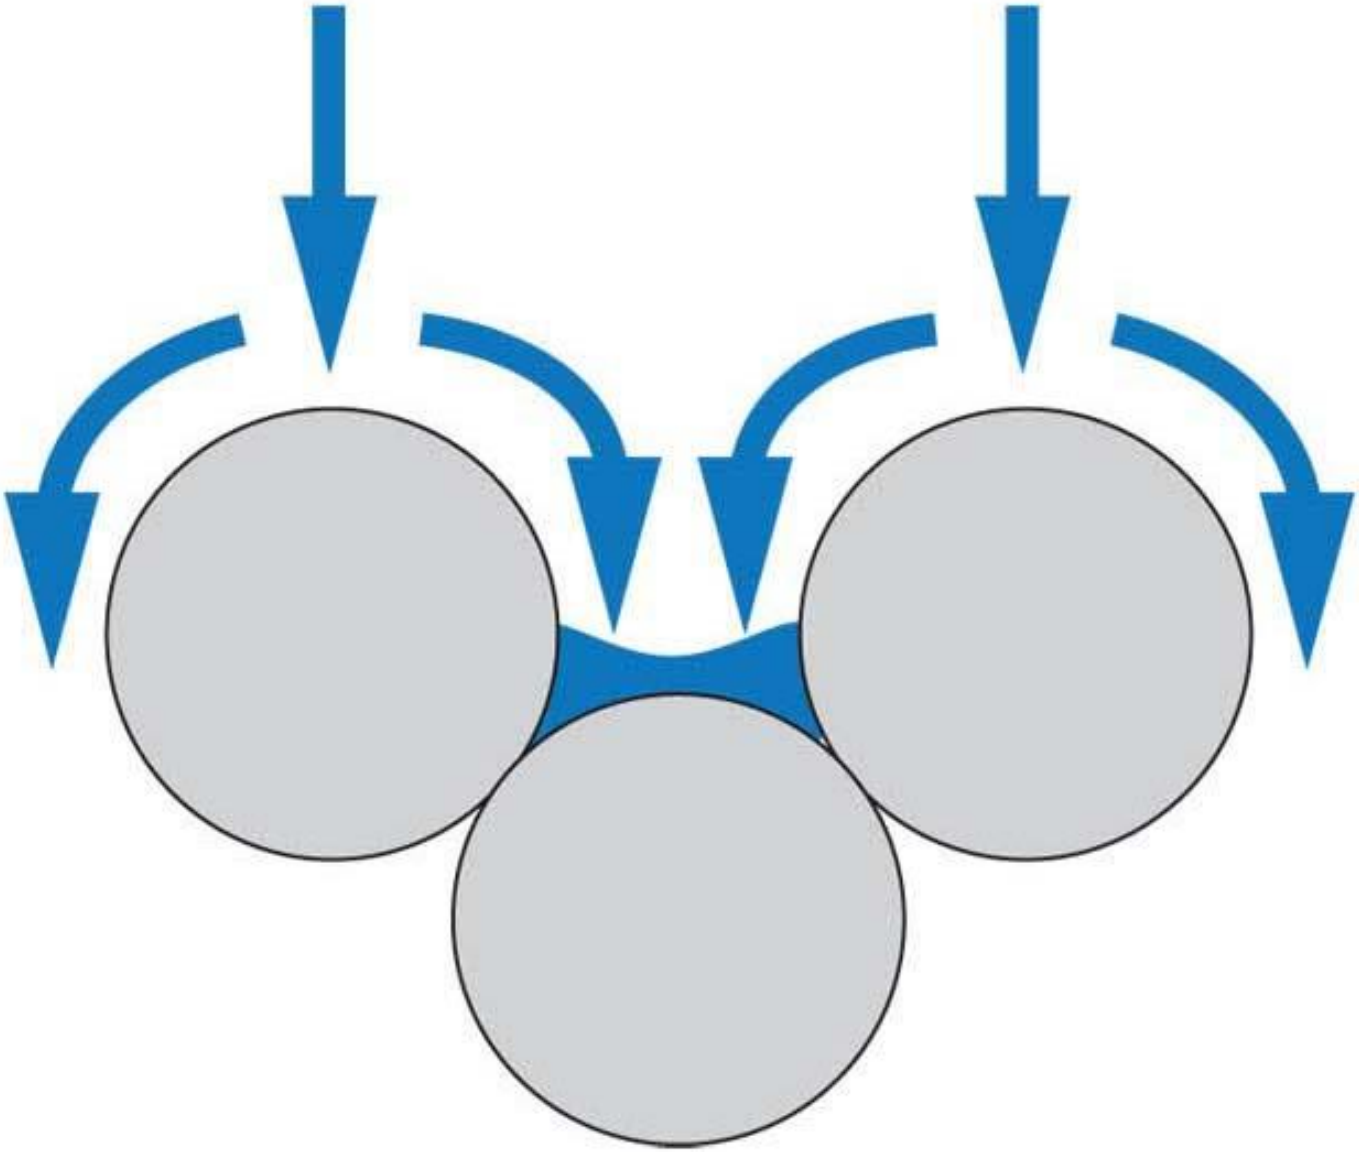

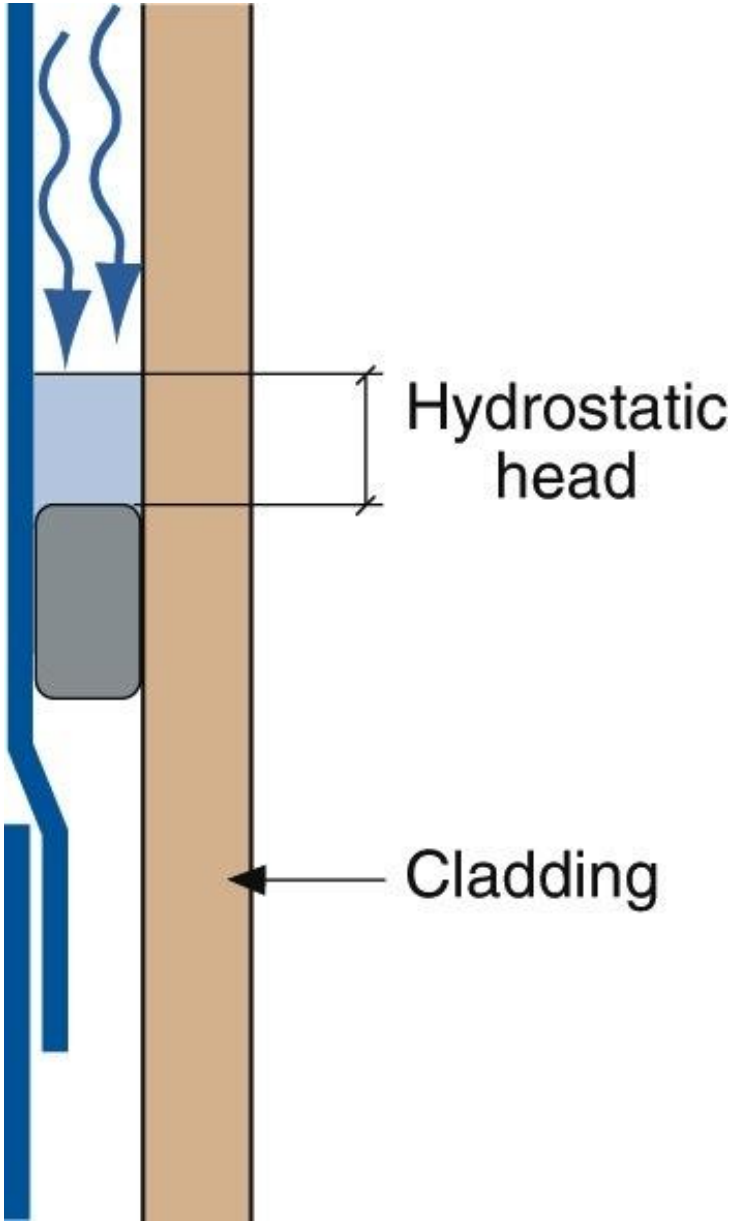
Hydrostatic
head
Cladding

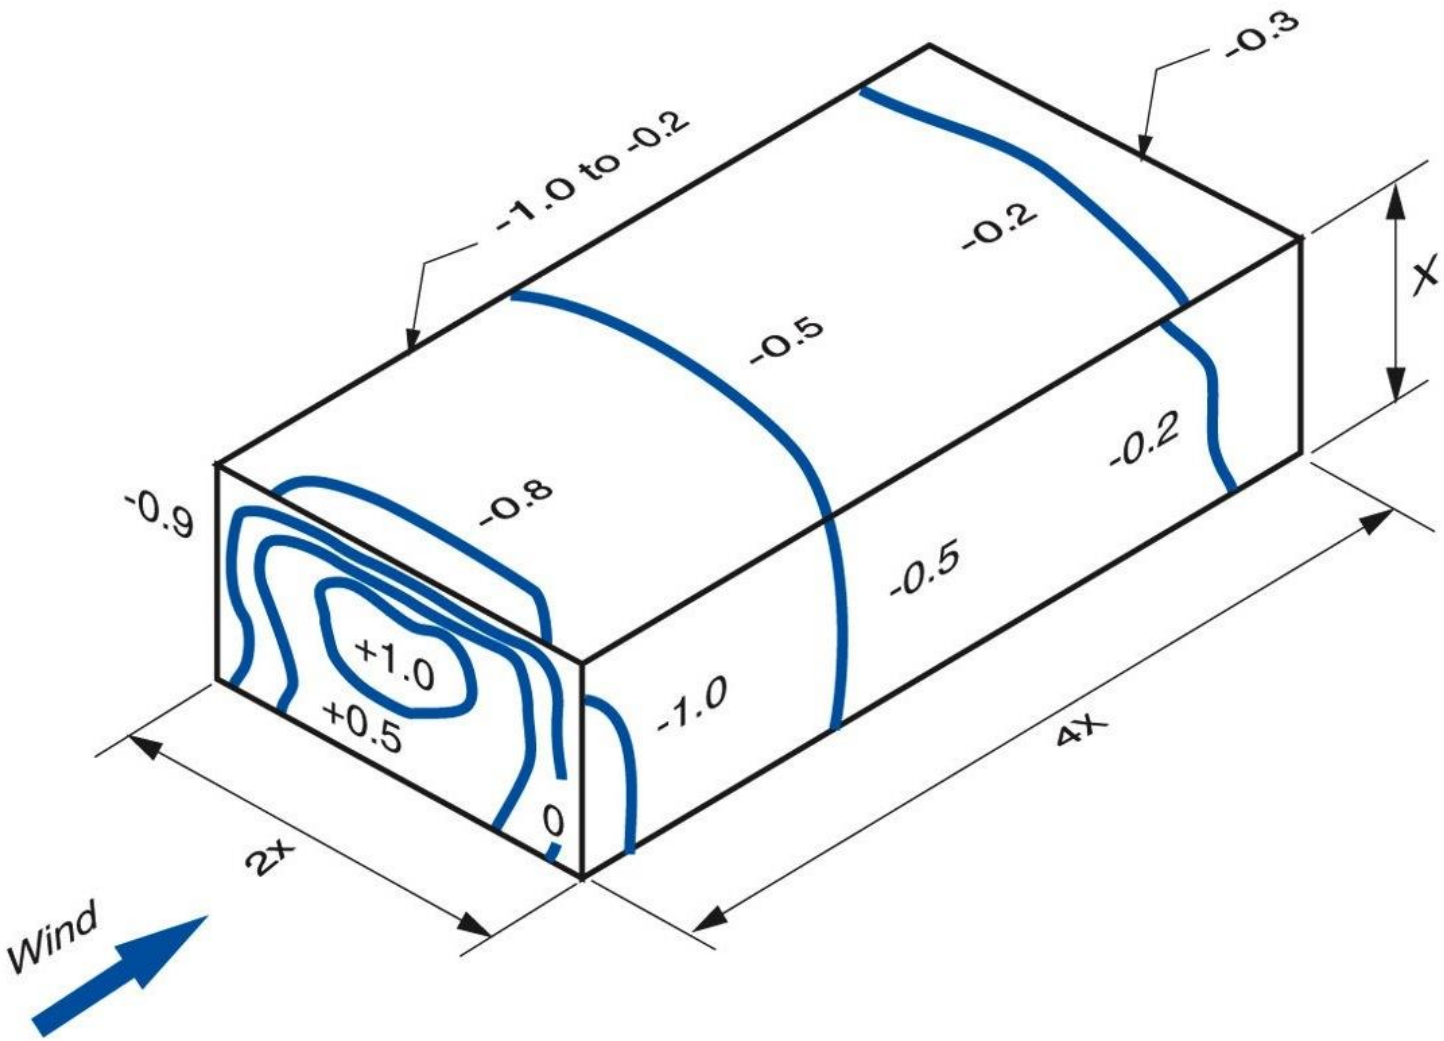
-0.3
-1.0 to -0.2
-0.2
-0.5
-0.2
-0.9
-0.8
-0.5
+1.0
+0.5
-1.0
0
X
2X
4X
Wind

Pascals		mph
50	Pa =	20 mph
100	Pa =	30 mph
150	Pa =	35 mph
250	Pa =	45 mph
500	Pa =	65 mph
1,000	Pa =	90 mph

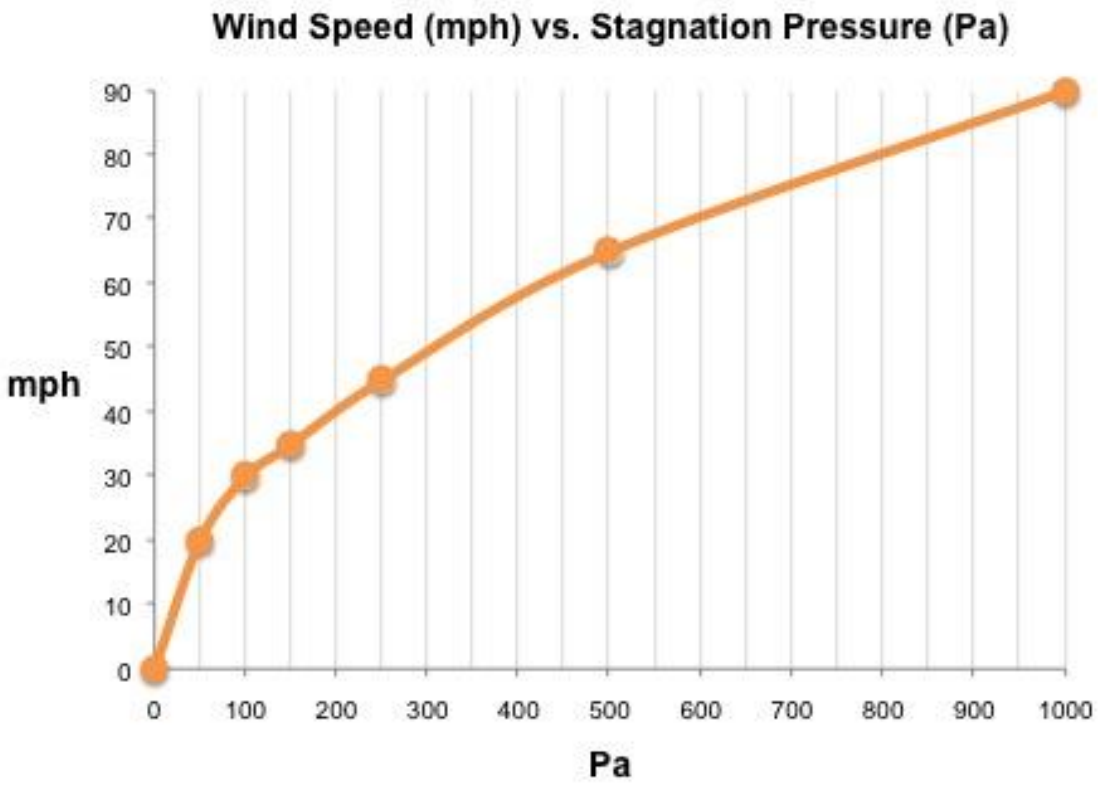


panago
QUILTED TREASURES


panago
QUILTED TREASURES

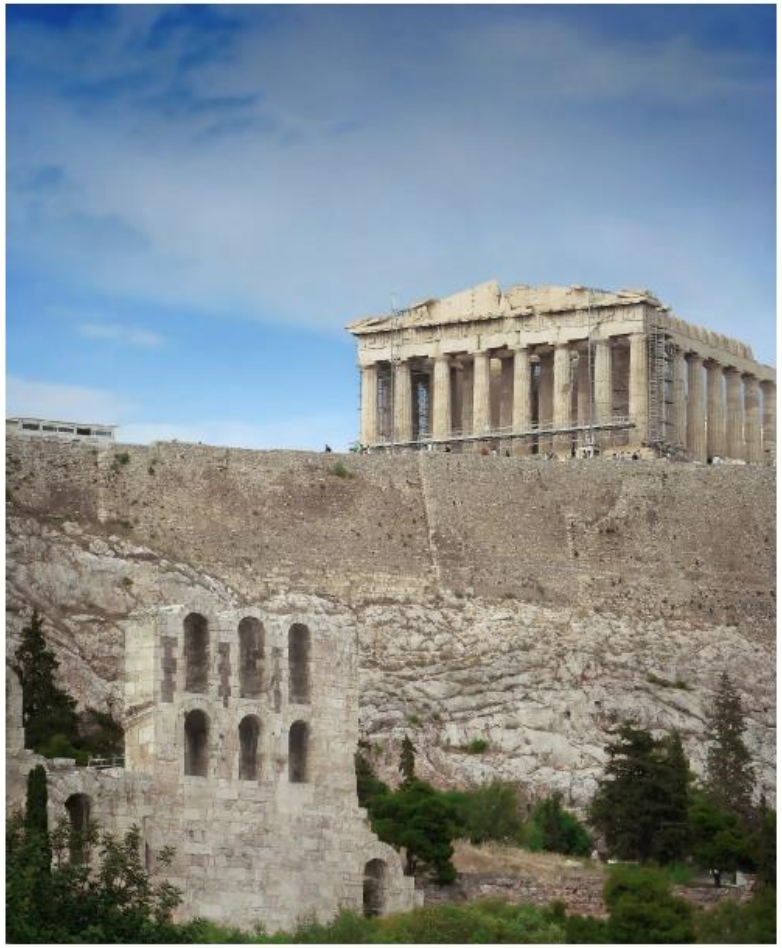


Tyvek
DrainWrap
DUPONT The miracles of science


N-6
IV-7


W1
W3


LOWER
N-2


yvek
omeWrap
Tyve
HomeWrap


Call 1-800-44TYVEK
WWW.TYVEK.COM

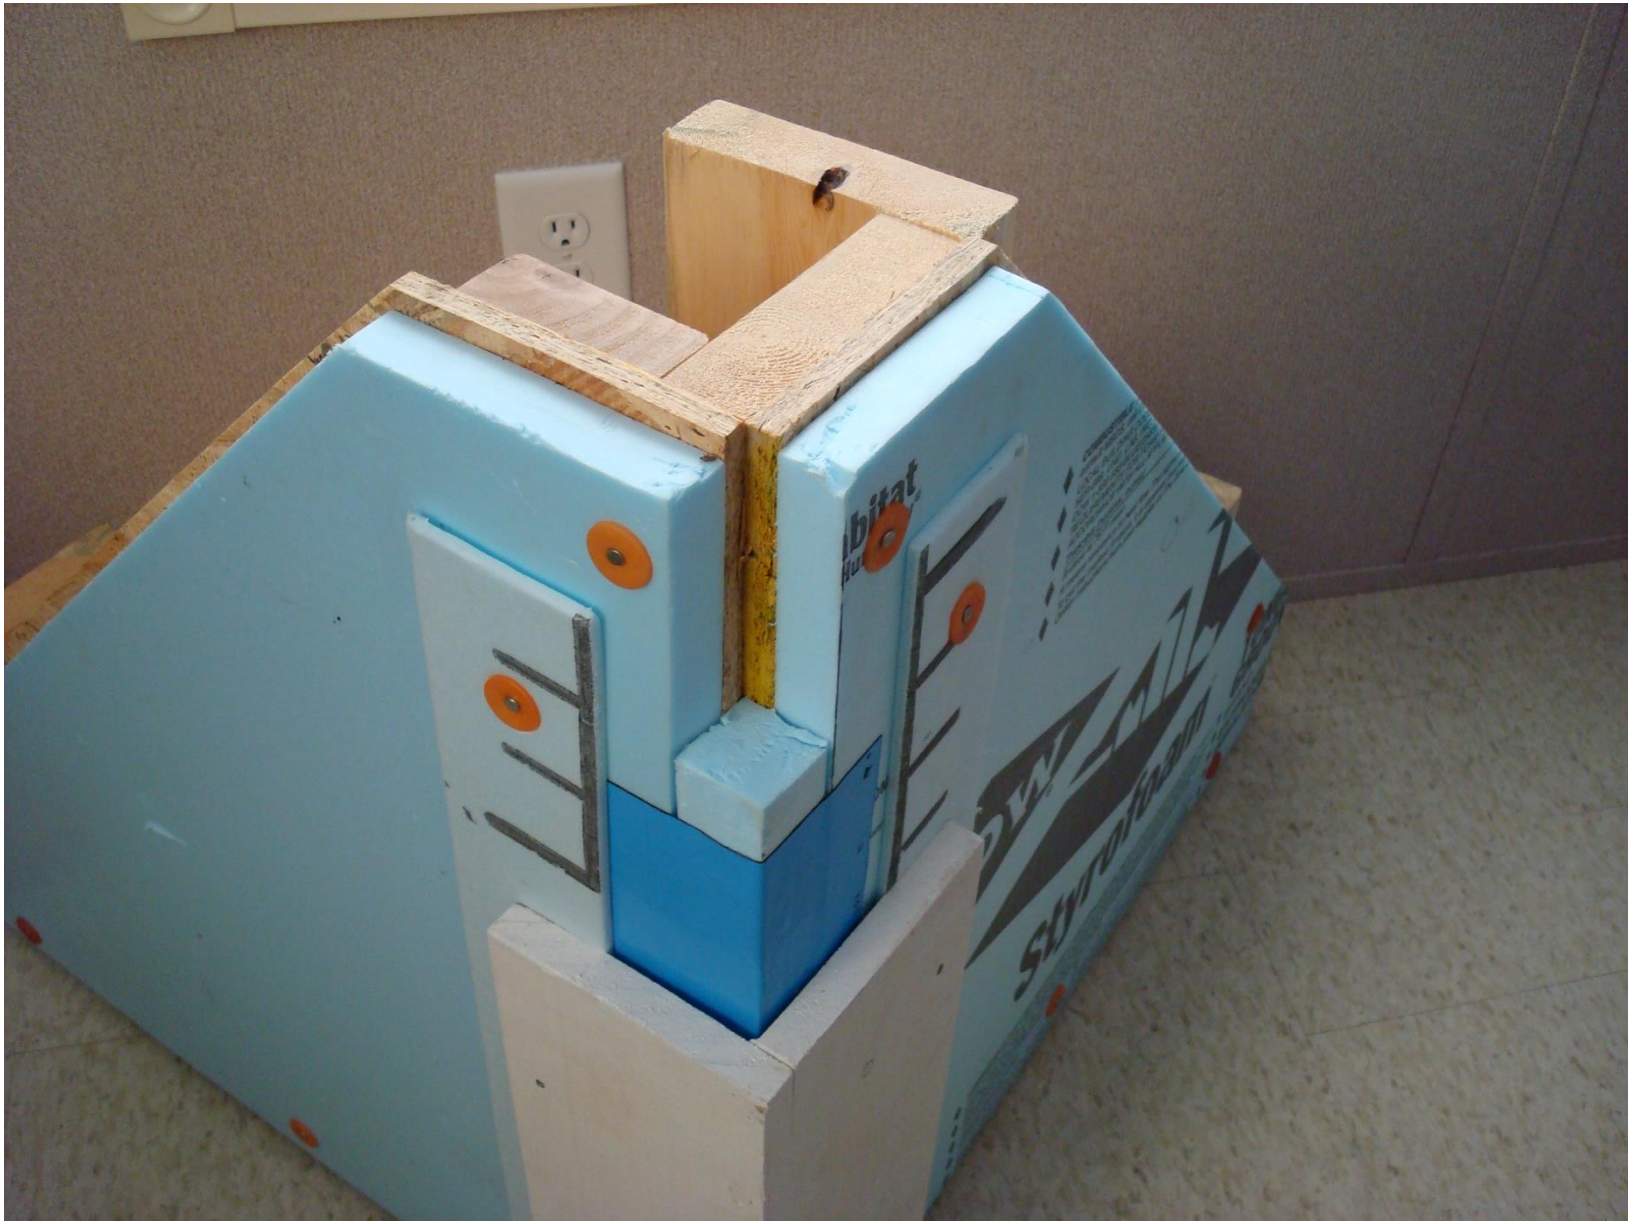
Styrofoam


Tyvek
Tyvek

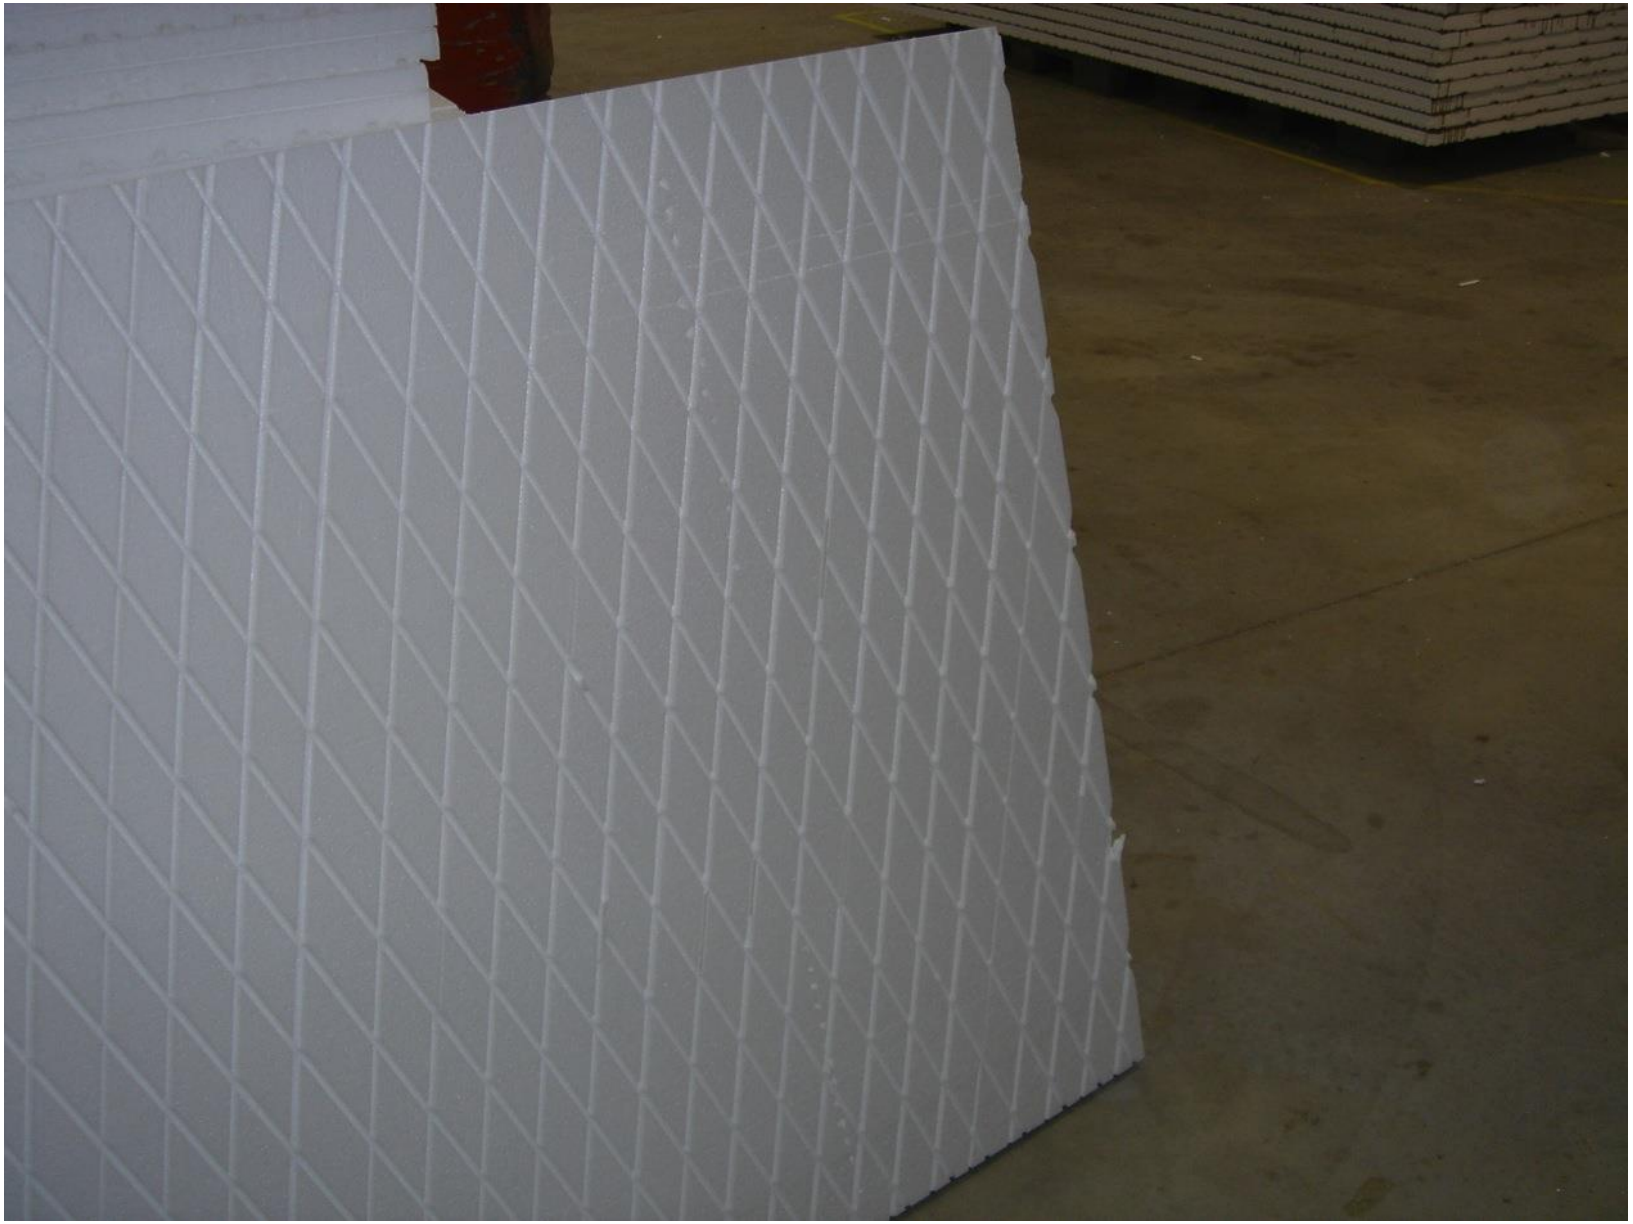

Rain Screen

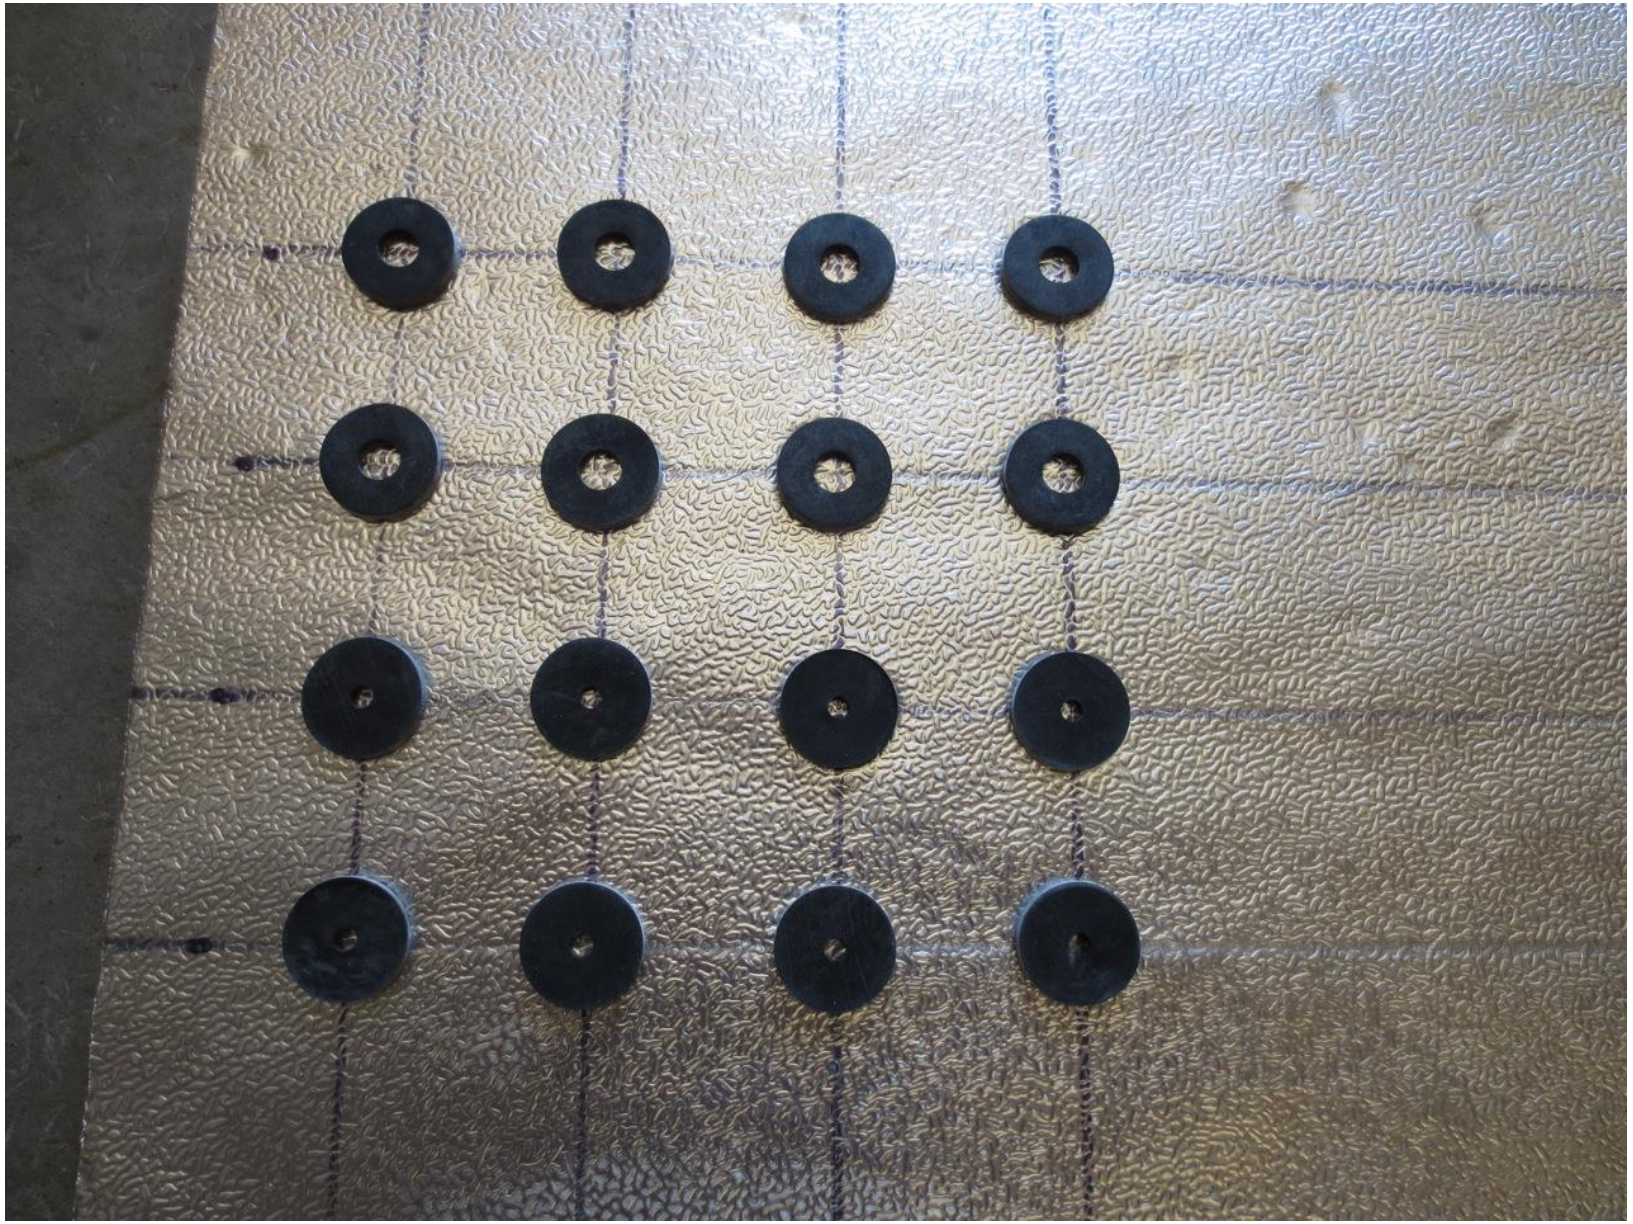

Beer Screen?

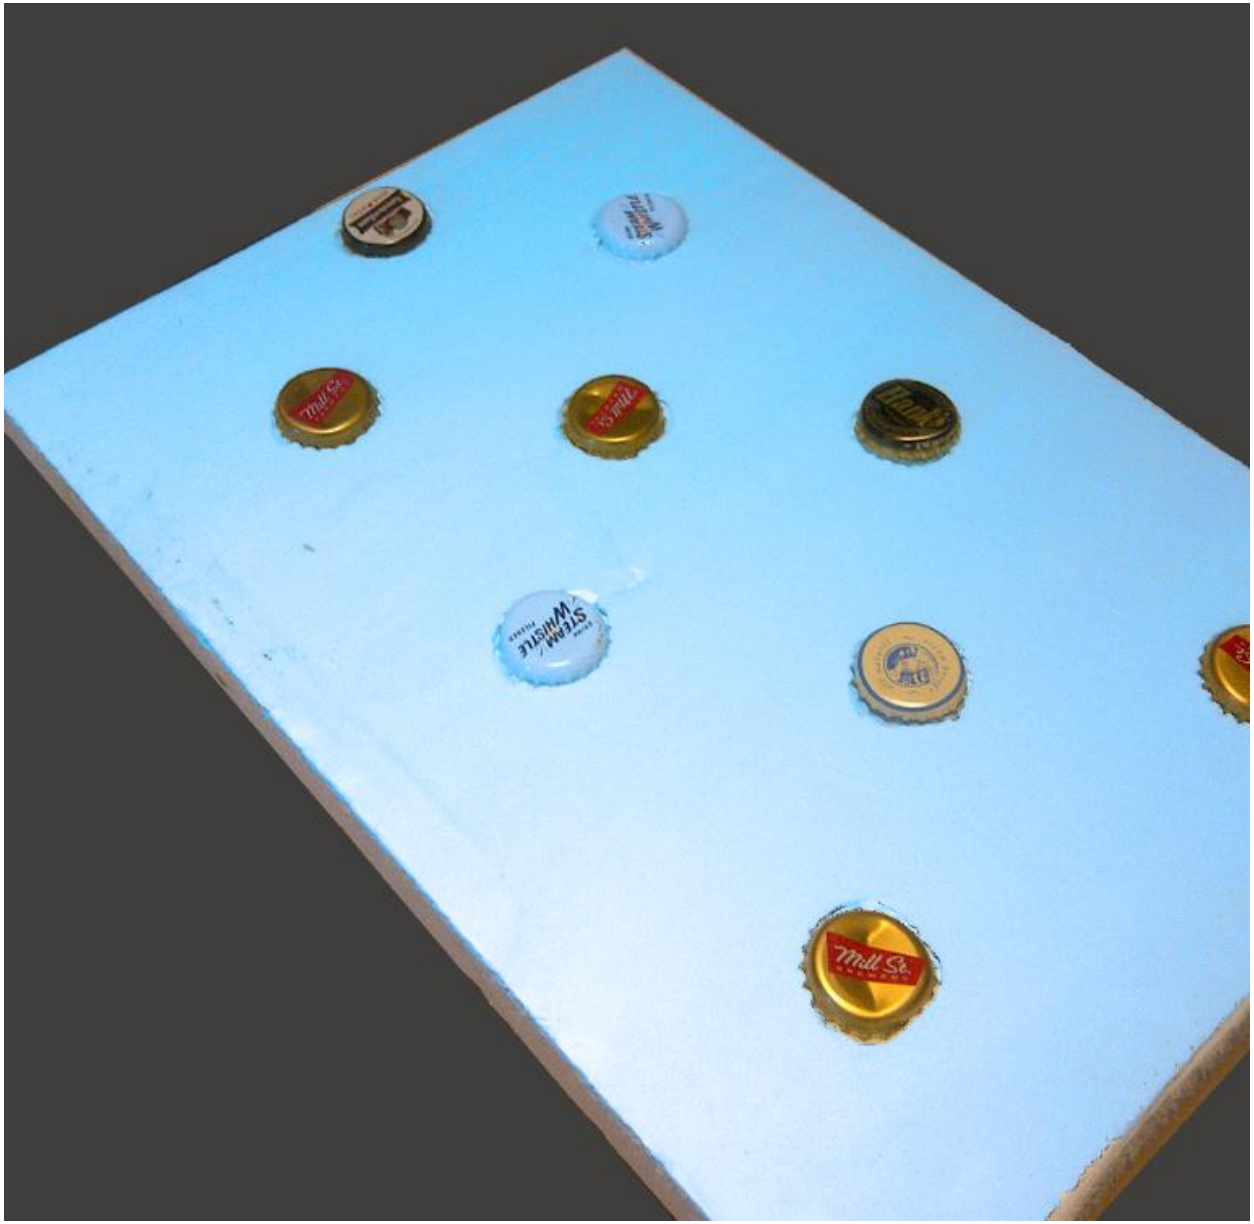
Mill St.
Steam Whistle
Mill St.

Drain the Rain on the Plane

If You Want to Save Cash…Flash

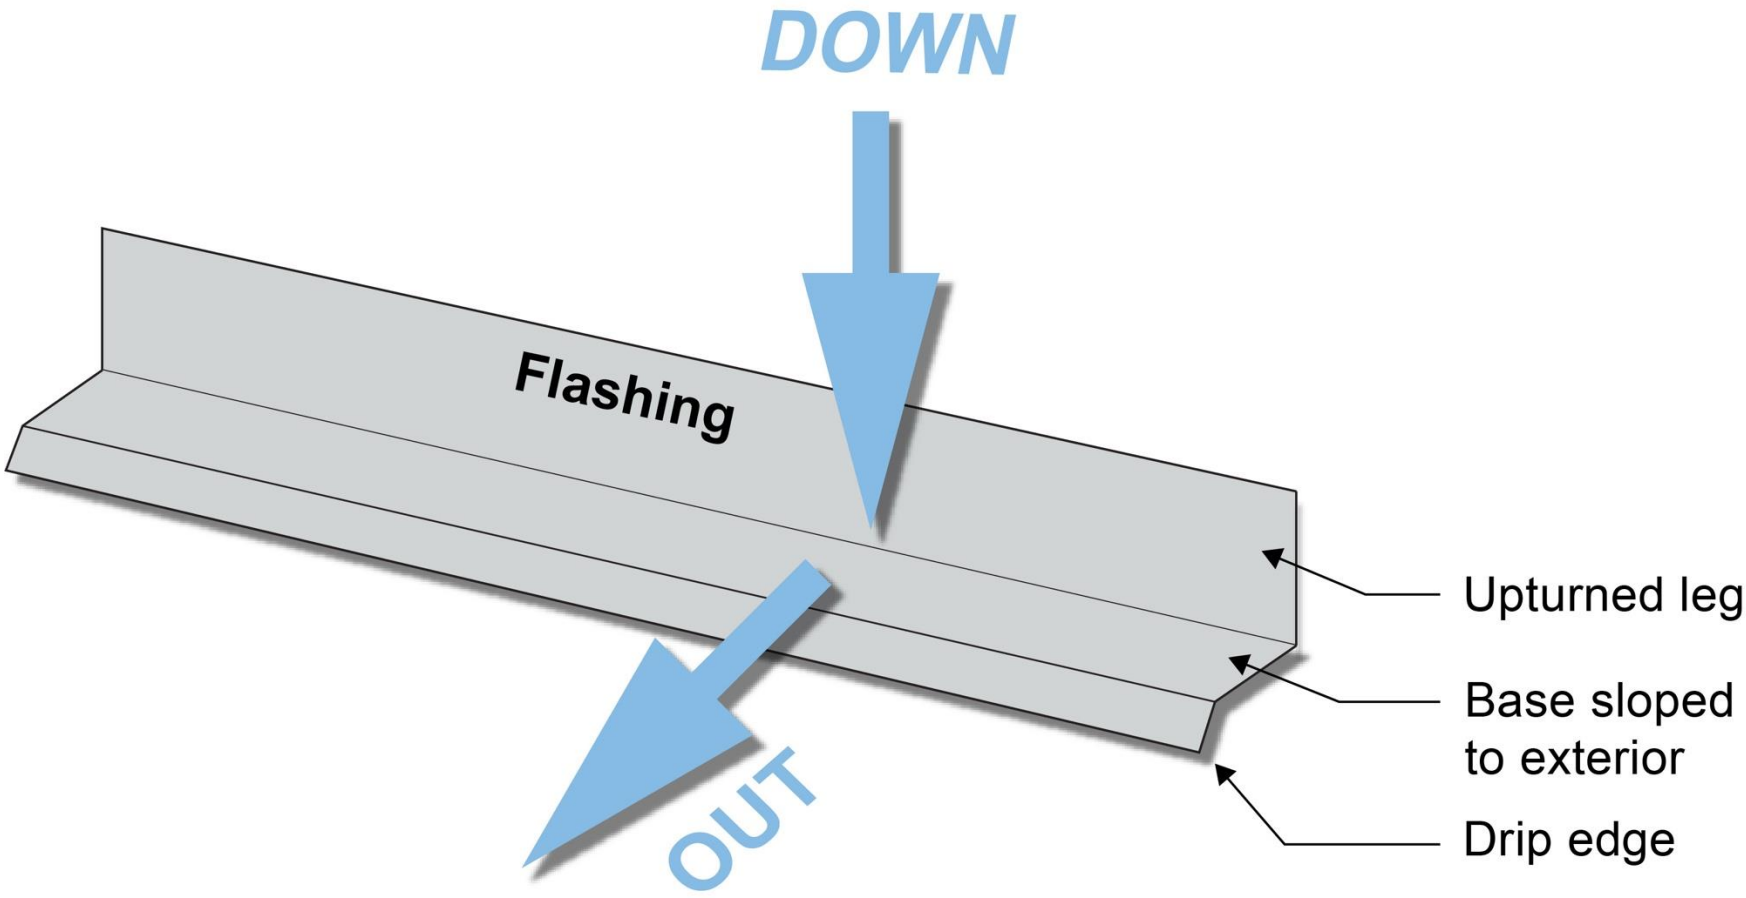
DOWN
Flashing
OUT
Upturned leg
Base sloped
to exterior
Drip edge

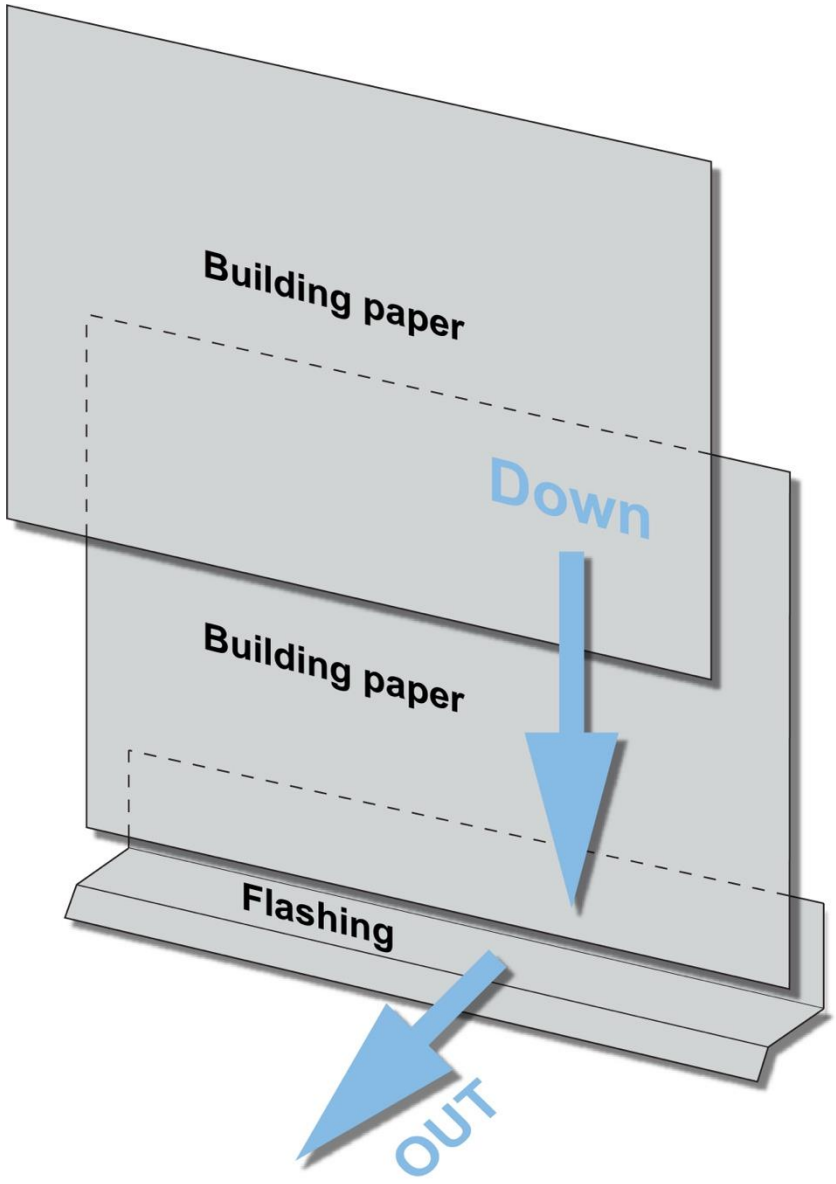
Building paper
Down
Building paper
Flashing
OUT

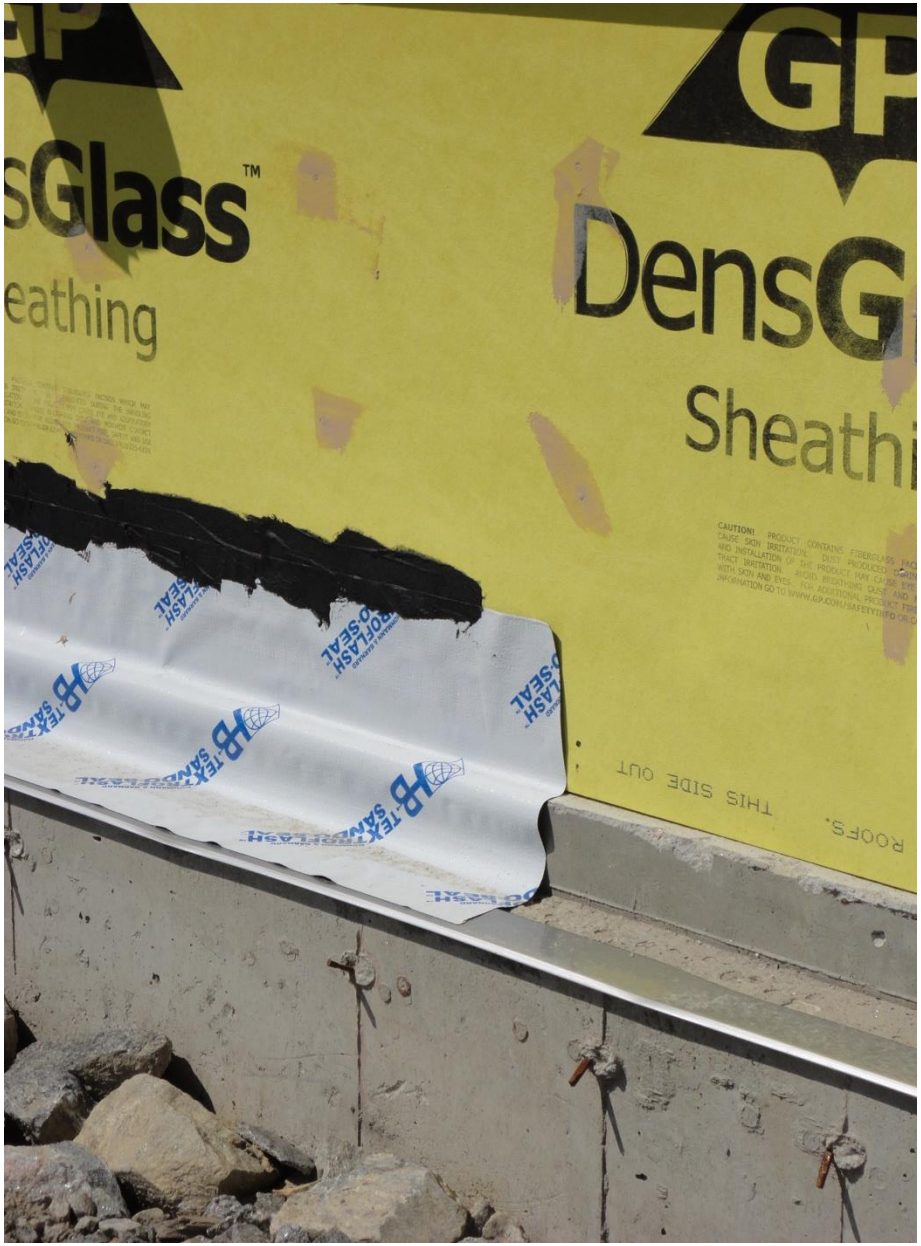
GP
sGlass™
eathing
GP
DensG
Sheathi
CAUTION!
THIS SIDE OUT
ROOFS.


rmax ci
Isolant extérie
Thermax ci
Aislamiento Ext
THERMAX ci

Commercial Enclosure: Simple Layers

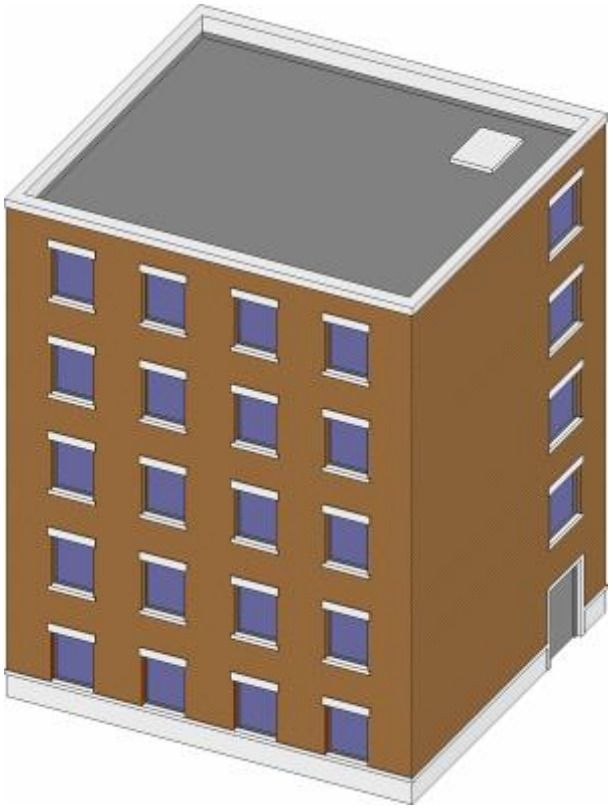

- Structure
- Rain/Air/Vapor
- Insulation
- Finish

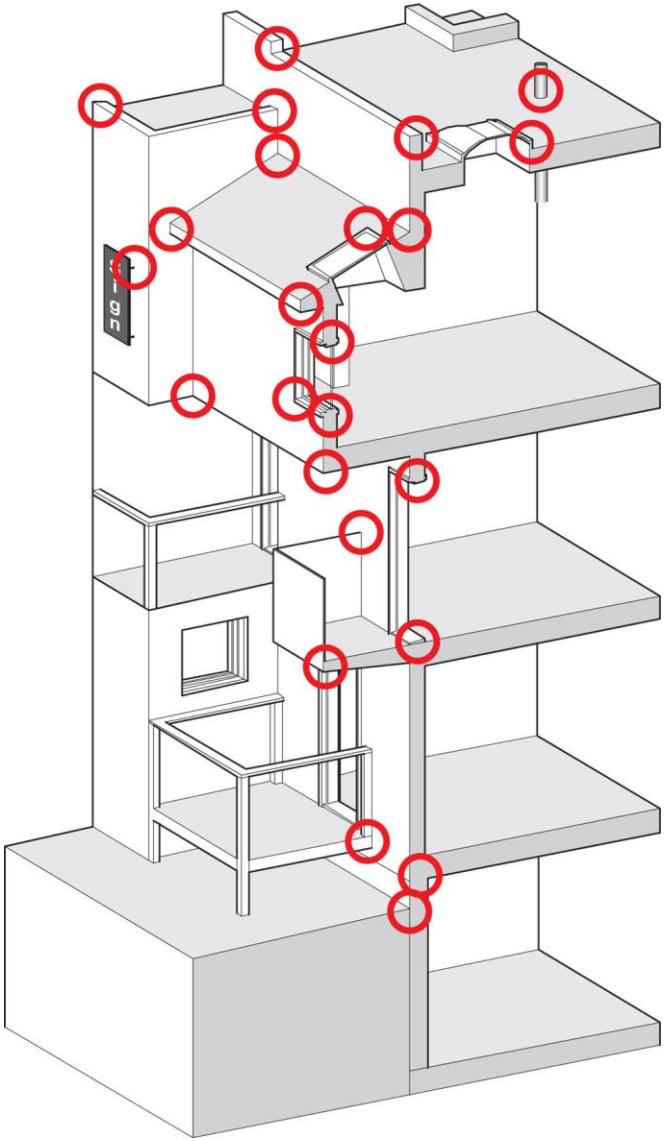

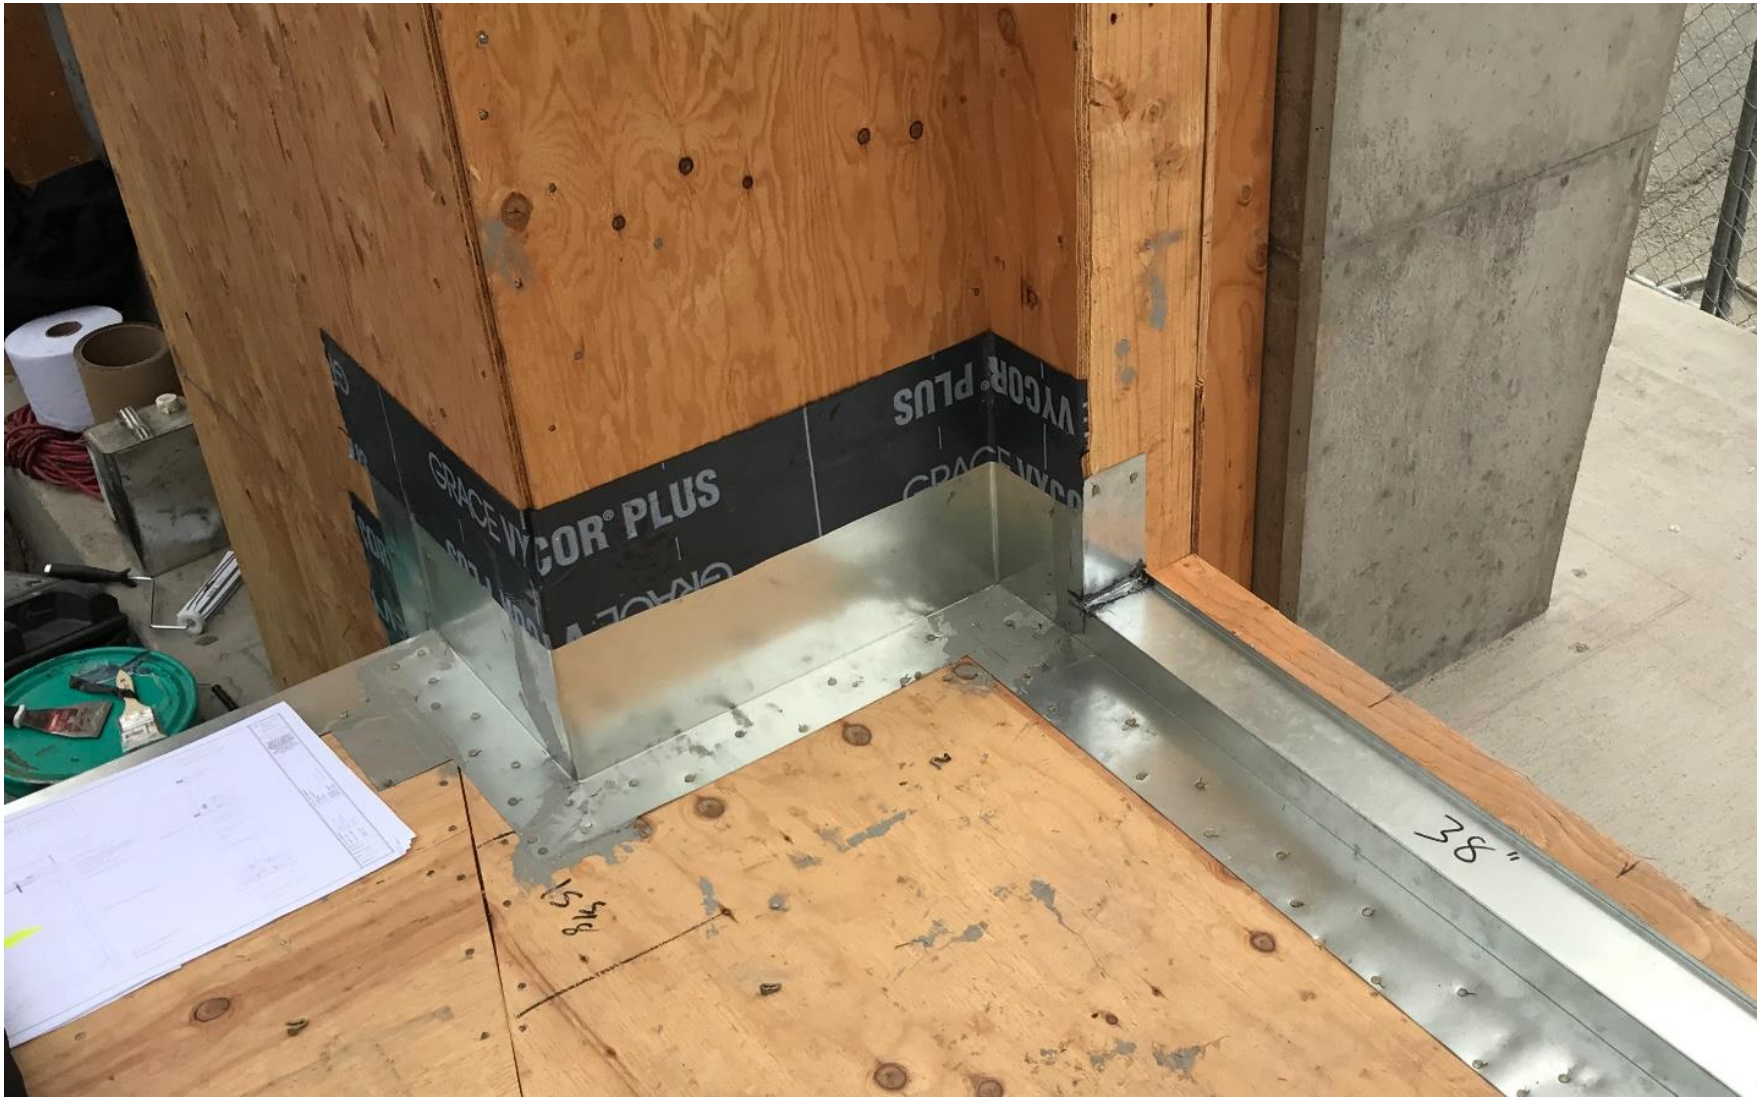
GRACE VYCOR® PLUS
36"

GP
DensGlass
Sheathing
Polyguard
www.polyguardproduct.com


DUPONT
DUPONT
MEL-ROL


Straight Flash

www.polyguard.com
Expect more.


StraightFlash
DUPONT


StraightFlash
StraightFlash
DUPONT


J·A·J Co., Inc.
MASONS
781-395-5510
JULIAN
PURCHASE ST
CONGRESS ST

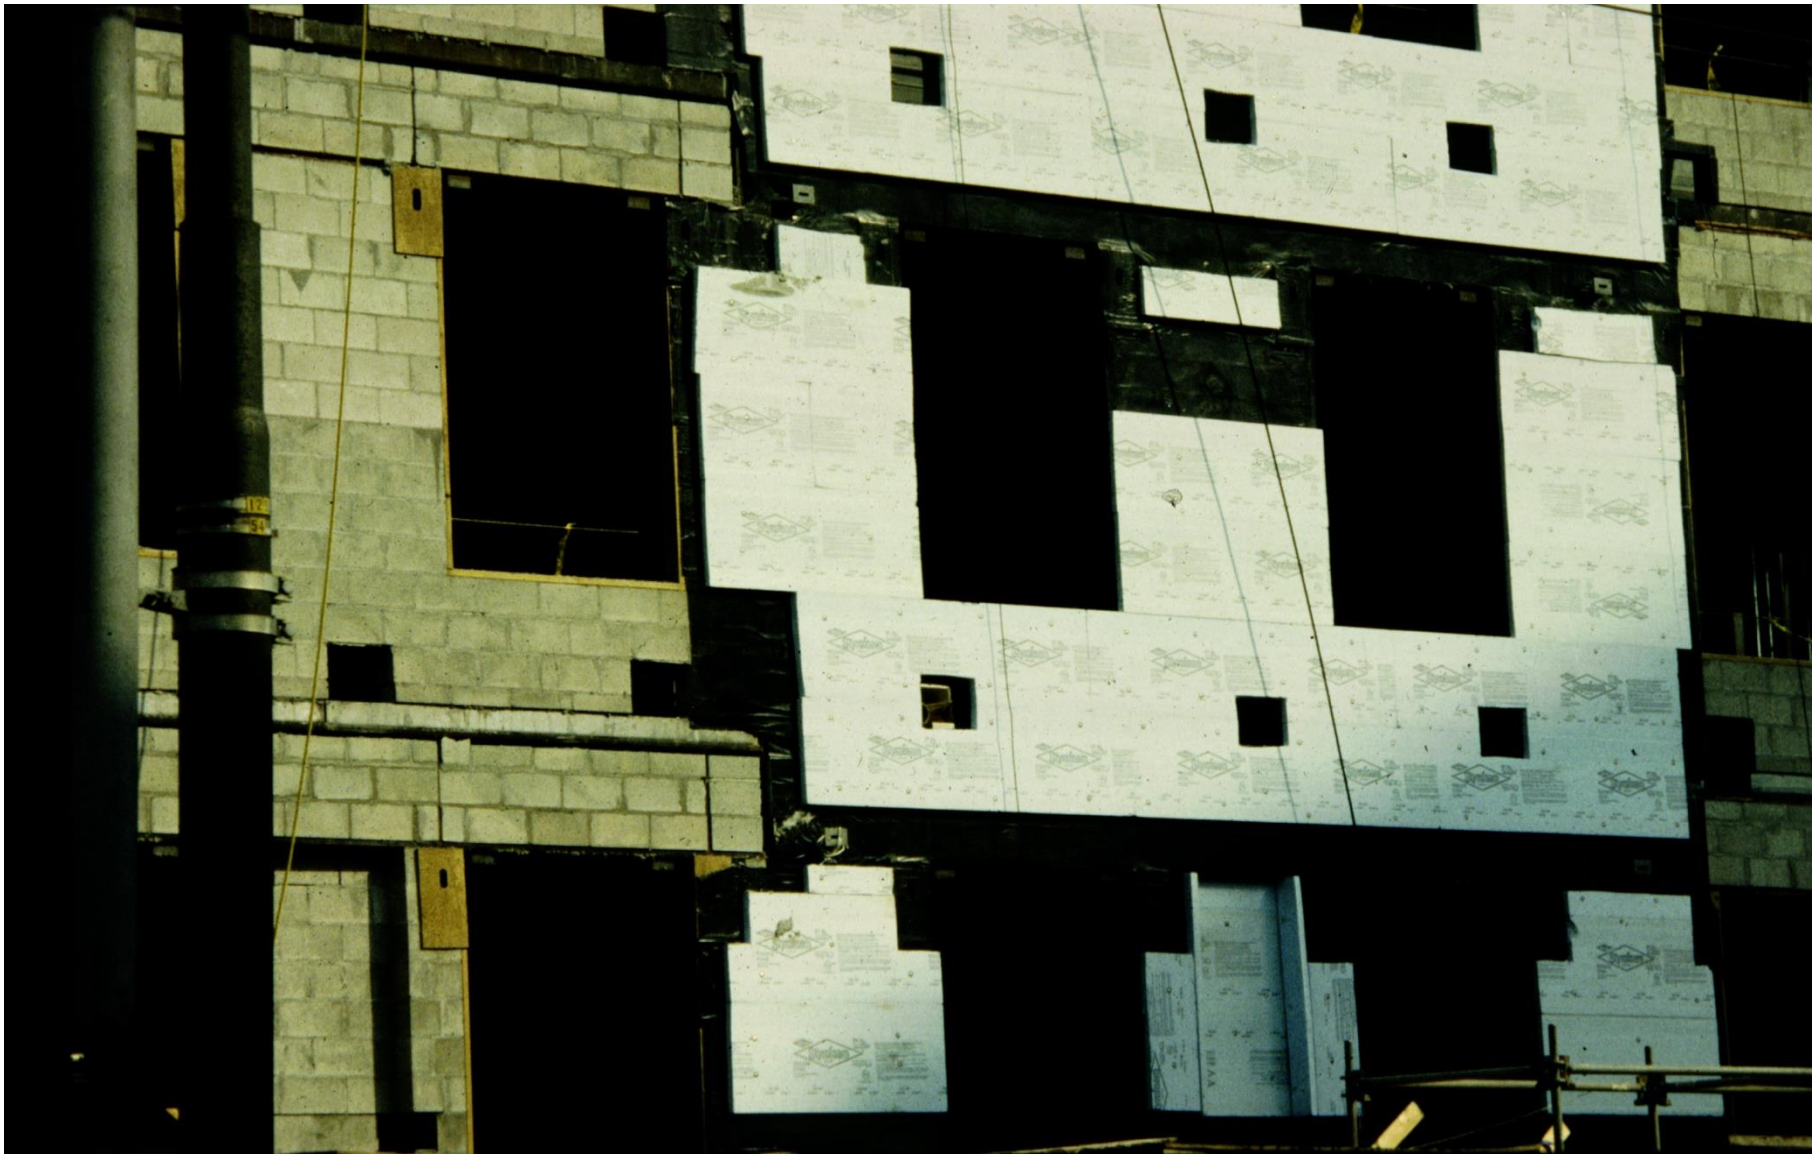


HARVARD SCHOOL OF PUBLIC HEALTH


DUPONT
STYROFOAM
DUPONT
STYROFOAM


GP
DENSGLASS GOLD


GP
DENSGLASS GOLD
Exterior Sheathing
GP
DENSGLASS GOLD
Exterior Sheathing


Blueskin
CAVITY WALL SYSTEMS


Street
Cleaning


BlueSkin VP160


REPUBLIC
491 Maple Street
Danvers, MA


AVAILAB
Up to 22,000
Medical or Profes
OMNI PROPE
978-369-4


GP
DensGlass
Sheathing


MARKET BASKET
"MORE FOR YOUR DOLLAR"
DensGlass


Tyvek
PRIVATE PARKING

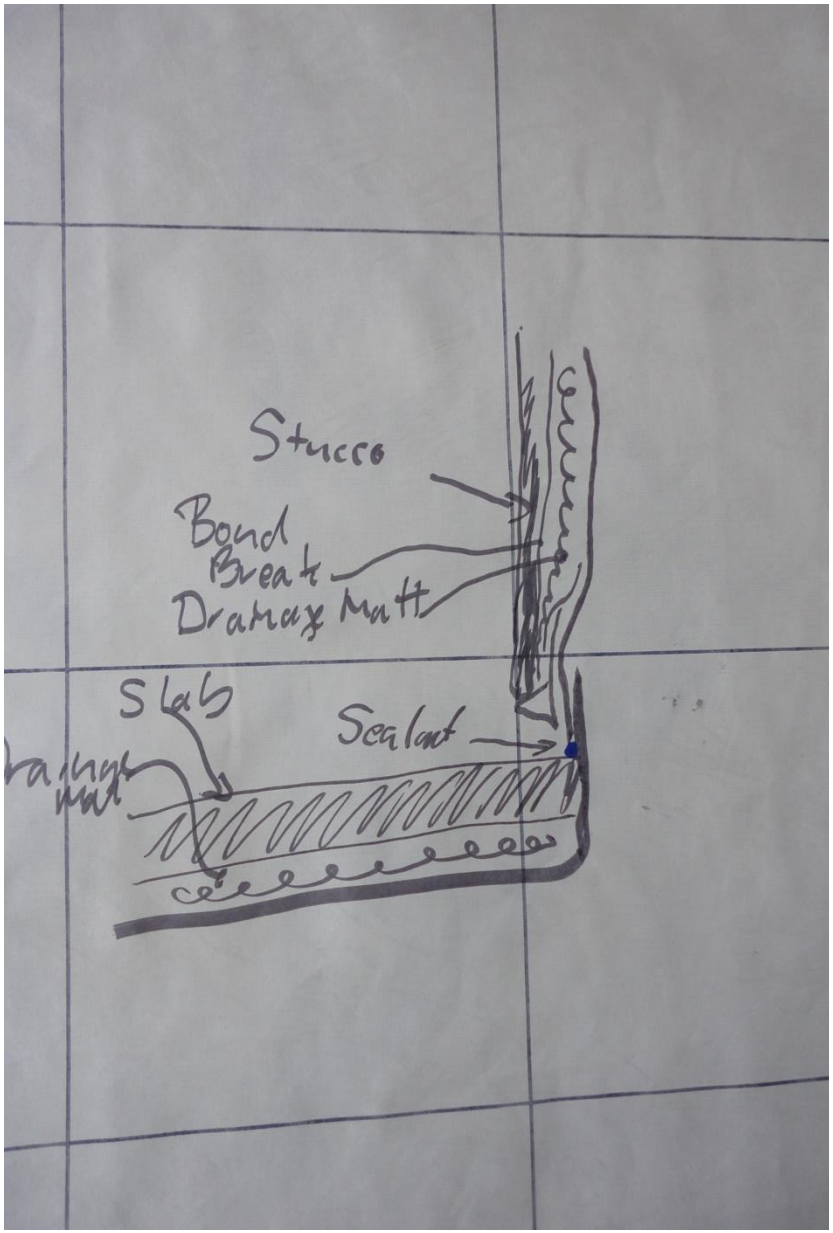
Stucco
Bond Break
Drainage Matt
Slab
Sealant


Call 1-800-44-TYVEK WWW.CONSTRUCTION.TYVEK.COM
DUPONT The miracles of science™
HDPE
DUPONT


Tyvek
COMMERCIALWRAP

National Gypsum
National Gypsum
National Gypsum
EXP


ZIPsystem


DANGER
CONSTRUCTION
AREA
KEEP OUT
LUCIANO

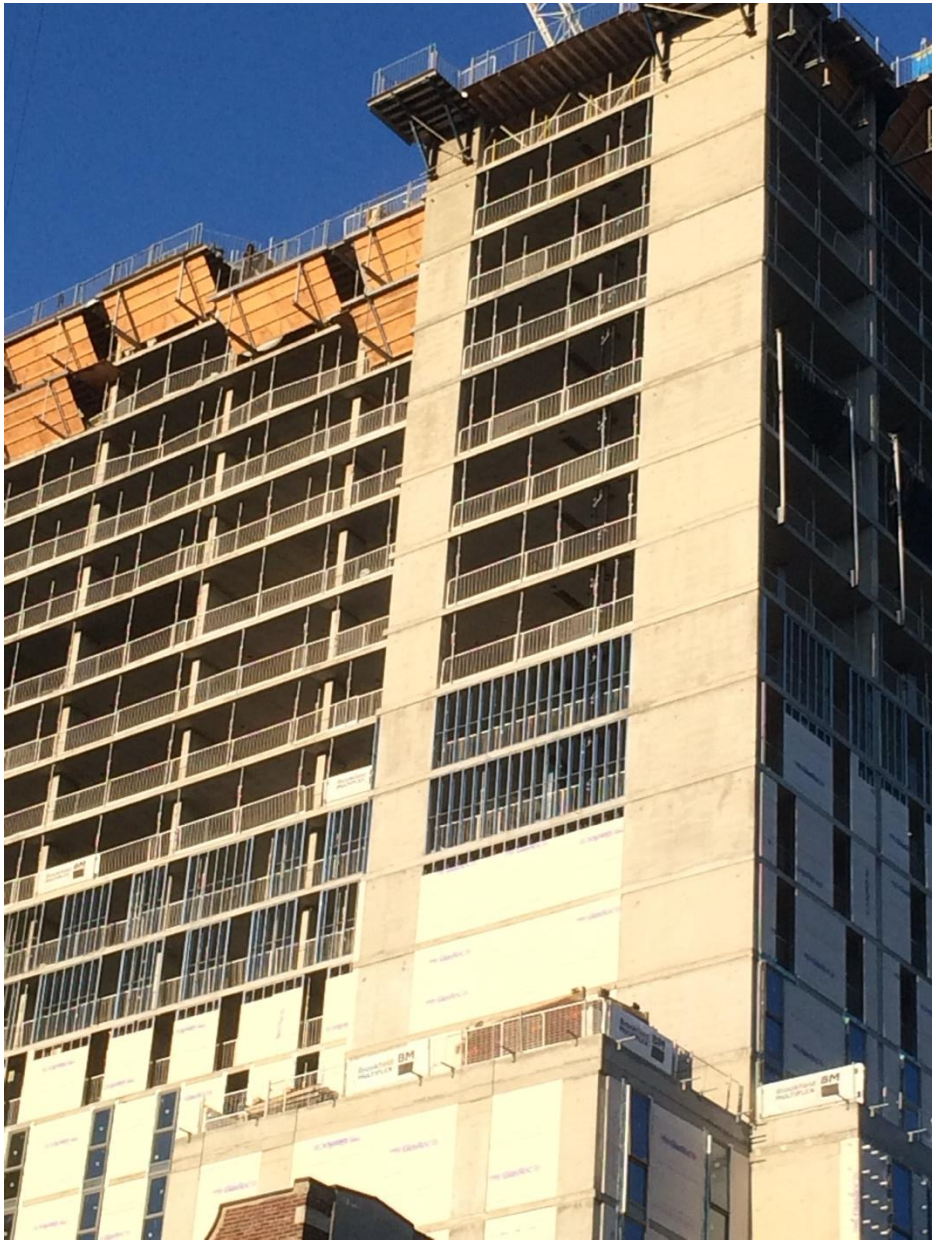


Tribute
Parking
FOR LEASE
WALK-IN CLINIC


Tribute
Tribute
Tribute


SkyTEC

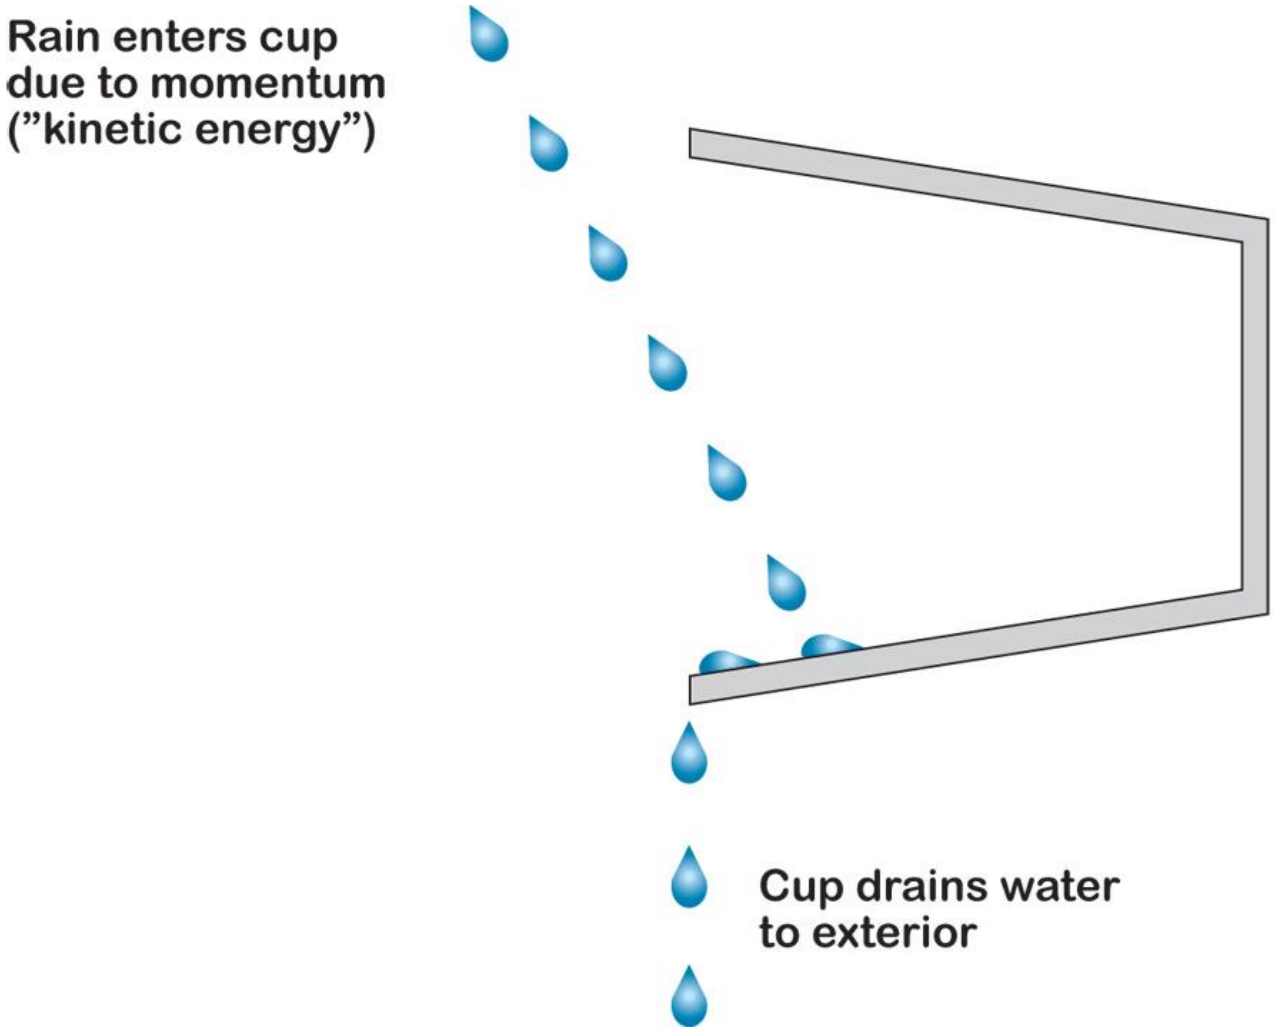
Rain enters cup due to momentum ("kinetic energy")
Cup drains water to exterior

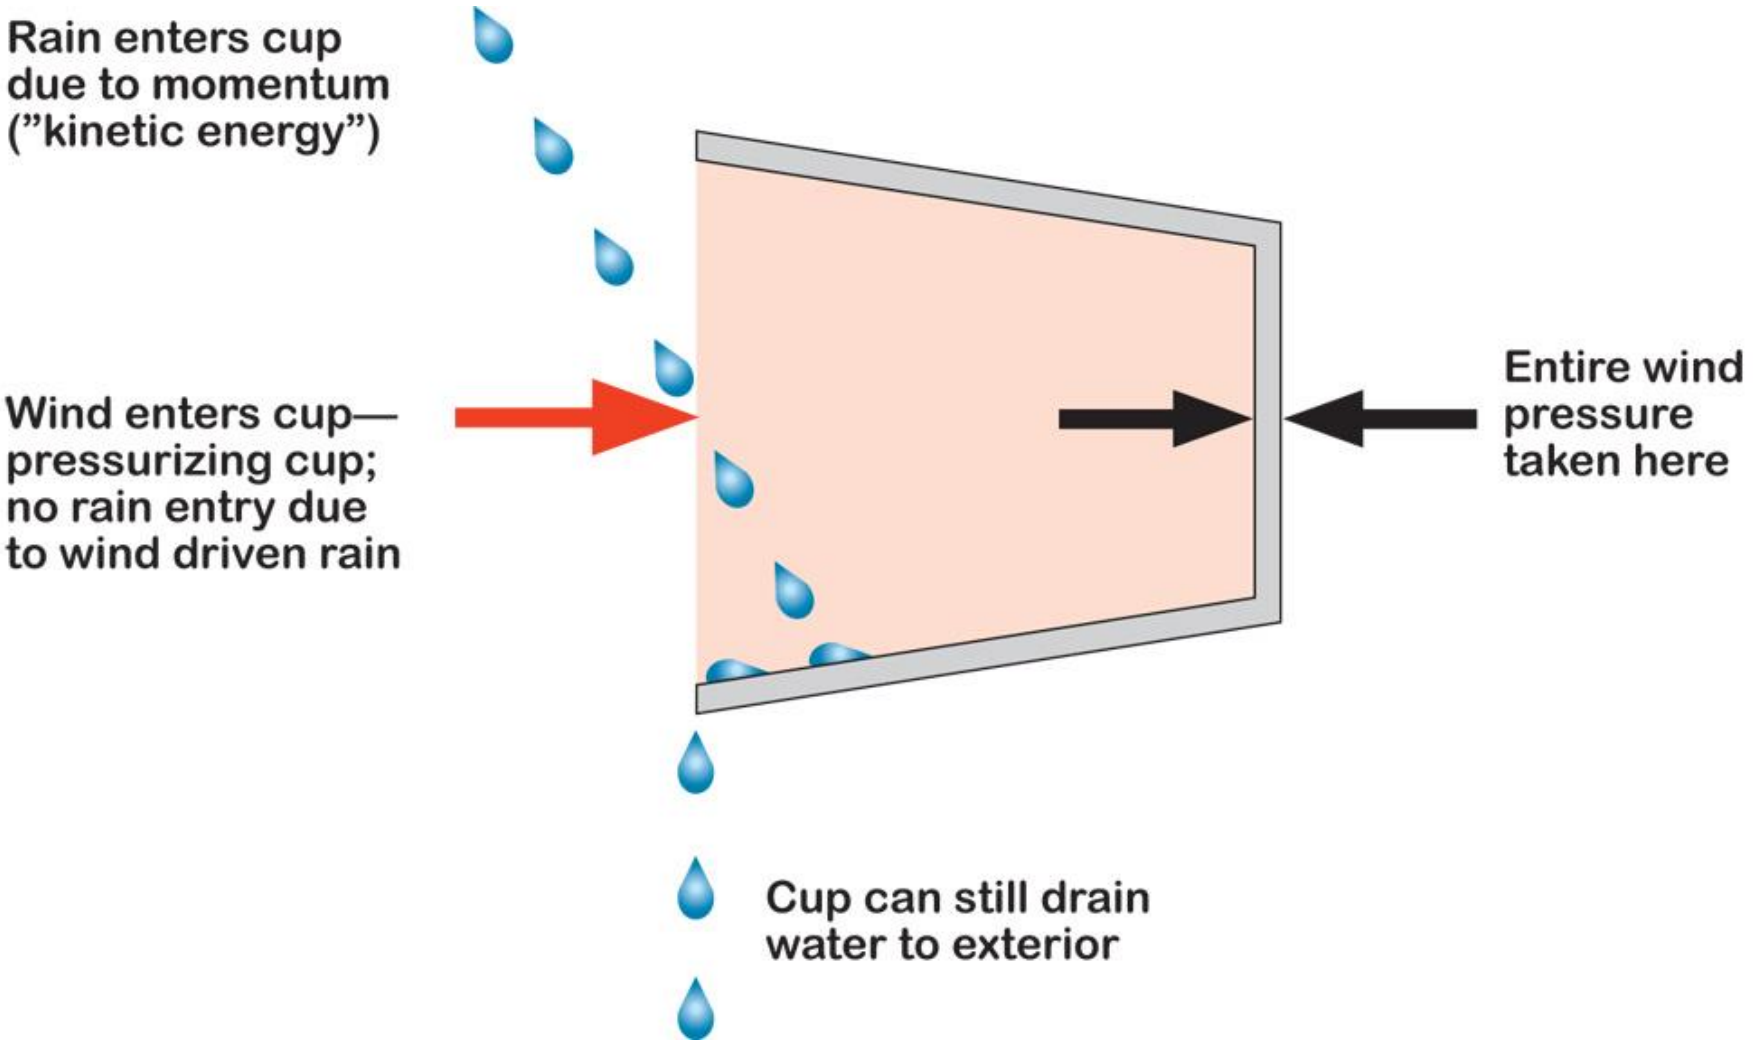
Rain enters cup due to momentum ("kinetic energy")
Wind enters cup— pressurizing cup; no rain entry due to wind driven rain
Entire wind pressure taken here
Cup can still drain water to exterior

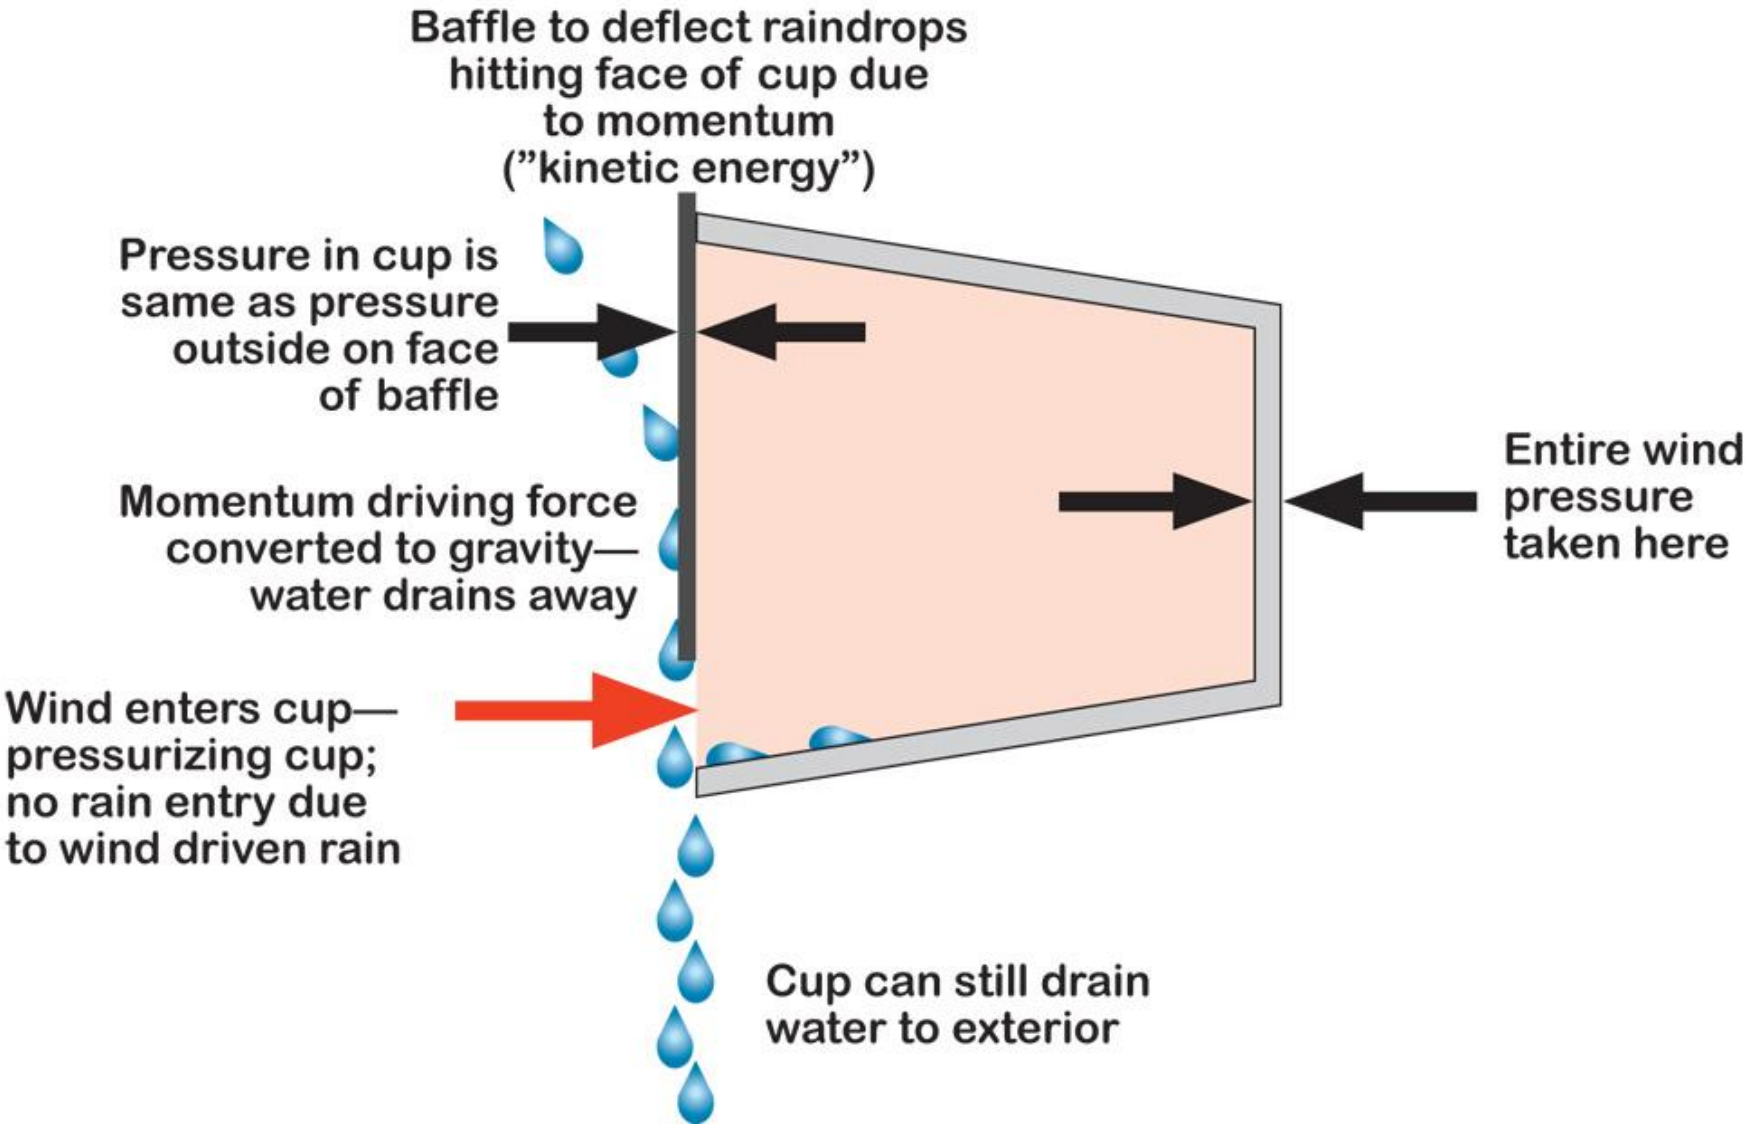
Baffle to deflect raindrops hitting face of cup due to momentum ("kinetic energy")
Pressure in cup is same as pressure outside on face of baffle
Momentum driving force converted to gravity— water drains away
Wind enters cup— pressurizing cup; no rain entry due to wind driven rain
Entire wind pressure taken here
Cup can still drain water to exterior

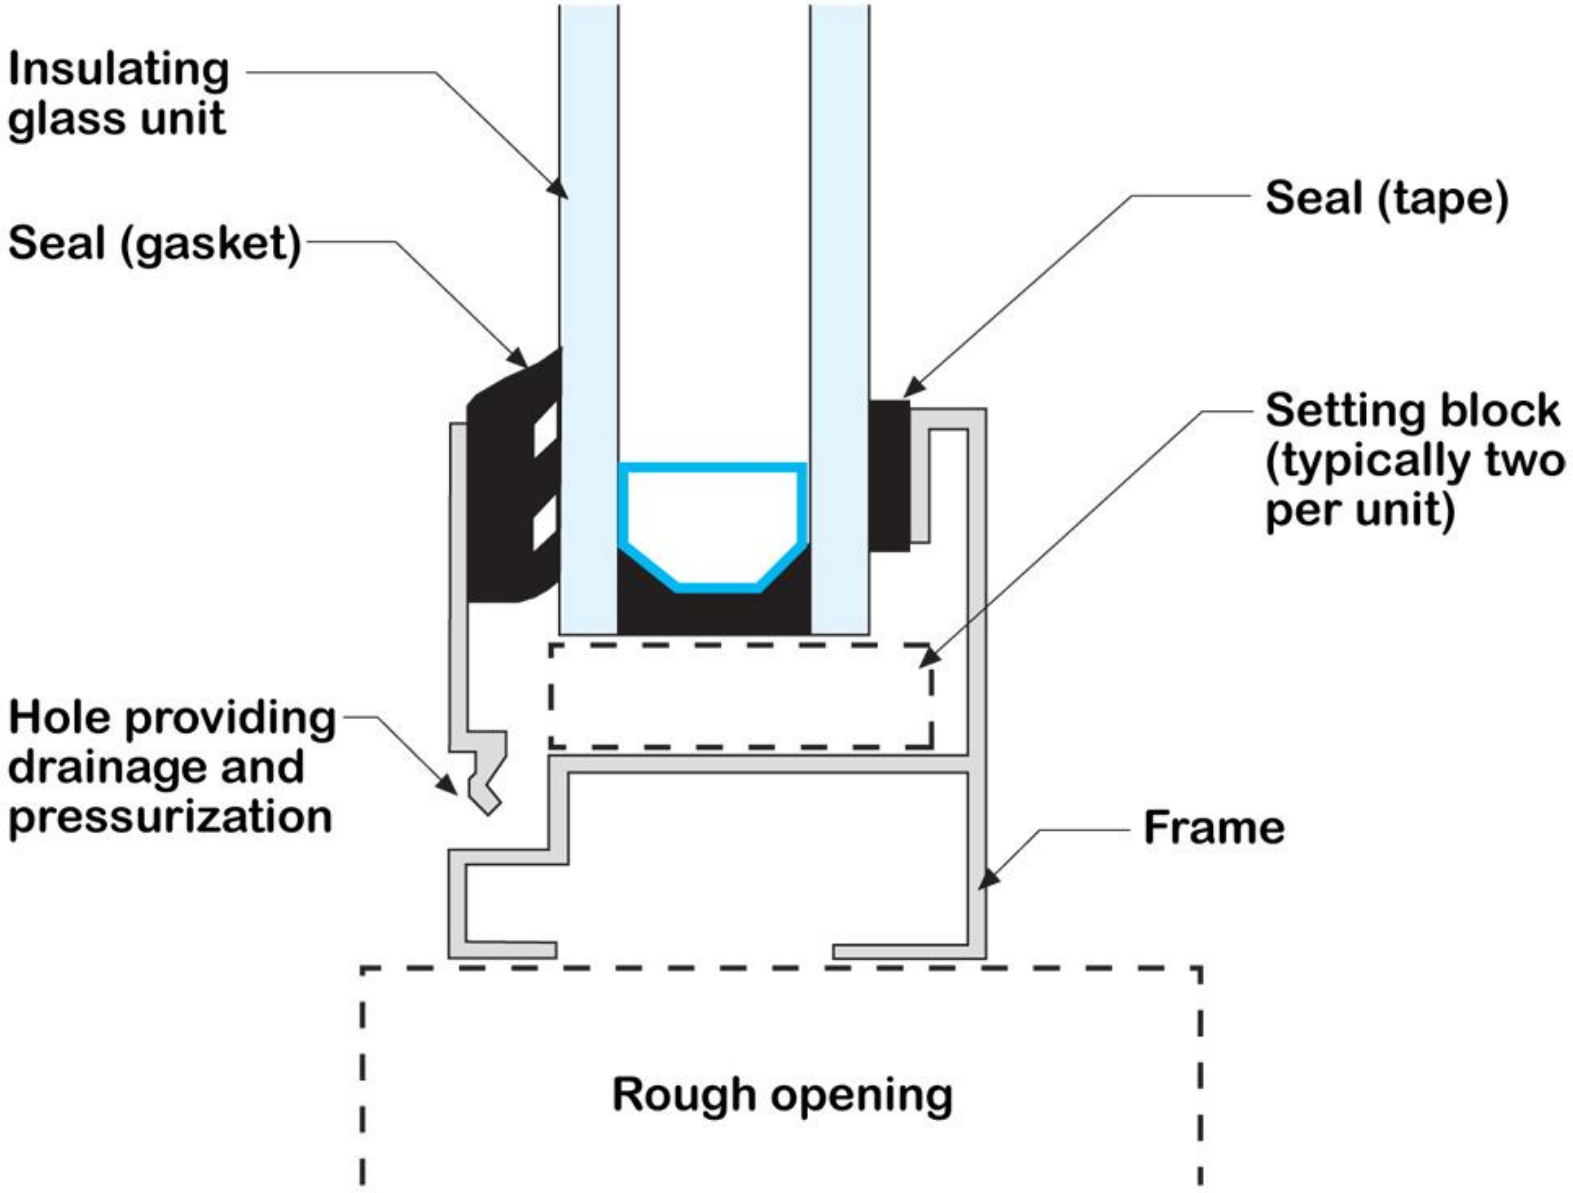
Insulating glass unit
Seal (gasket)
Seal (tape)
Setting block (typically two per unit)
Hole providing drainage and pressurization
Frame
Rough opening

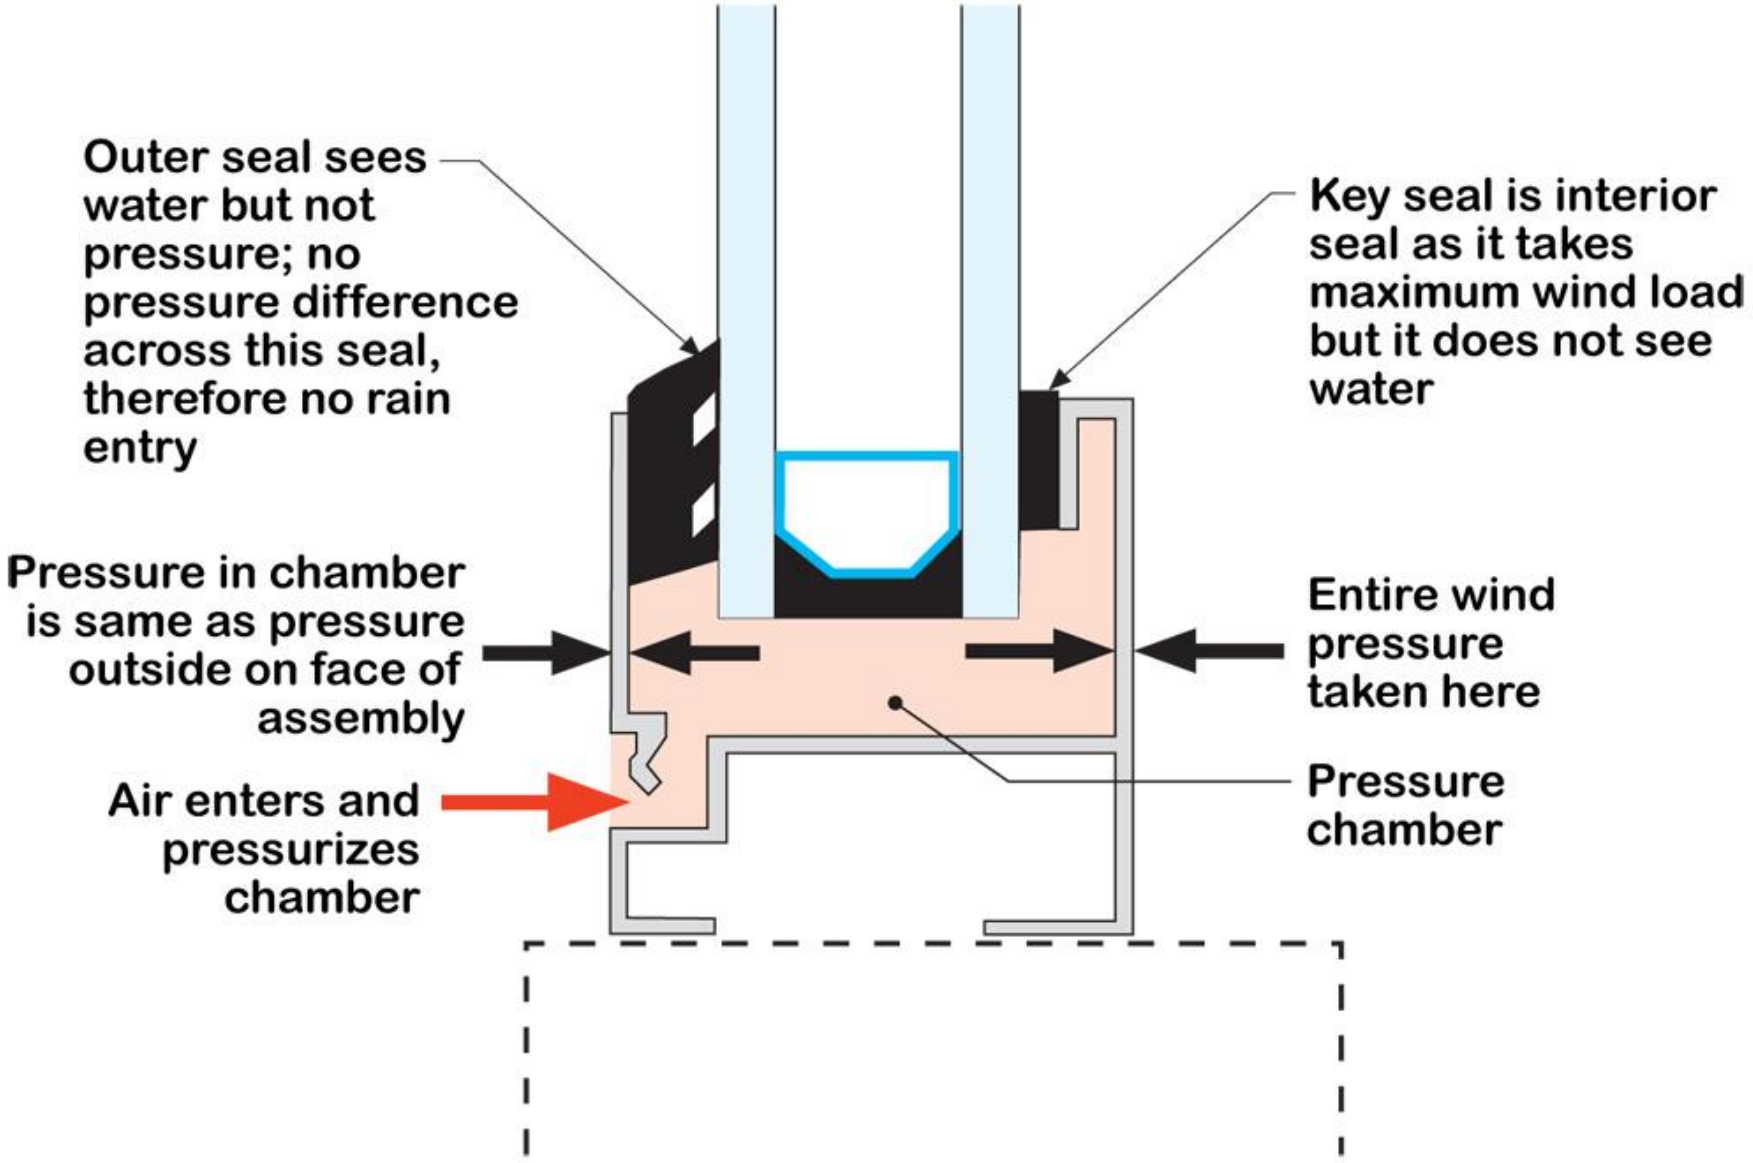
Outer seal sees water but not pressure; no pressure difference across this seal, therefore no rain entry
Key seal is interior seal as it takes maximum wind load but it does not see water
Pressure in chamber is same as pressure outside on face of assembly
Entire wind pressure taken here
Air enters and pressurizes chamber
Pressure chamber

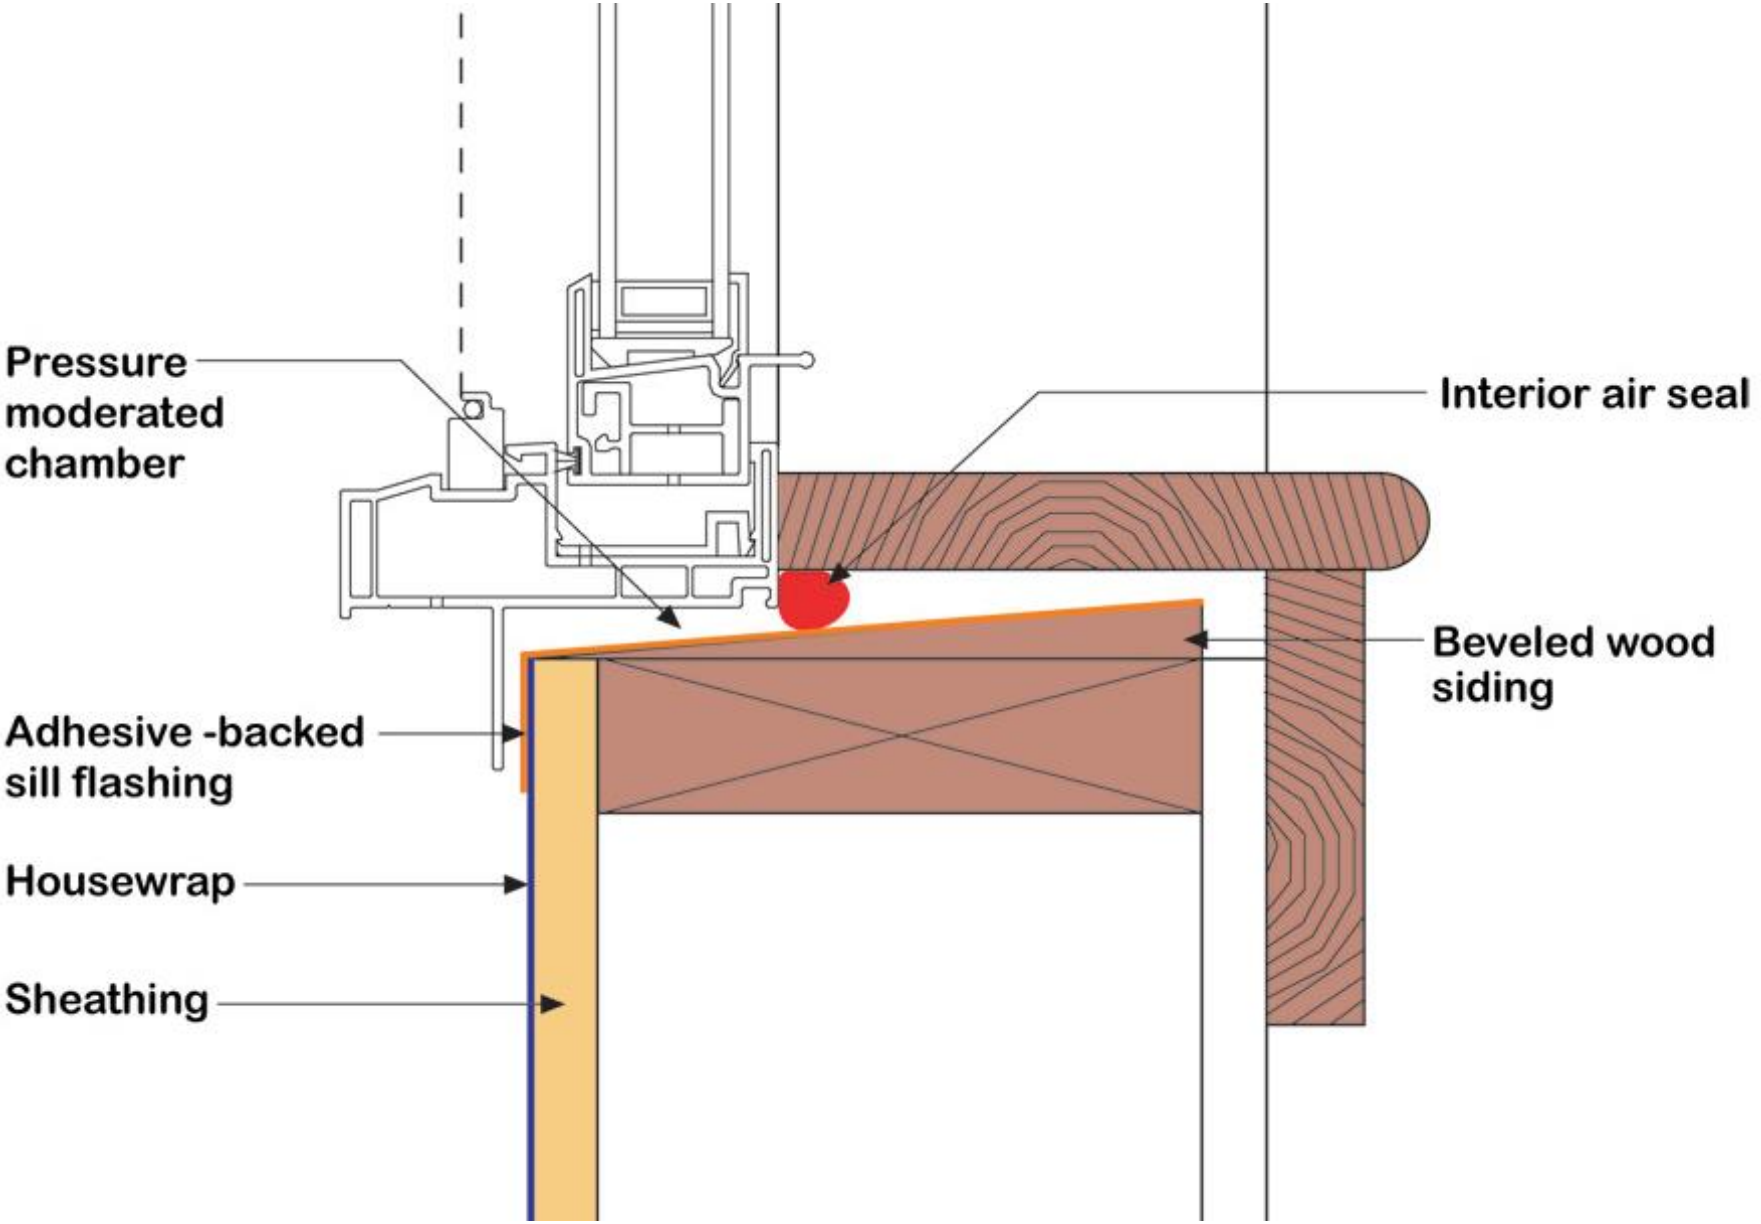
Pressure moderated chamber
Interior air seal
Beveled wood siding
Adhesive -backed sill flashing
Housewrap
Sheathing


DOW
Styrofoam

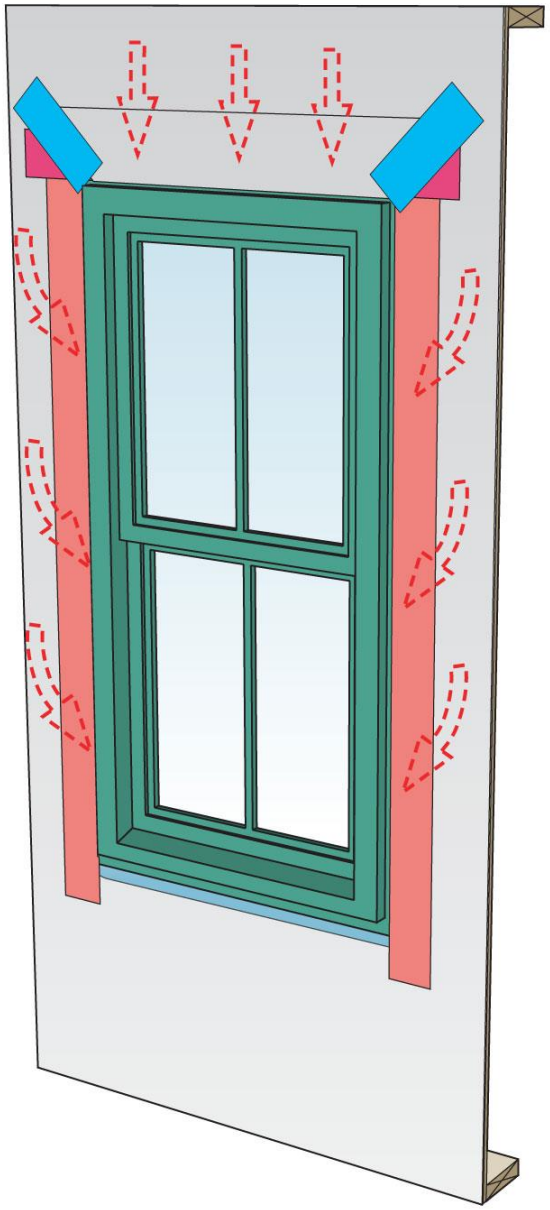

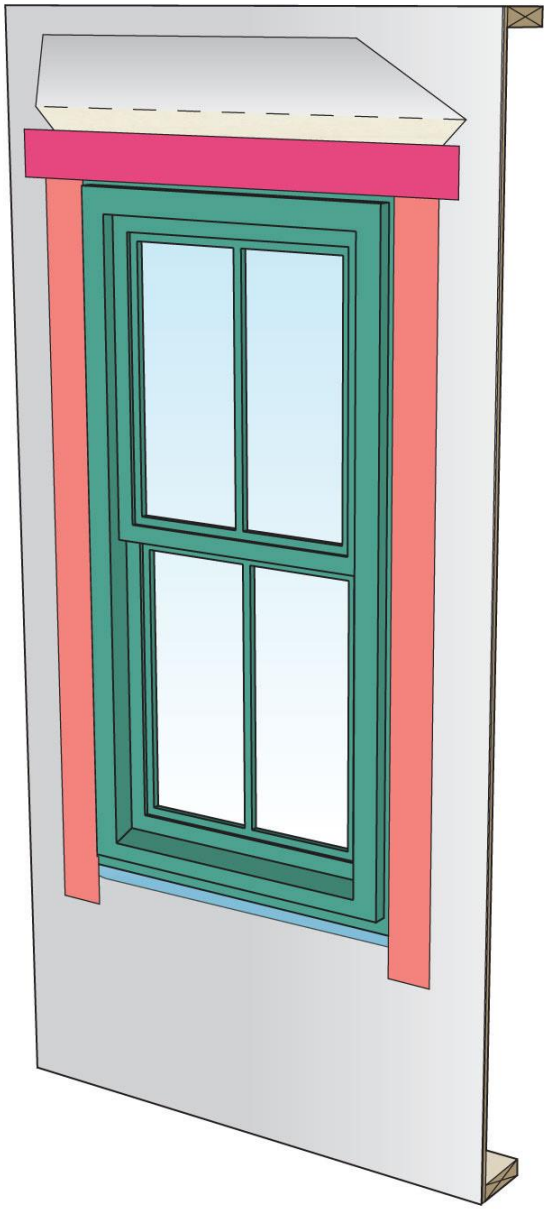

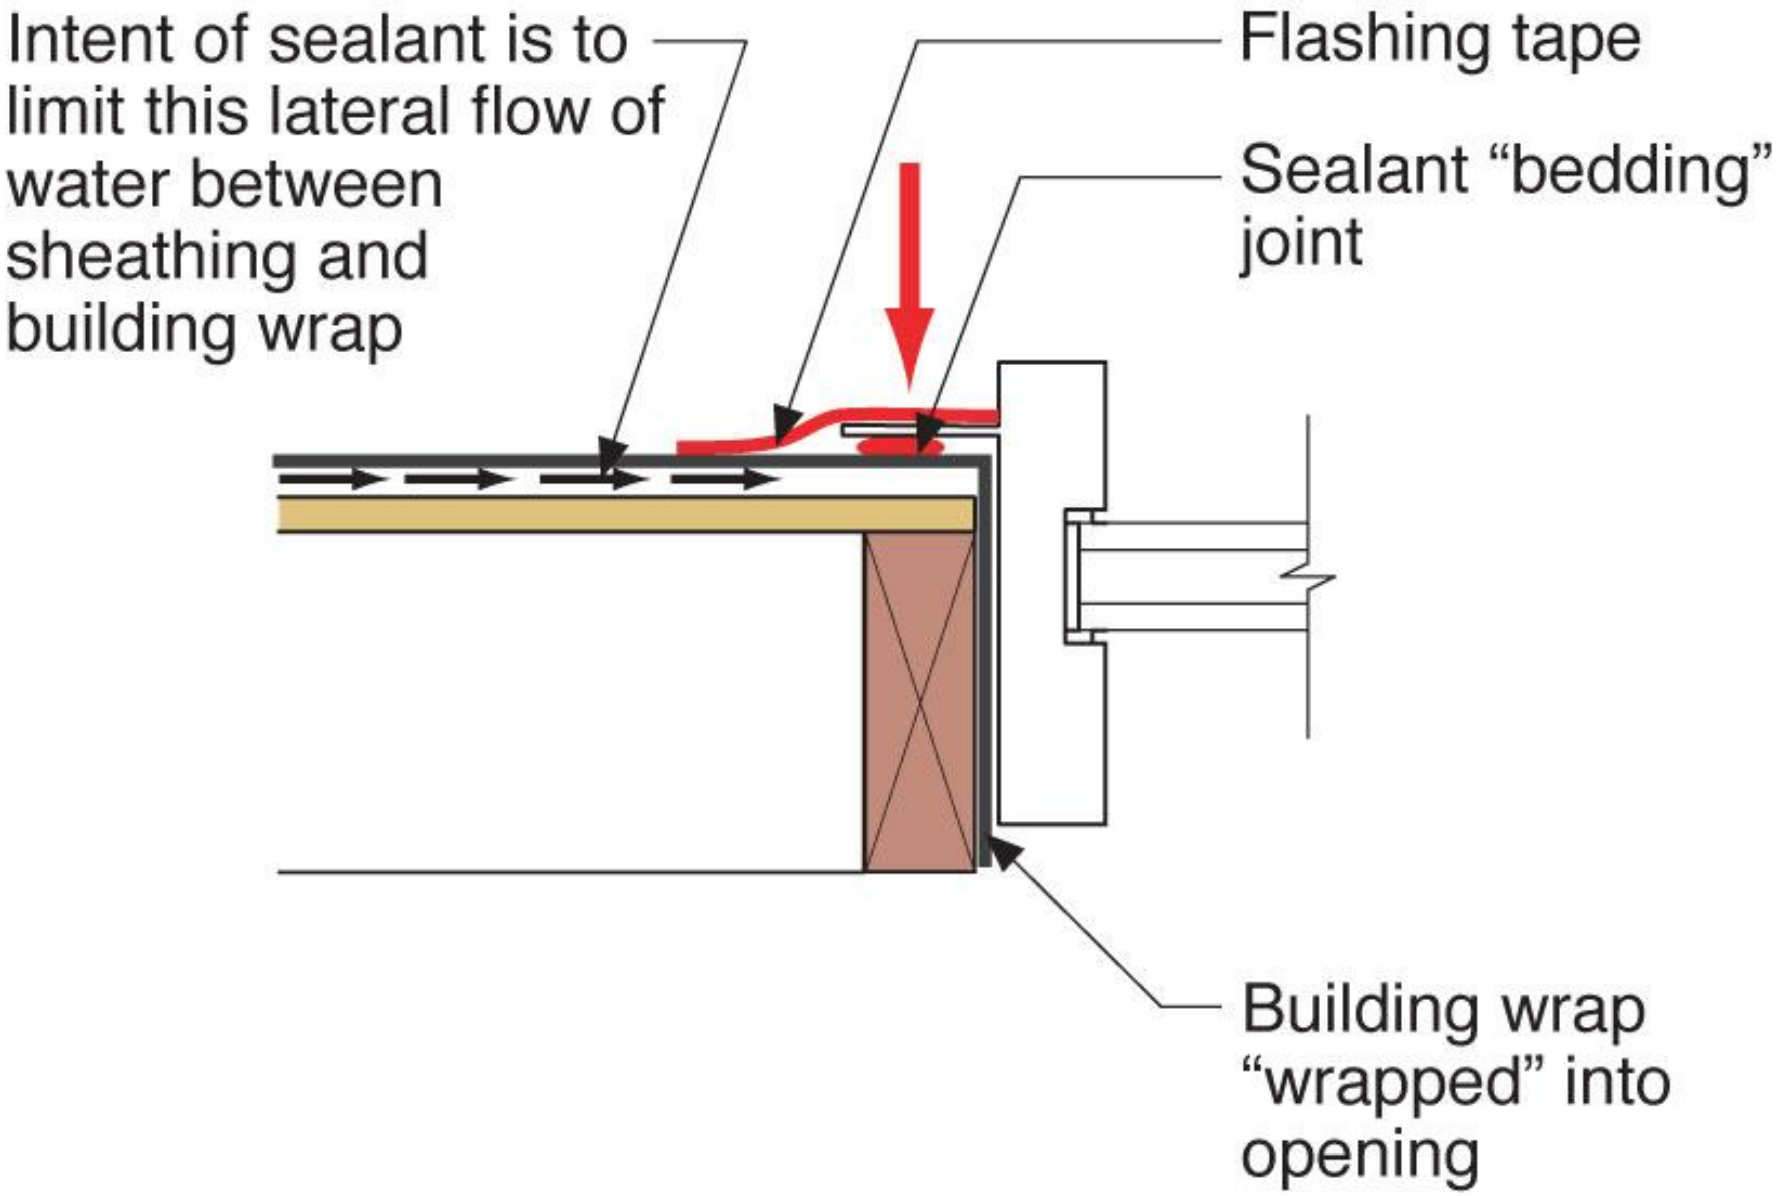
Intent of sealant is to limit this lateral flow of water between sheathing and building wrap
Flashing tape
Sealant "bedding" joint
Building wrap "wrapped" into opening

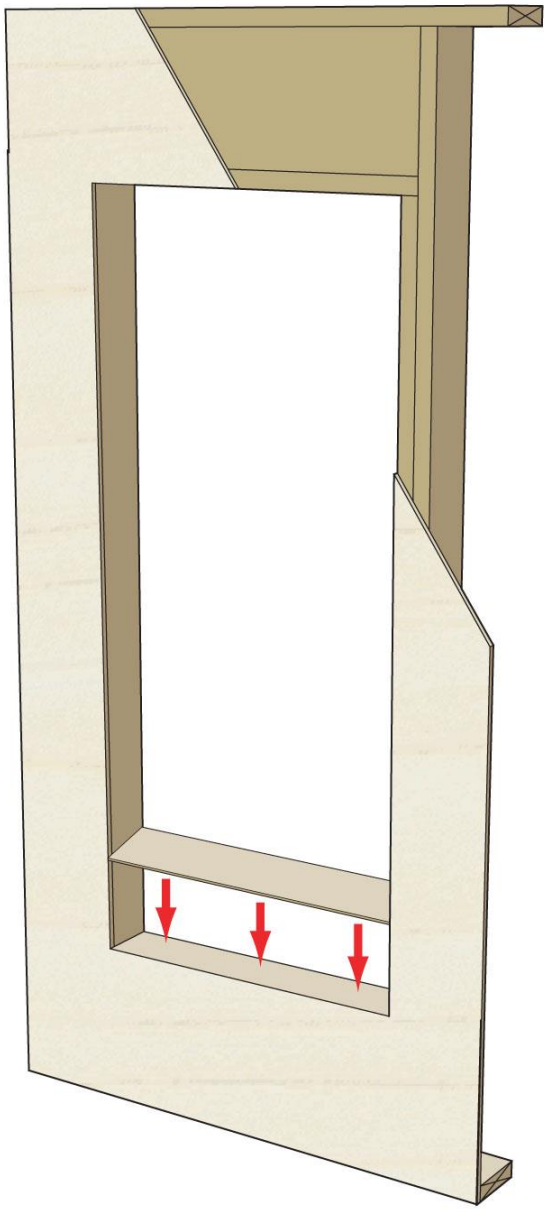

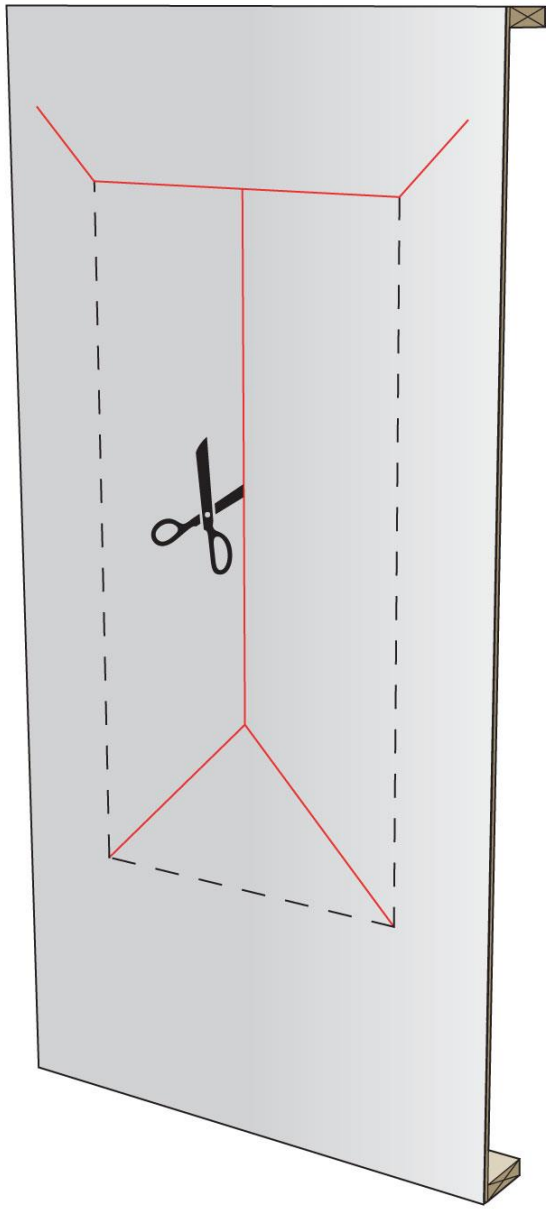

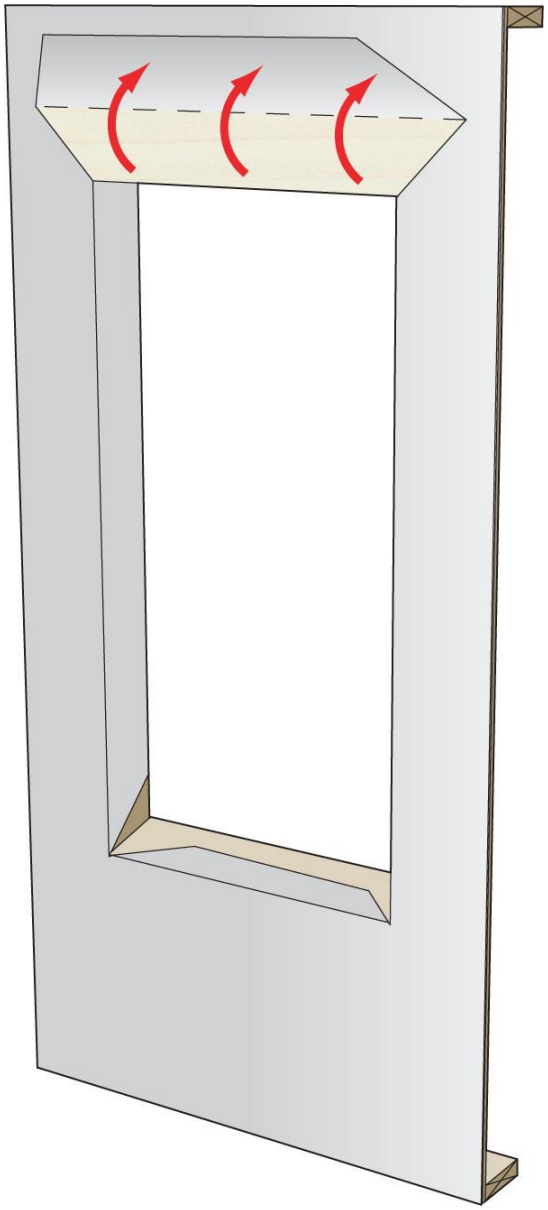

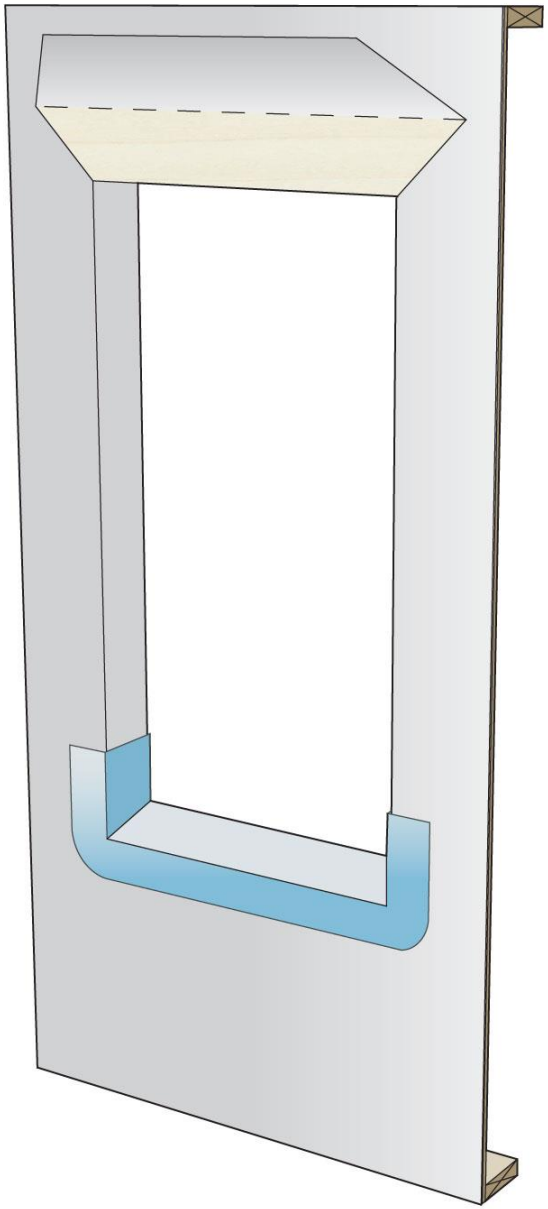

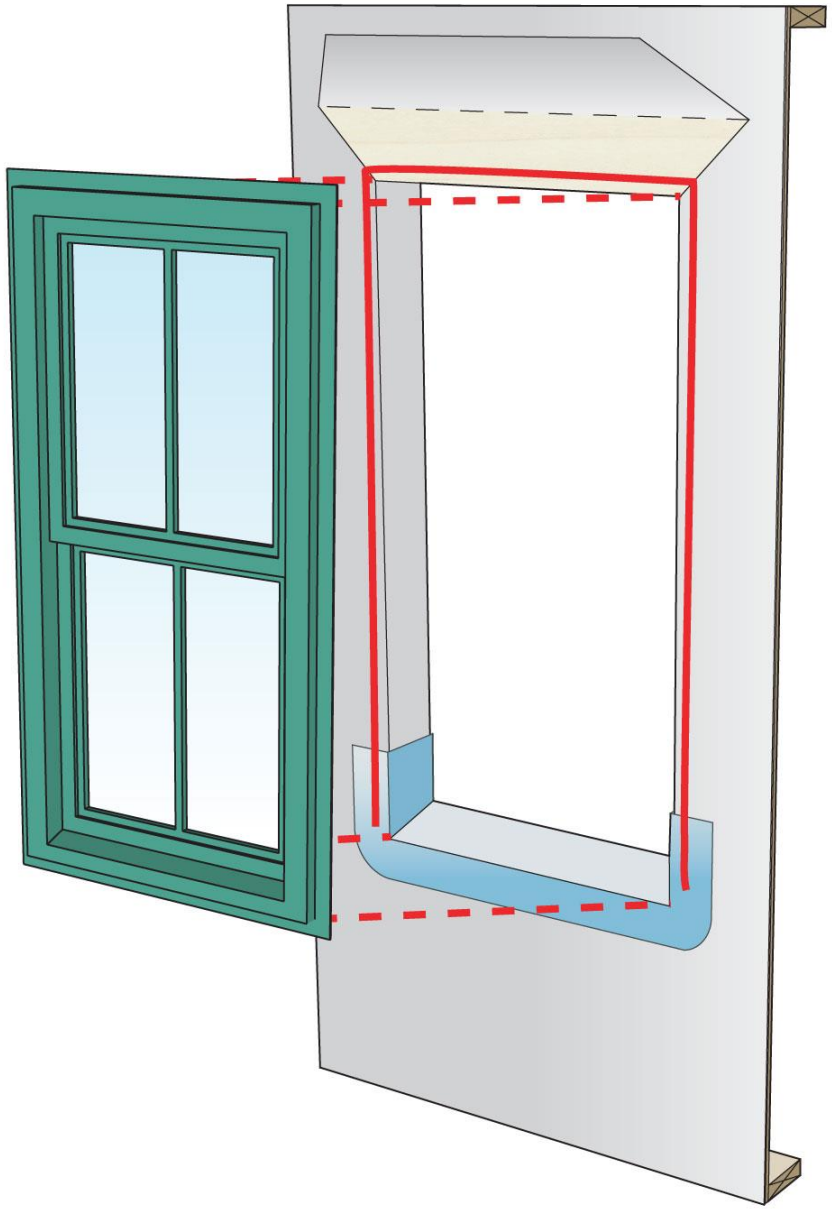

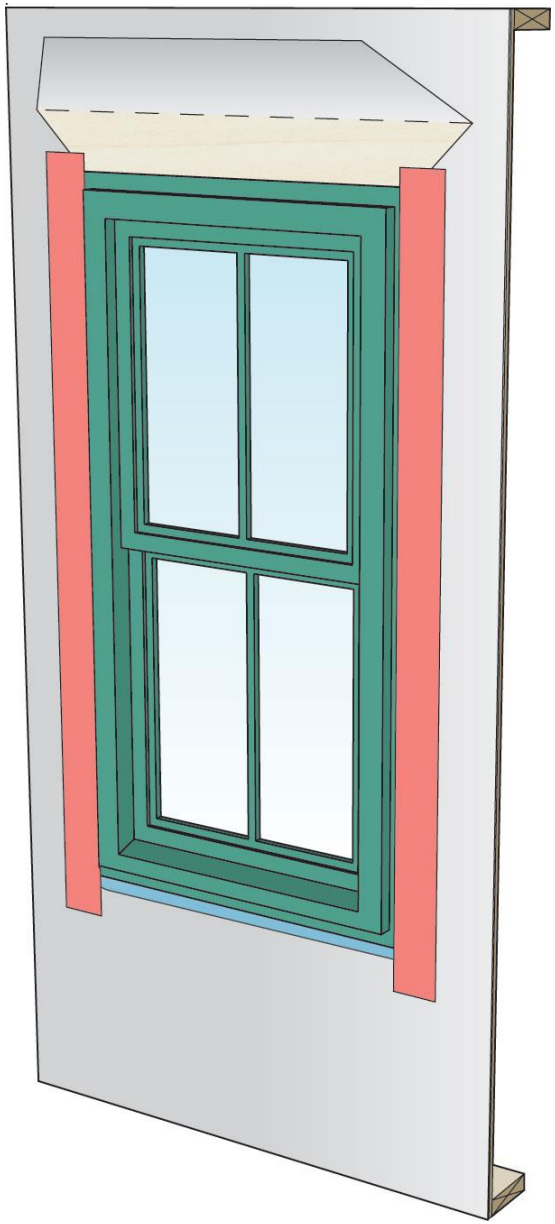

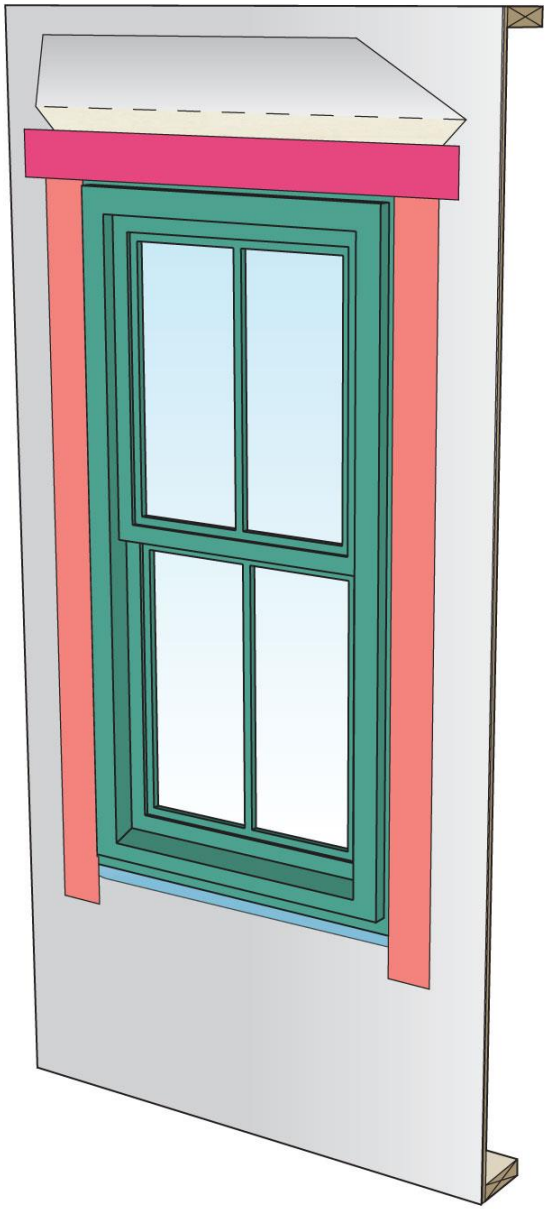

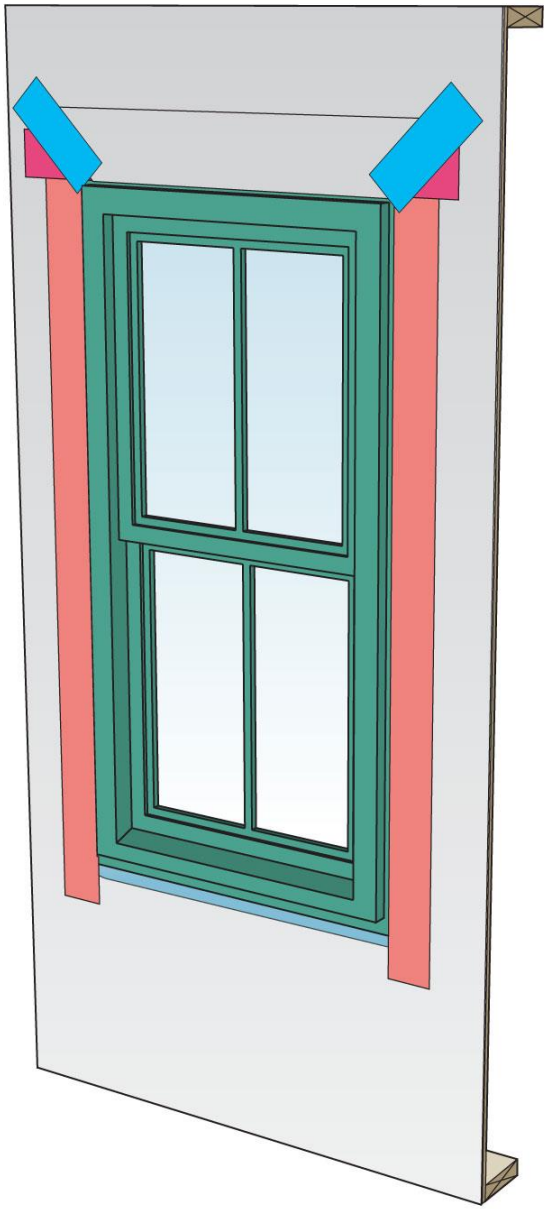

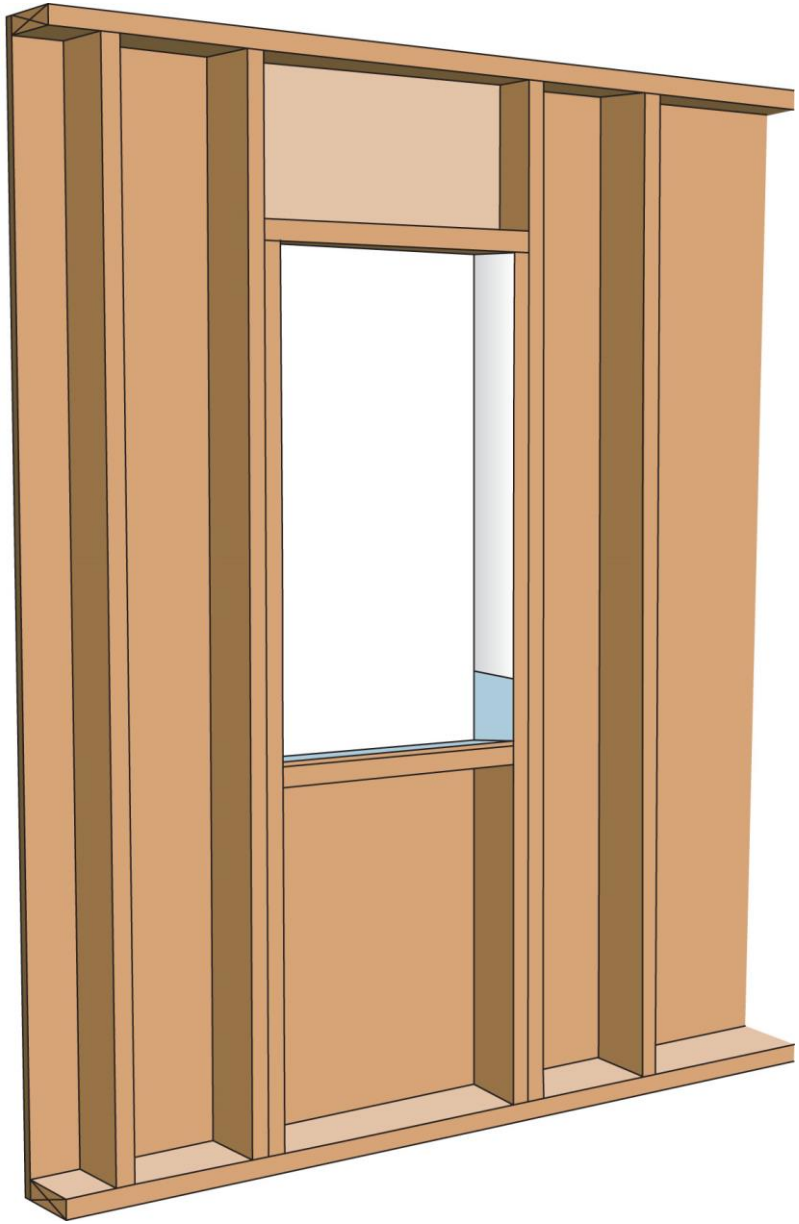

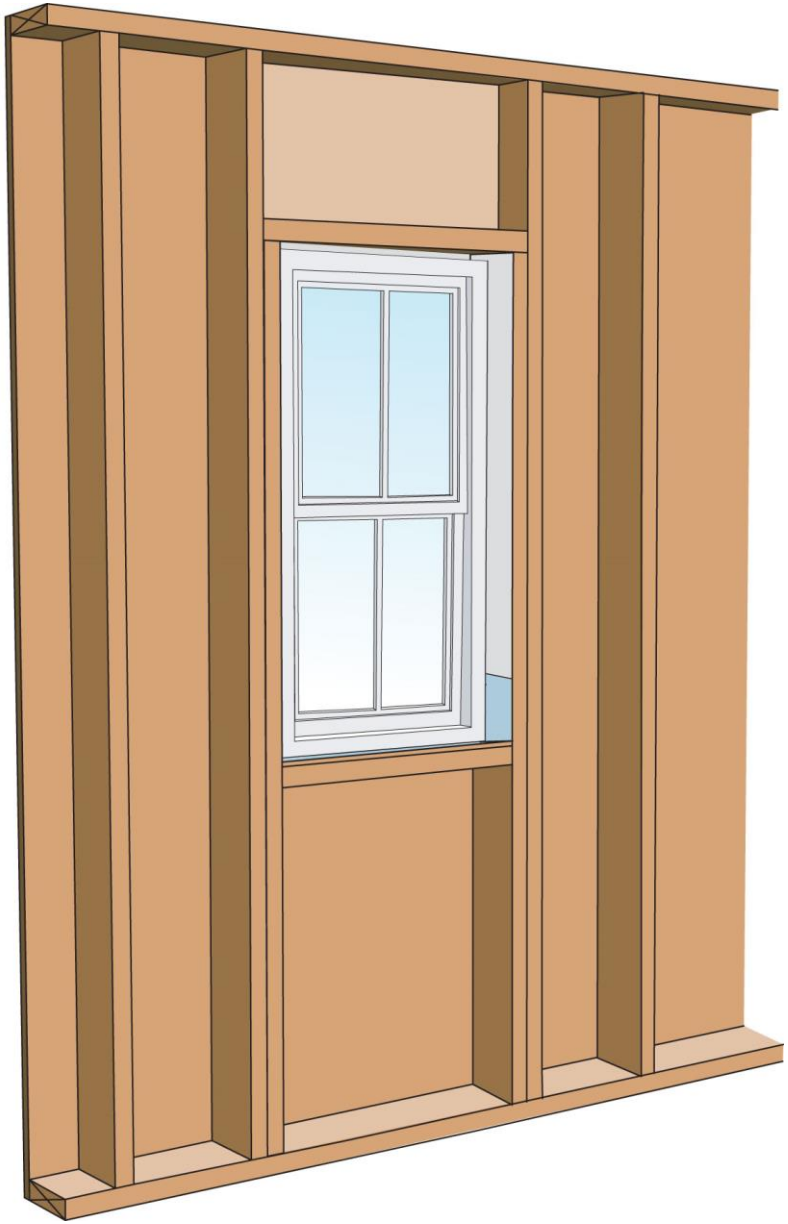


RCI
WARNING: DuPont™ Tyvek®
maintenance requirements
the wall system may impact
AVERTISSEMENT: Le matériau
allonges du fabricant pour ce
revêtement DuPont™ Tyvek®
stalled as an air barrier ac

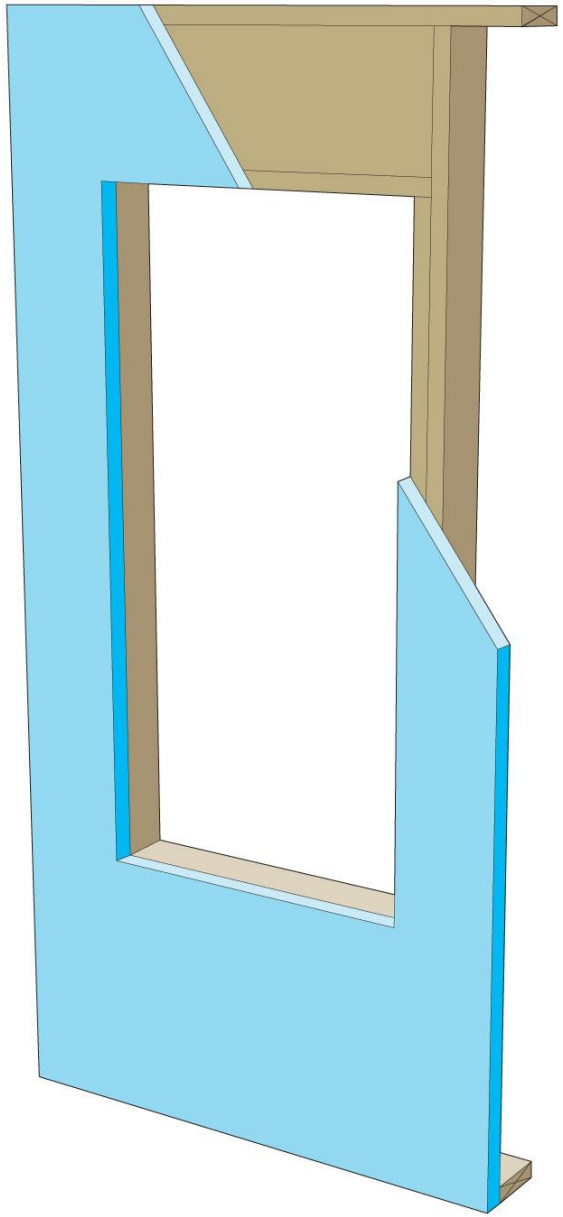

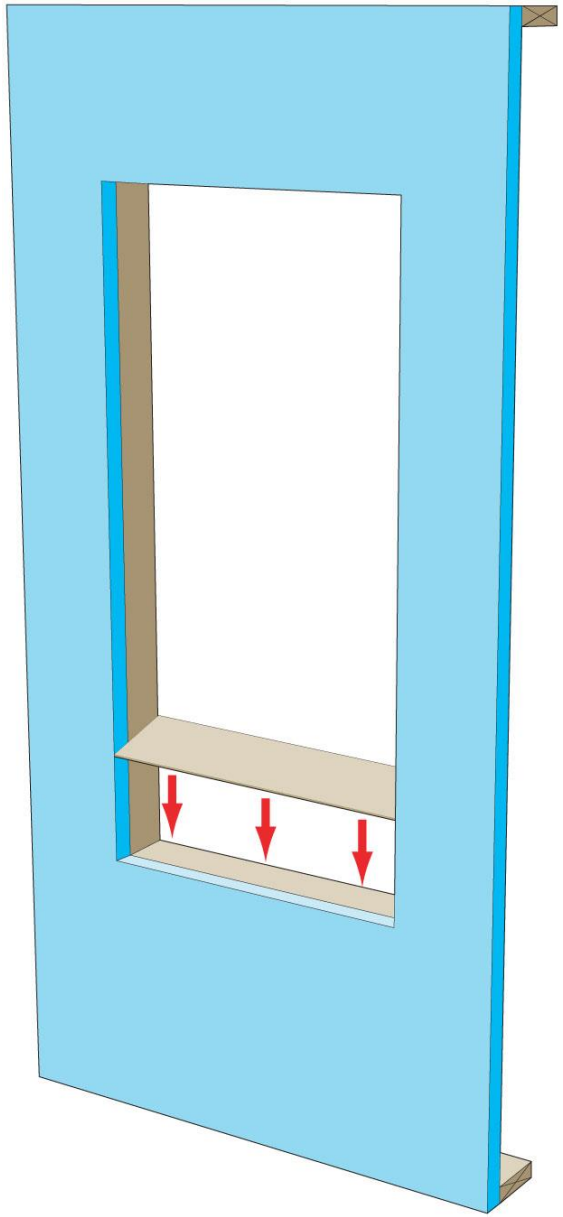

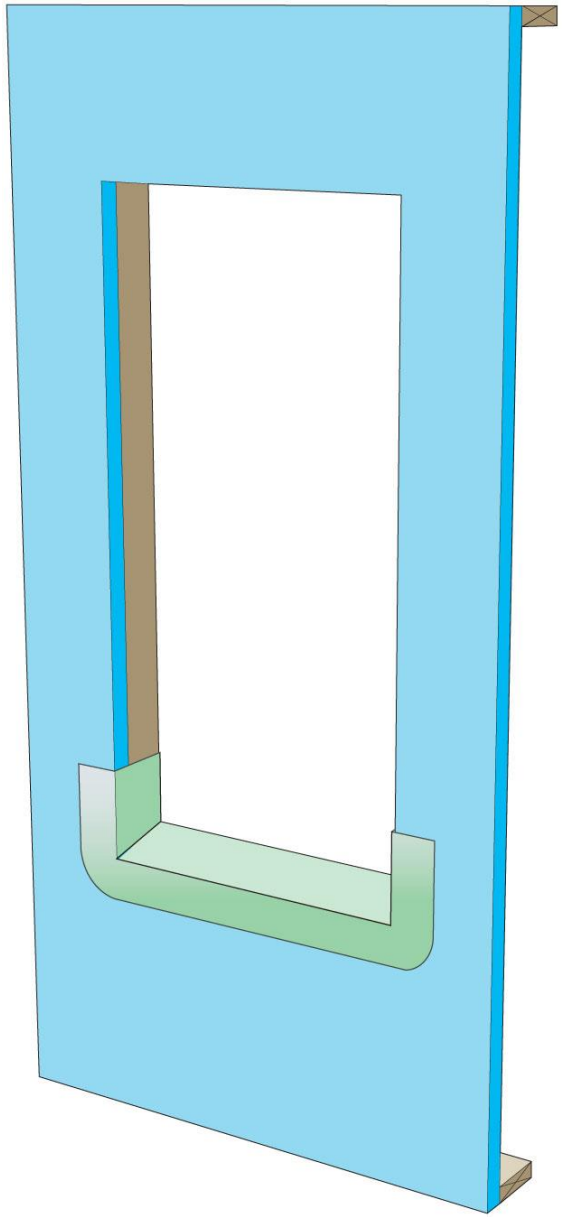

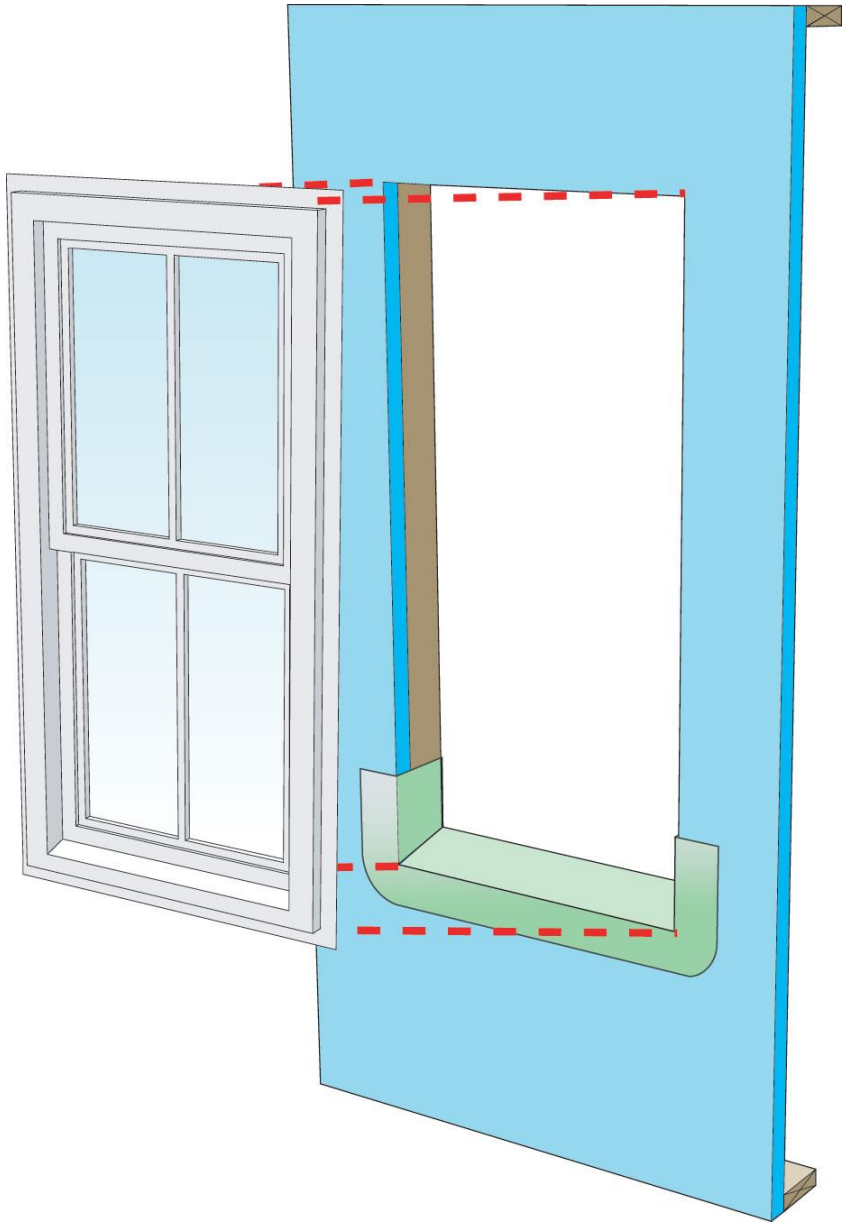

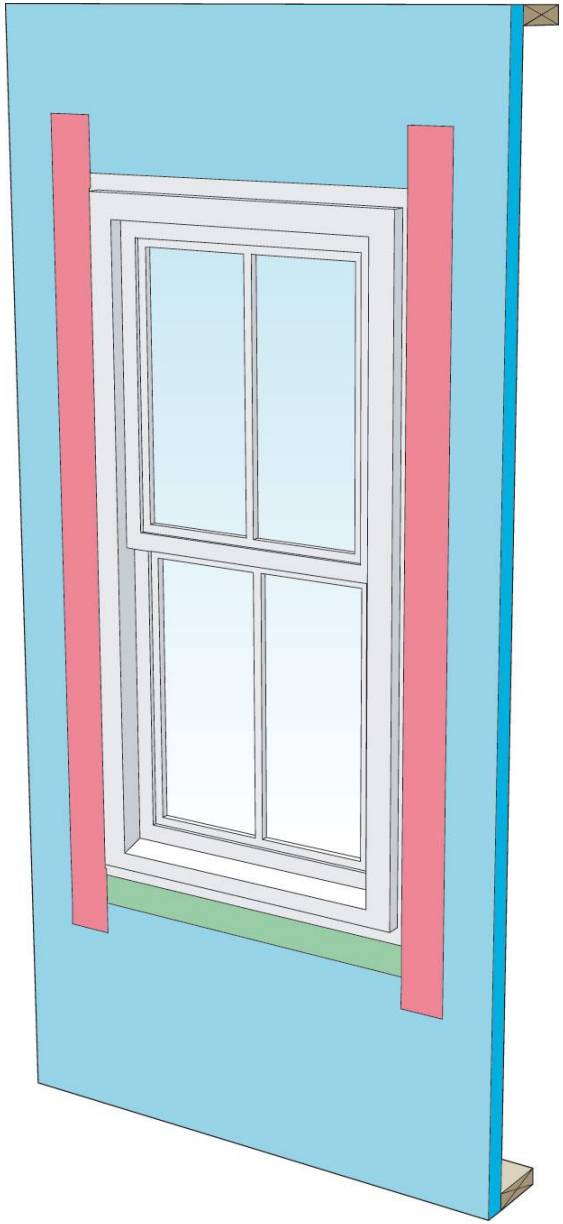

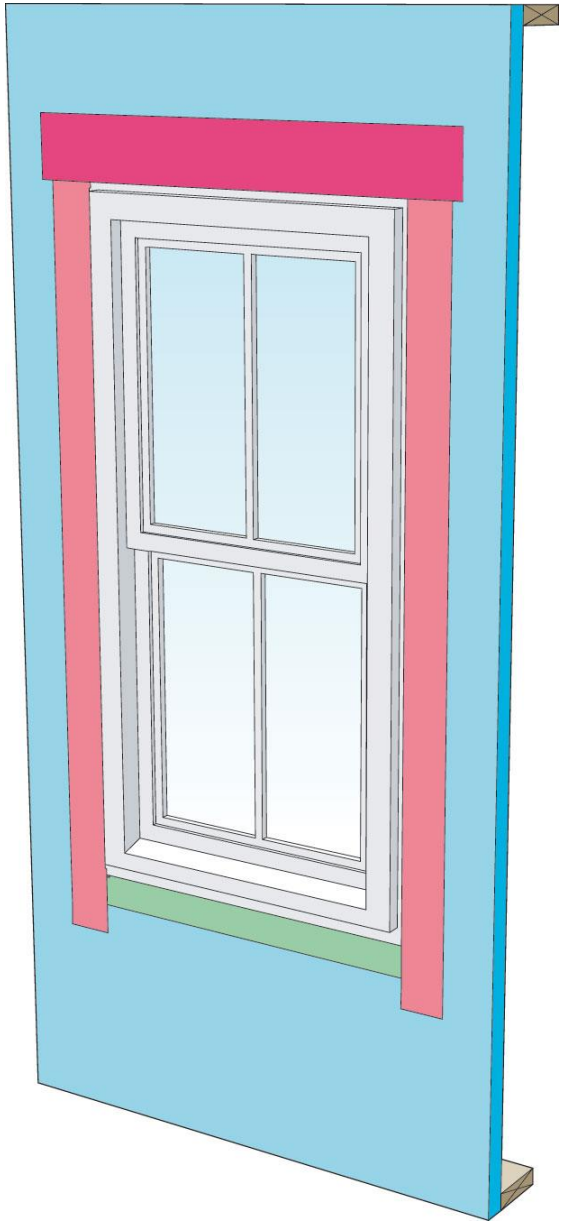

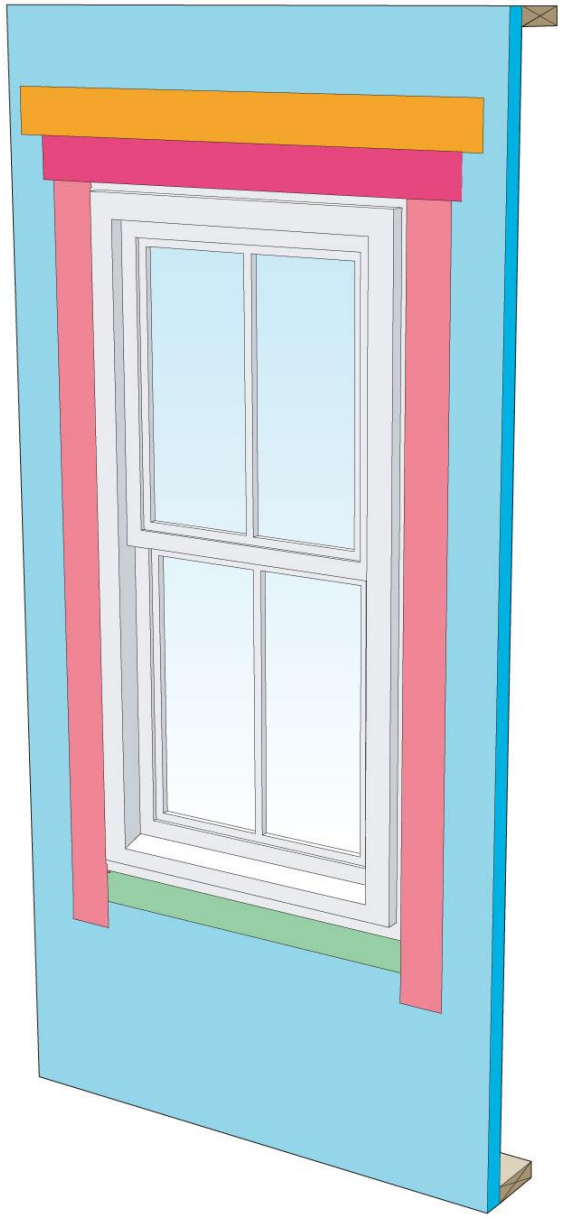

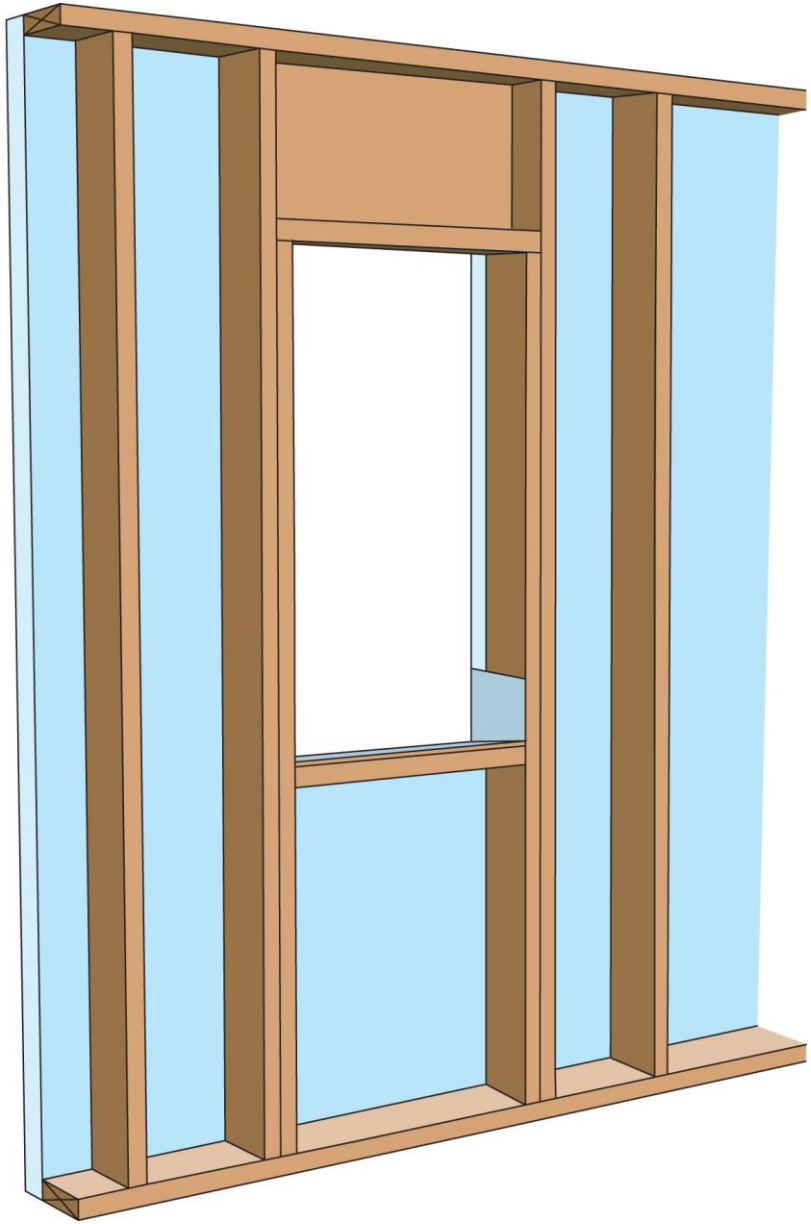

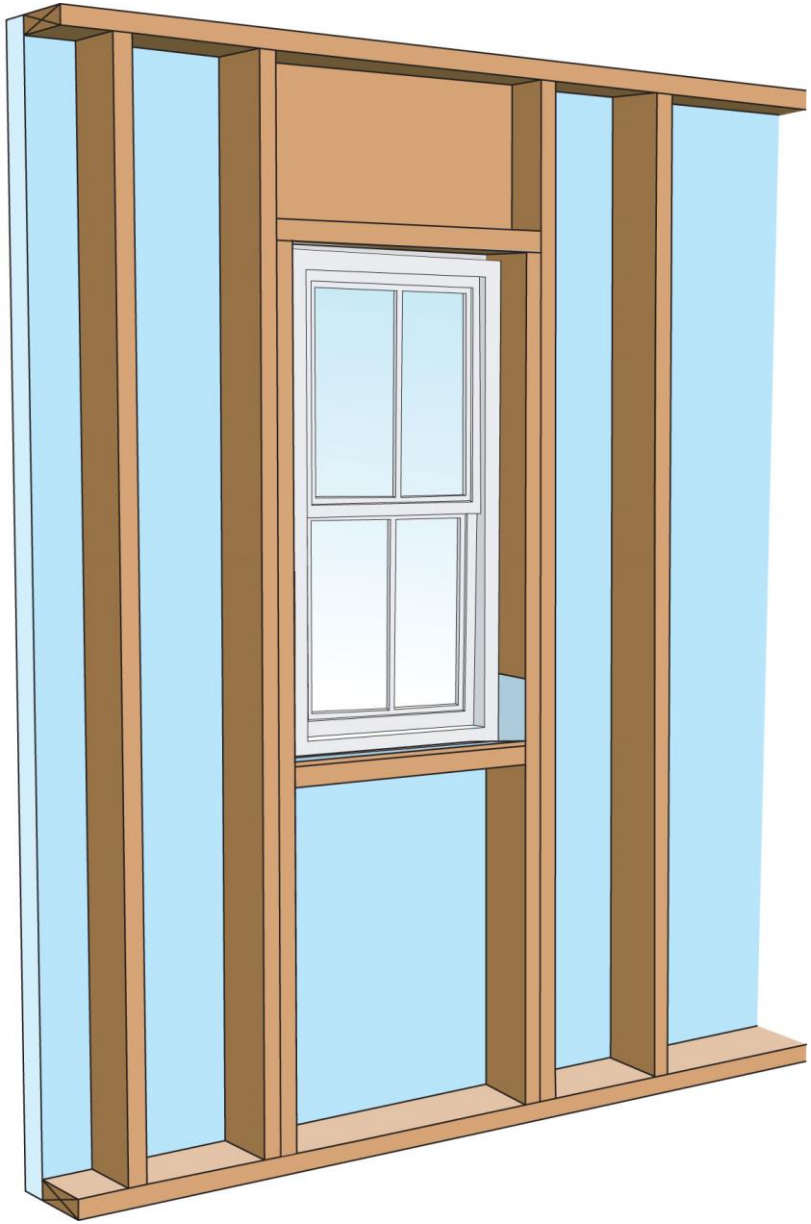

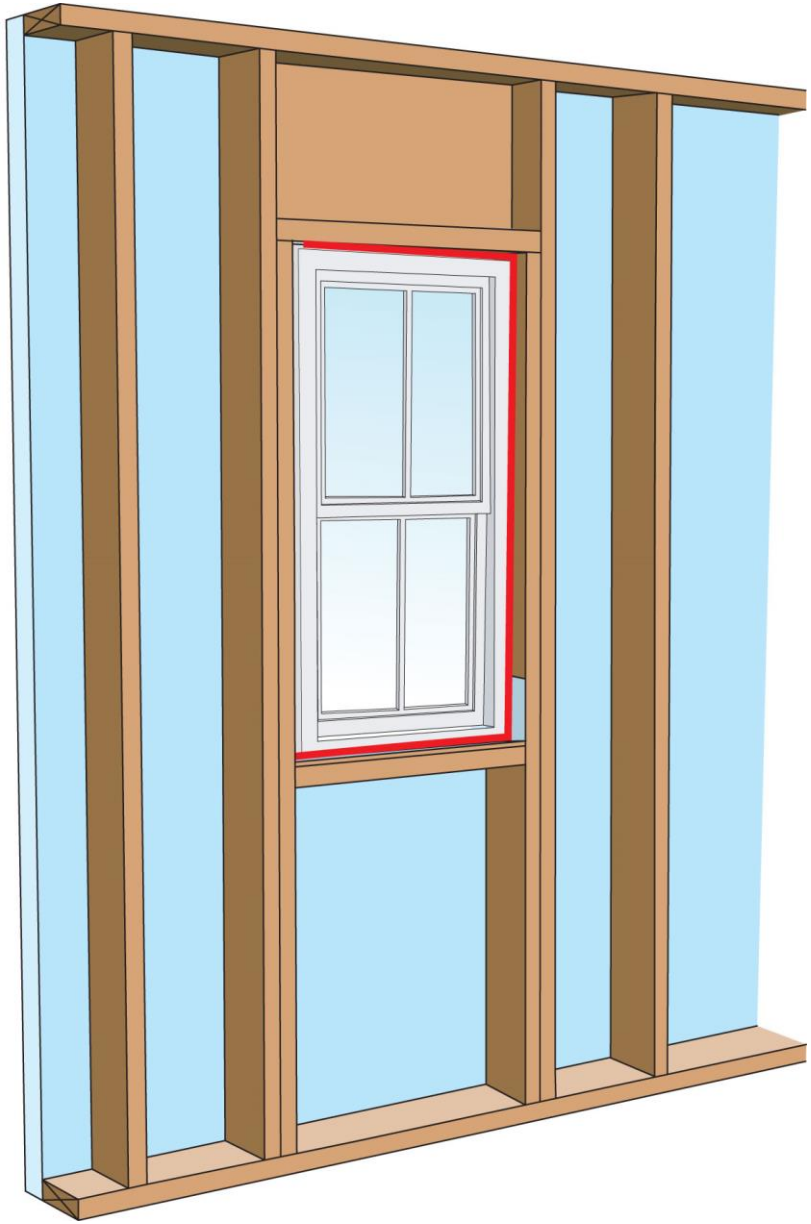


DERMACON

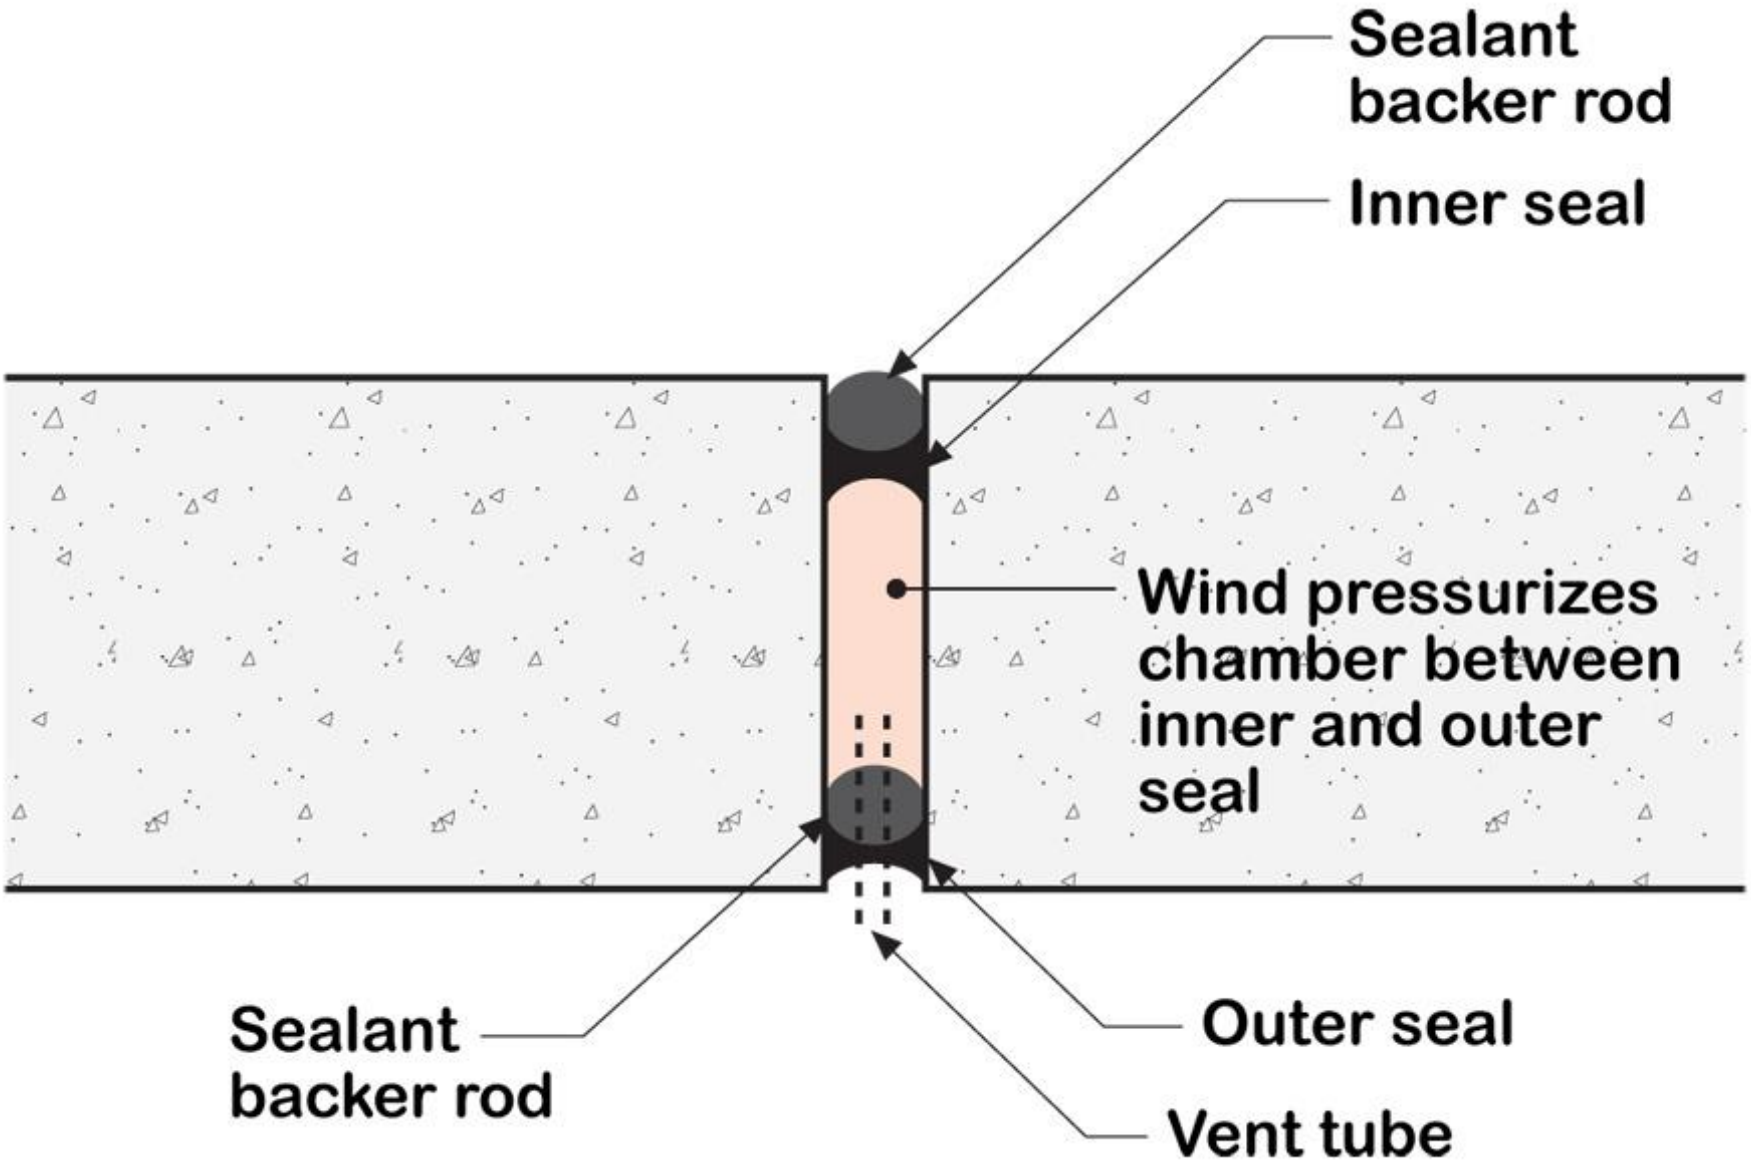
Sealant backer rod
Inner seal
Wind pressurizes chamber between inner and outer seal
Sealant backer rod
Outer seal
Vent tube

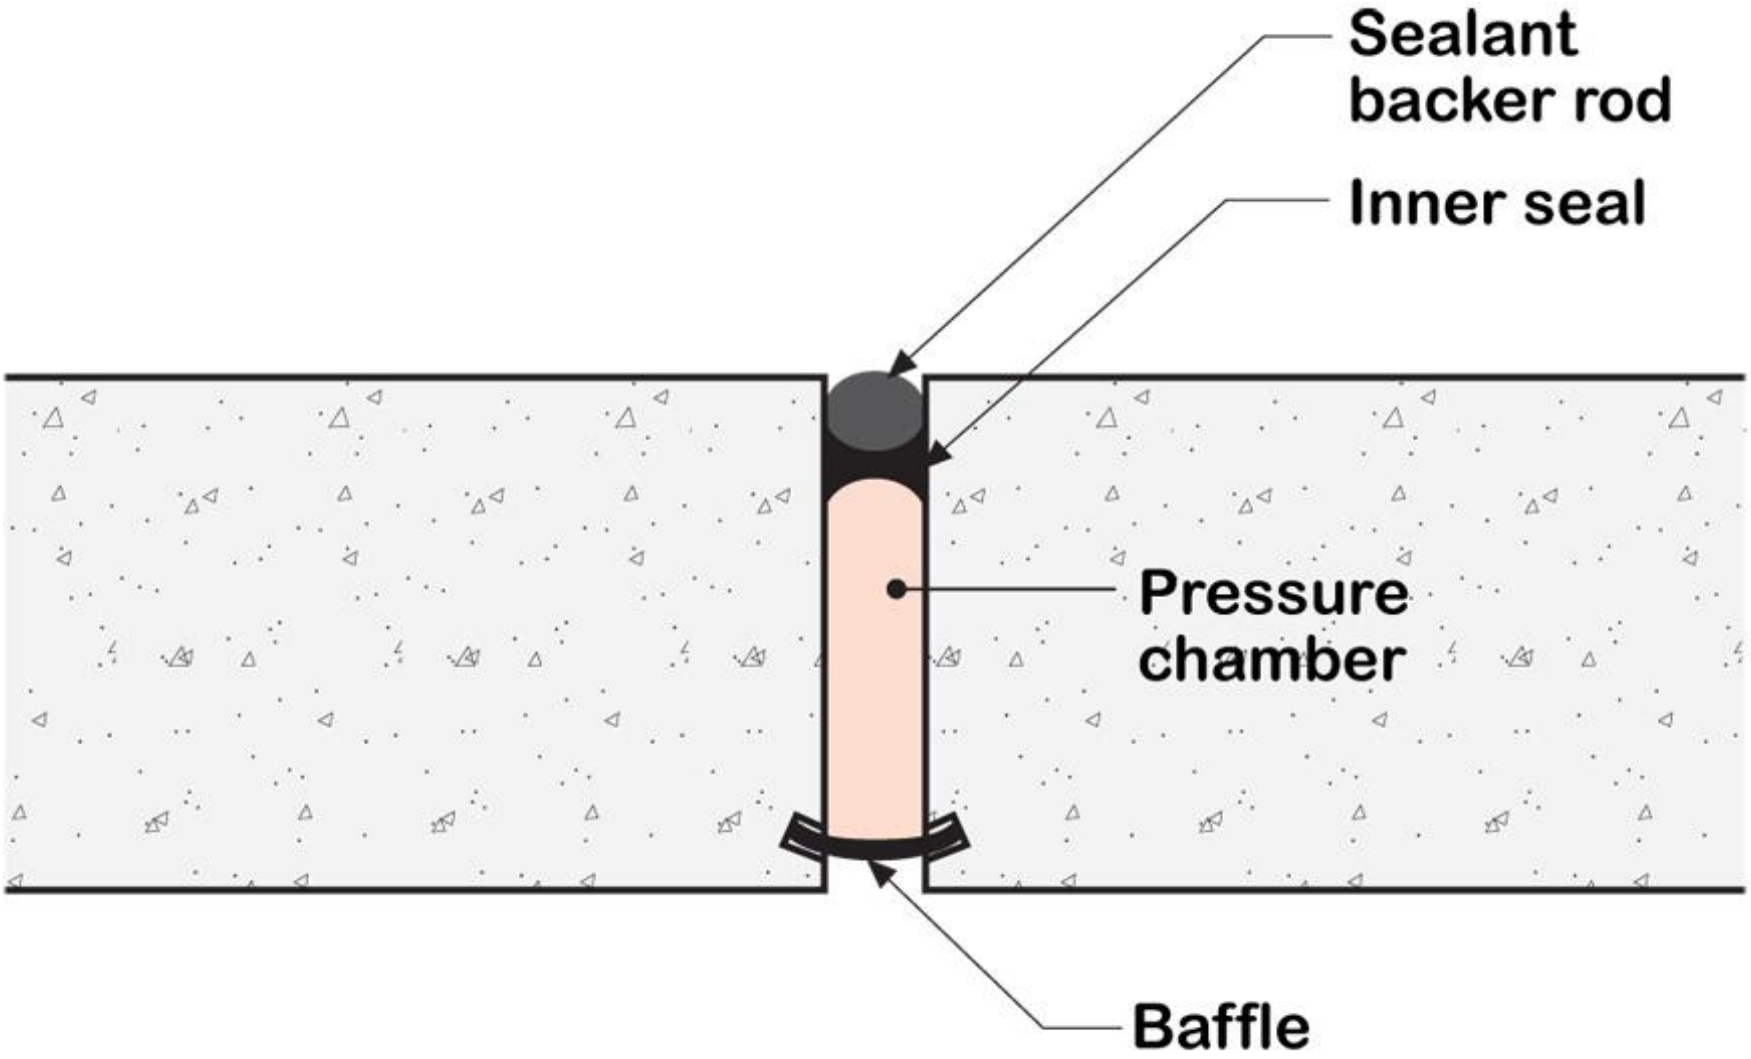
Sealant
backer rod
Inner seal
Pressure
chamber
Baffle

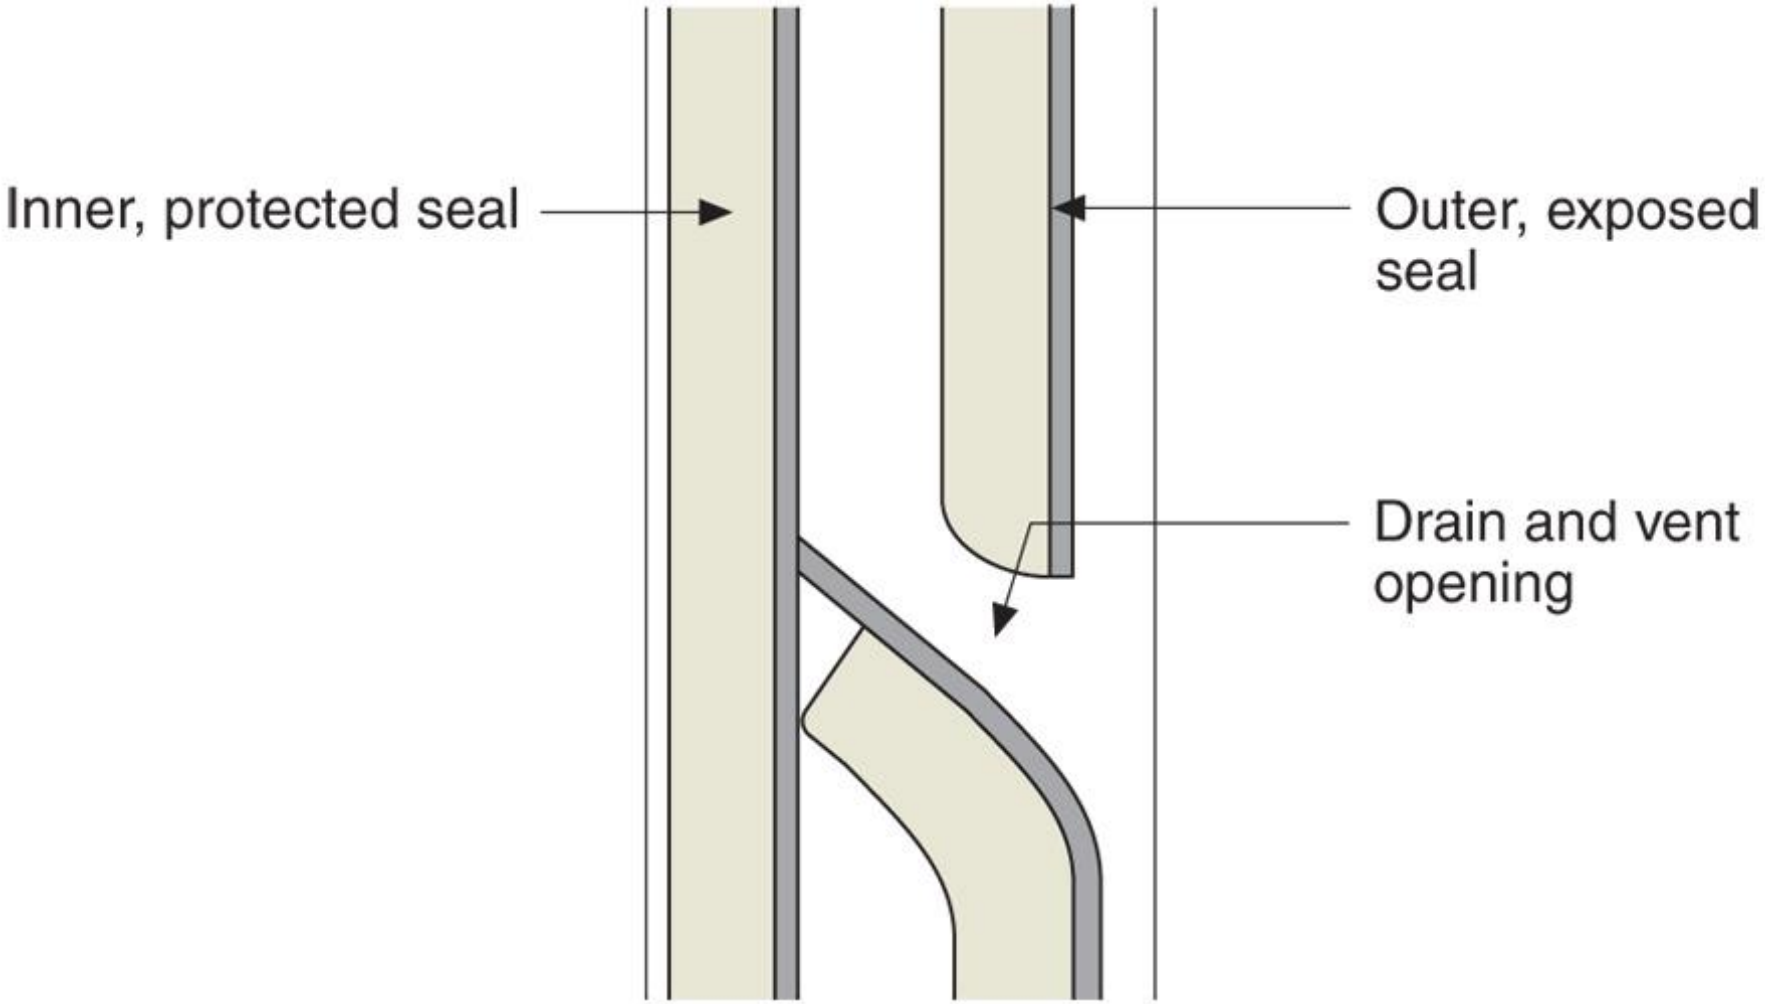
Inner, protected seal
Outer, exposed seal
Drain and vent opening

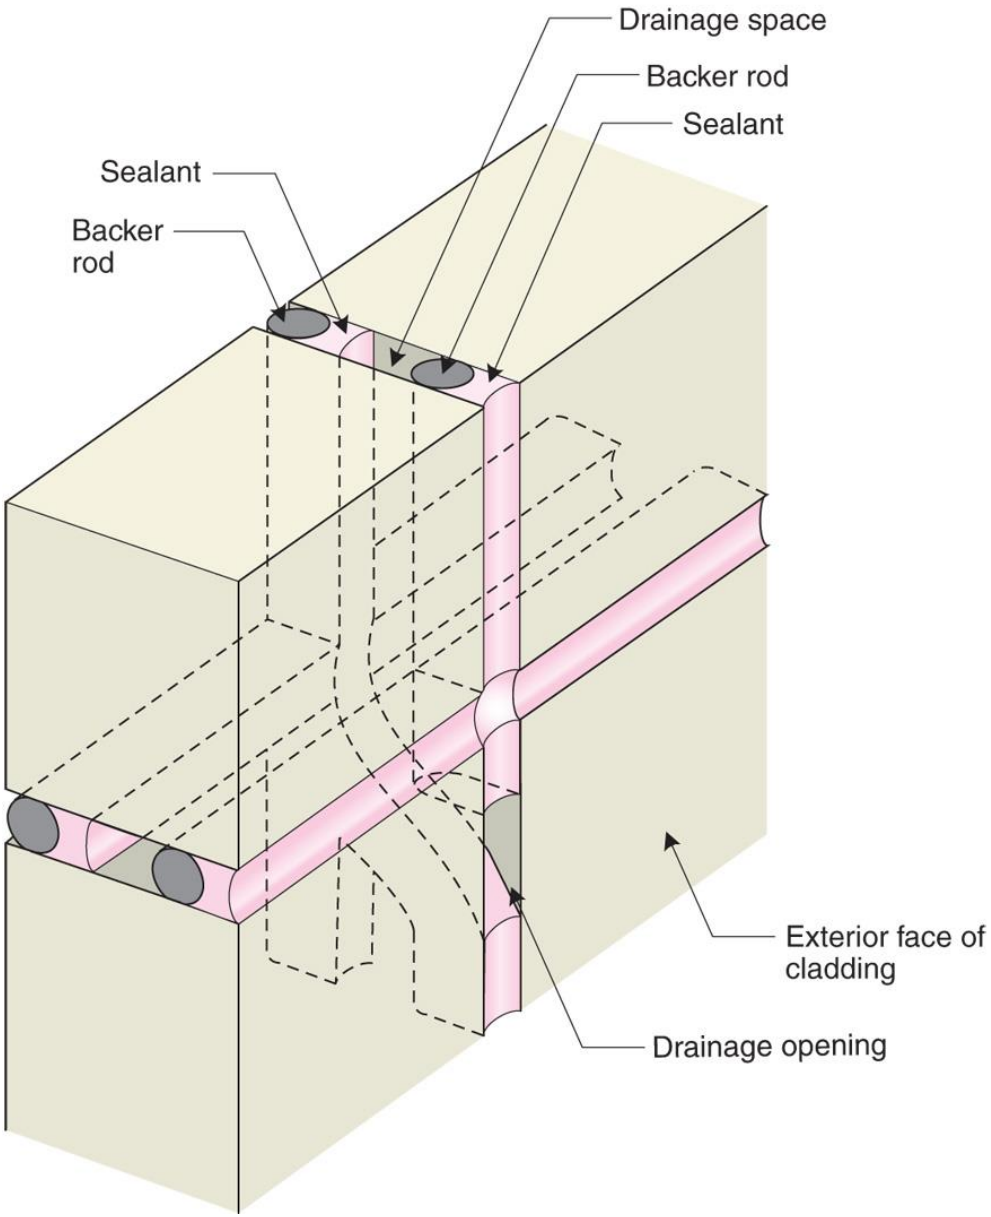
Drainage space
Backer rod
Sealant
Sealant
Backer rod
Exterior face of cladding
Drainage opening

Open Joints vs Closed Joints

Open Joints vs Closed Joints
Limits of Pressure Equalization

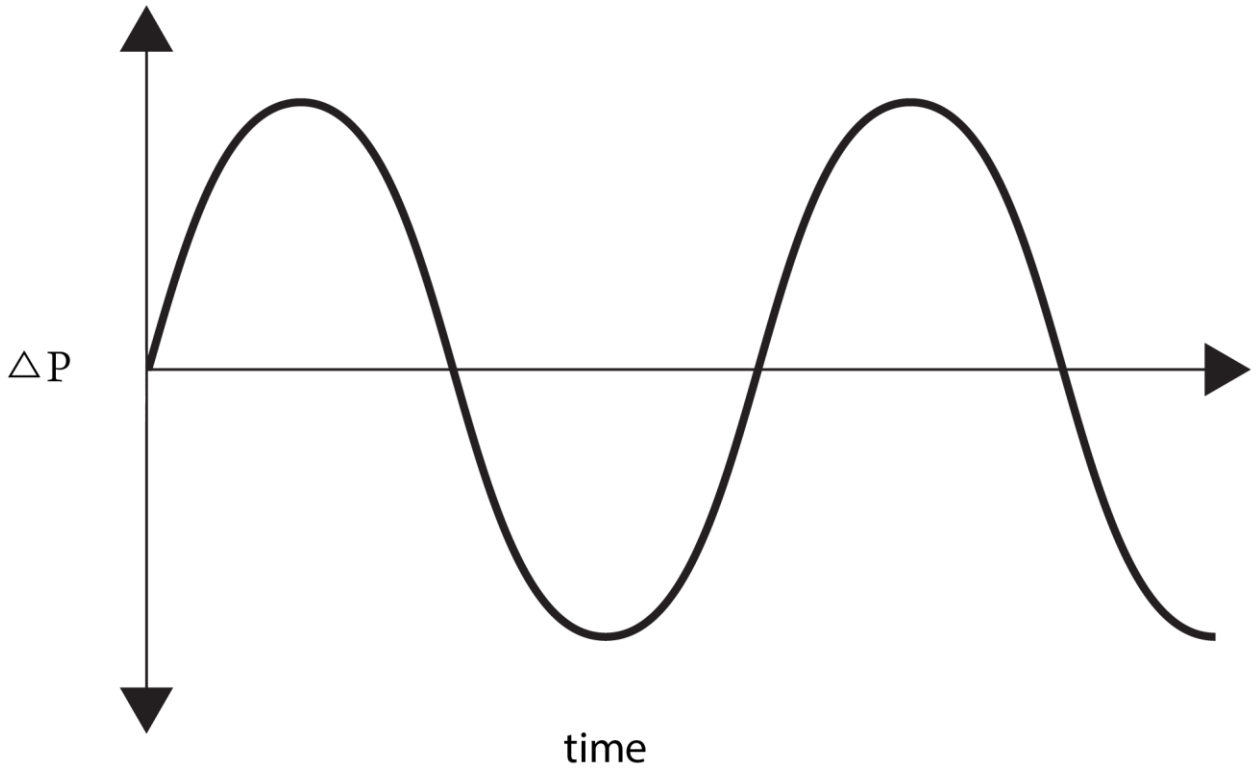
△P
time

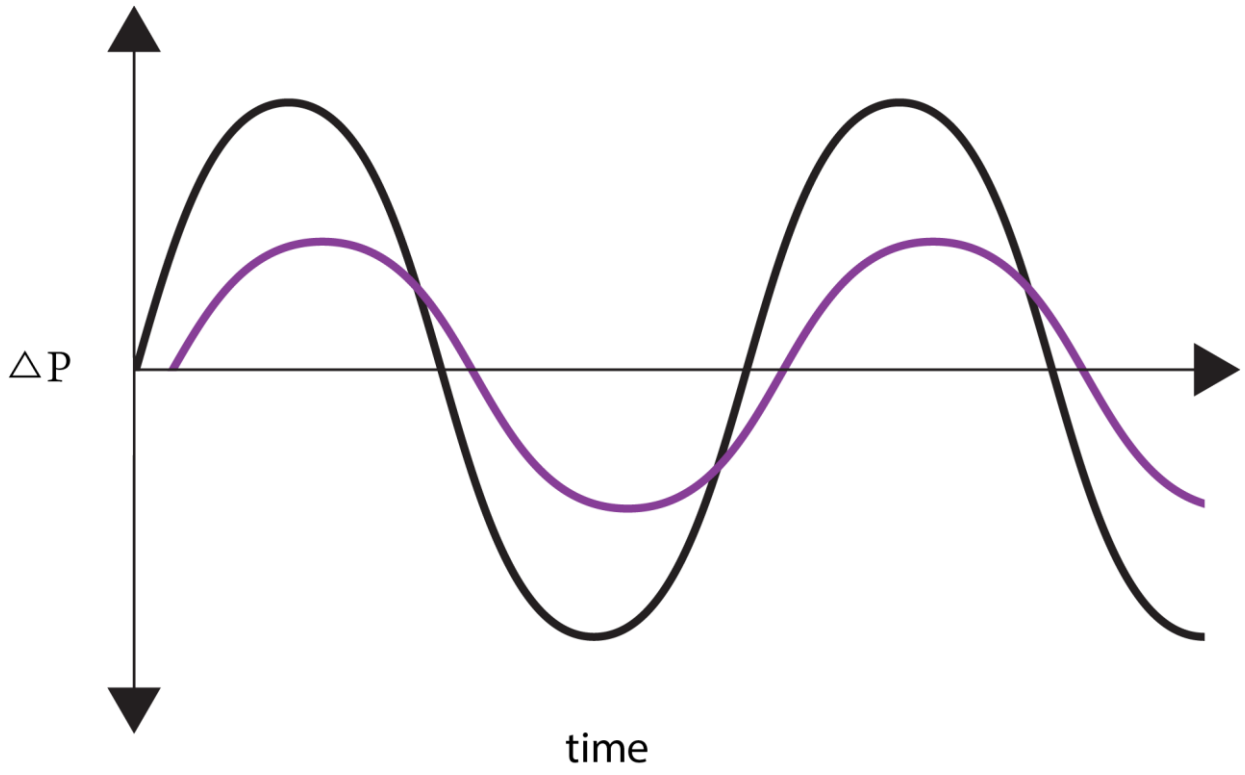
△P
time

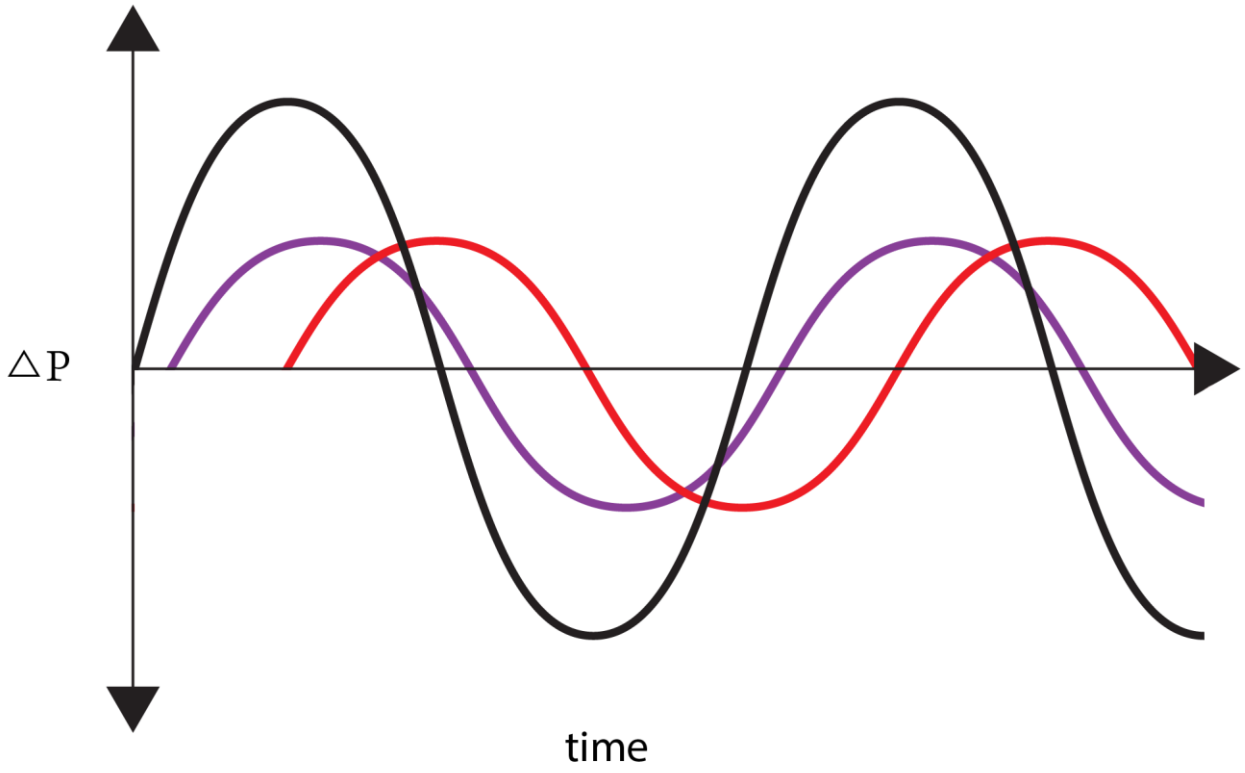
△P
time

Pressure Equalization Needs to be Perfect

Pressure Equalization Reduces Drying

Prevention of Wetting Is Not As Important As Drying

Assume Things Get Wet…Design Them to Dry

Ventilated Claddings Promote Drying